

**CITY OF MERCED
PURCHASING DEPARTMENT
(209) 385-6833
purchasing@cityofmerced.org
REQUEST FOR BIDS
THIS IS NOT AN ORDER**

MAIL SEALED BIDS TO:
678 W 18th St Merced CA
95340

**PARCEL POST OR HAND
DELIVER BIDS TO:**
2525 "O" ST MERCED CA
95340

QUOTE HEREON YOUR LOWEST PRICE F.O.B. MERCED (INCLUDE TAXES [8.25%], DISCOUNTS, REBATES, AND FEES IN UNIT PRICE) FOR THE FOLLOWING EQUIPMENT, MATERIALS, SUPPLIES OR SERVICES. NO ALLOWANCE FOR FREIGHT, CARTAGE, PACKING, OR POSTAGE UNLESS SPECIFIED ON THIS BID. WHERE BRAND OR MAKE IS SPECIFIED, SIMILAR OR EQUAL WILL BE CONSIDERED.

**SEALED BIDS MUST BE IN
THIS OFFICE BY:**
Tuesday, November 23, 2021
2:00 P.M.

DEPT. Fleet
REQUISITION NO. 11232021

Quantity	Unit	Description	Unit Price	Extension
2 (two)	ea	new, conventional chassis, roll-off refuse collection trucks.	\$176,676. ⁶³	\$353,353. ²⁶
<p><i>Note:</i> Submit original and one copy.</p>				
			TOTAL AMOUNT	\$353,353.²⁶

*** BID OPENING WILL BE HELD IN THE PURCHASING OFFICE CONFERENCE ROOM AT 2525 "O" STREET, MERCED, CA ***

We have stated hereon the prices at which we will furnish and deliver the equipment, materials, supplies or services as specified above.

Delivery will be made in 400 days after receipt of order (A.R.O.), except as otherwise indicated.

Note: The City reserves the right to reject any and or all bids, split the bid award, or to accept the bid that best serves the public purpose, even though it may not be the lowest.

COMPANY: Valley Peterbilt
 BY: Ryan Sabean
 TITLE: Salesman
 SIGNATURE: [Signature]
 DATE: 11/10/2021
 PHONE: 209-609-5444
 EMAIL: rsabean@itetrucks.com
 PAYMENT TERMS: (Net 10, 30, 45)

CITY OFFICERS AND EMPLOYEES INELIGIBLE TO BID

Bidders are advised that under Government Code Section 1126 officers and employees of the City of Merced are **not eligible** to bid on City contracts (to provide equipment, materials, supplies, or services to the City) or to enter into a lease or other agreements with the City. Any bid submitted by a City officer or employee, either individually or through a partnership, corporation, or other form of business entity or association, will be rejected and may subject the employee to discipline under the City's Personnel Rules, Article XIX Section 19.02.

NOTICE
ALL BIDS MUST BE SIGNED



CITY OF MERCED
DEPARTMENT OF PUBLIC WORKS
EQUIPMENT BID SPECIFICATIONS
ROLL OFF GARBAGE TRUCK

PART I – BID INSTRUCTIONS

It is the intention of the City of Merced to purchase (2) two new, conventional chassis, Roll-Off Refuse collection truck. It will be operated in business as well as residential areas and will be required to dump in an unimproved landfill site.

Vendors/manufacturers are requested to bid per the specifications.

- A. **Instructions to Bidders:** The complete bid package must be returned intact. Missing pages or missing or incomplete information will be construed by the City to constitute a non-responsive bid. Non-responsive bids will be rejected.

A place has been provided for each section for which the bidder must enter either "Yes", "No" or "Alternate". Specific sections include the make, model, and other descriptive information needed to clearly describe any alternative offered. If additional spaces are needed, securely attach additional page(s) "Statement of Exception" sheet. Additional pages must be numbered clearly and consecutively, include the section number and signed by a responsible company official. The City of Merced reserves the right to waive minor variation(s) if in the opinion of the Fleet Manager the basic unit meets the intent of these specifications.

- A. **Bid Evaluation:** Units offered will be subject to analysis and evaluation by the Public Works Department for quality, construction, material, performance characteristics, and compliance with the specifications. The bid evaluation will include, but not necessarily be limited to, the following factors:
1. Purchase price;
 2. Delivery time in calendar days;
 3. Interchangeability with existing equipment;
 4. Warranty; (To include Body, Chassis, Engine, Transmission, Drive Train, Brake System or other pertinent warranties) Dealership shall register all warranties for the buyer.
 5. Compliance to specifications.
 6. Past Performance.

The City reserves the right to accept or reject any and all bids based on the results of this inspection. Nothing in these specifications or invitation to bid shall restrict the right of the City to purchase the vehicle which best meets the needs of the Refuse Division of the Public Works Depart.

- B. **Bid Response:** The bidder shall submit to the City, a complete bid response package detailing the equipment proposed to meet these specifications. It shall also include warranty, product support information, and delivery time in calendar days.

Note: Bids submitted without a clear statement of delivery time may be rejected.

PART II- GENERAL SPECIFICATIONS

Yes/No/Alternate	<p>A. <u>Books, Manuals, Technical Information and Diagnostic</u> Equipment: Complete & accurate copies of the following items shall be furnished at the time of delivery (or as soon as possible thereafter) of the complete units to the City of Merced:</p>
yes	<ol style="list-style-type: none"> 1. Installation, maintenance, and operating manual/instructions, one printed copy and one electronic copy; 2. Itemized parts list; 3. Performance curve; 4. Complete electric and hydraulic schematic for body and chassis; 5. Five (5) sets of ignition and/or door keys;
yes	<p>B. <u>License and Warranty:</u> The vehicle shall be delivered with the following:</p> <ol style="list-style-type: none"> 1. The original dealer's report of sale and temporary operating permits (if needed). 2. The vehicle is to be licensed for operation in the State of California by the selling dealer. 3. Copies of all warranties shall be supplied and registered at the time of acceptance.
yes	<p>C. <u>Bid Response:</u> The bidder shall submit to the City a complete bid response package detailing the equipment proposed to meet these specifications. The bid response shall also include warranty (if different than that specified in Section G, Part 1), product support information, complete manufacturer's published literature, and delivery time in calendar days starting from notice of award.</p> <p>The unit prices quoted shall remain firm for sixty (60) days. All costs and expenses to meet the requirements of these specifications (including testing) shall be included in the bid response.</p>
yes	<p>D. <u>Warranty/Product Support:</u> The warranty and product support information requested below is important and will be used in evaluating the bids. Bidders are required to address each of the items below and provide the information with the bid.</p> <ol style="list-style-type: none"> 1. The vehicle manufacturer shall provide a new vehicle warranty F.O.B. Merced regardless of the method of delivery for the equipment. <u>Note: Warranty time to start when vehicle is fully operational.</u> 2. The complete chassis and components shall be guaranteed under standard factory and/or dealer warranty and a copy of manufacturer's warranty policy shall be delivered with the vehicle. <u>Note: Warranty shall be a minimum of one (1) year on all components.</u> 4. Engine shall be guaranteed under the longest and most comprehensive standard factory warranty proposed specifically for municipal equipment. Specify coverage the attached spec sheet. 5. In the event of warranty repairs, the City of Merced shall be furnished a "no charge" copy of the work order(s) describing type of repairs and parts replaced.

<p>yes</p>	<p>6. Mounted unit assembly shall be warranted against paint peeling for a minimum of two (2) years.</p> <p>7. List the name and location of the closest warranty and parts dealer for the equipment. The City requires that each shall be within a 120-mile radius of the City.</p> <p>Show location for body and chassis in the space provided:</p> <p>Chassis warranty site: Body warranty site:</p> <p>Name <u>Valley Peterbilt</u> Name <u>Ruckstell CA Sales</u> <u>5837 N Golden State Blvd</u> <u>3399 E. Malaga Ave</u> Address <u>Turlock, CA 95382</u> <u>Fresno, CA 93725</u></p>
<p>yes</p>	<p>E. Safety:</p> <p>1. The equipment shall be equipped with all safety markings required. The safety markings shall be color-coded in compliance with the American National Standard Safety Color Code for Marking Physical Hazards, 253.1 (current edition). In addition, any applicable American National Standard Specifications for Accident Prevention Signs, 235.1 shall be installed.</p> <p>2. The vehicle(s) shall meet all applicable State and Federal OSHA safety requirements.</p>
<p>NO</p>	<p>F. Liquidated Damages: Liquidated damages will be charged at the rate of one-tenth of one percent per calendar day of the unit price of the equipment not delivered in accordance with the time specified on the bid proposal.</p>

PART III CHASSIS SPECIFICATIONS

Commercial Roll-Off Bid Specification

The following is a specification of two new roll-off refuse trucks for lifting and dumping standard industry containers. The intent of these specifications is to cover minimum requirements for two new complete roll-off refuse trucks. Failure to complete this information is grounds for rejection of the bid. Bidders are requested to state wherein your equipment meets, or fails to meet the specifications by checking 'Yes' or 'No' in the provided space. Any exceptions must be noted in 'Offered' column.

CHASSIS SPECIFICATIONS			
	YES	NO	OFFERED
A. CHASSIS WHEELBASE AND FRAME			
1. Conventional three axle chassis Refuse On/Highway Roll Off (See Attachment 1 for specific distances)	X		
2. Wheelbase- 200"		X	262"
3. Cab to Axle – 185.9"		X	192" Required
4. Overhang – 71 to 80"	X		
5. Frames Rails -303.99" steel frame rails.	X		
6. Engine cross member – Lightweight heavy-duty aluminum	X		
7. Bumper- Three piece with collapsible ends		X	one Piece
8. Front tow hooks- frame mounted	X		
9. (2) Solid Mount Cable Hooks	X		
B. FRONT AXLE			
1. Front Axle: Detroit DA-F-18.0-5 18,000# FL1 71.0 KPI/3.74 drop single front axle.		X	Paccar 20K
2. Front Springs - Taper Leaf Springs, Shocks 18,000 lb.		X	20K lbs.
3. Power Steering – TRW TAS-85 power steering		X	Sheppard HD 94
4. Front Brakes –Meritor 16.5x6 Q+ cast spider cam front brakes, double anchor, fabricated shoes.		X	Bendix
C. REAR AXLE AND EQUIPMENT			
1. Rear Axle- MT-40-14xp 40,000# R-series tandem rear axle.	X		
2. Standard Stroke Parking Brakes (Drive Axle)	X		
3. Diff Lock Both Axles -Air Rocker Switch	X		
4. Refuse Service Brakes, Steer and Drive Axles	X		

5. Ratio 5.86 Rear Axle	X		
6. Hendrickson Haulmax HMX400 40,000lb. 54" Spacing 55K Creep Rating	X		
D. ENGINE			
1. Cummins L9- 330hp @ 2000 RPM, 2200 governed RPM, 1000 lb/ft @ 1400 RPM	X		Paccar Labelled
2. CARB Engine Idling Compliance	X		
3. 160 Amp Alternator, Quadramount pad alternator with remote battery volt sense	X		
4. 12 Volt Starter-Delco 38MT heavy duty starter.	X		
5. Batteries-Group 31, 12-volt, maintenance free, threaded stud.	X		
6. Battery Disconnect Switch - Mounted on or near battery box.	X		
7. 18.7 CFM Air Compressor Furnish on engine. Teflon lined stainless steel braided compressor discharge line.	X		
E. TRANSMISSION & EQUIPMENT			
1. Allison 3500 RDS Automatic Transmission- with PTO provision	X		
2. PTO- Muncie CS41 series mounted on side of main transmission	X		
3. (1) Dash Mounted Single Acting Air PTO Control Standard with PTO engaged indicator Light on Class 8 units.	X		
F. TIRES & WHEELS			
1. FF: 20ply 315/80R22.5	X		
2. RR: 14ply 11RR22.5	X		
3. Code-rear Tire Qty 08	X		
4. FF: Alcoa 893657 LVL1 22.5x9.00 Aluminum Wheel – Pilot Mount. 10,000lb load rating per wheel	X		
5. RR: Alcoa 883677 LVL1 22.5x8.25 Aluminum Wheel	X		
G. FUEL TANKS			
1. 80 gallon aluminum fuel tank.	X		
2. DEF Tank- 6 gallon	X		

H. CAB & EQUIPMENT	YES	NO	OFFERED
1. Driver Seat- Air Ride grey vinyl.	X		
2. Passenger Seat- Non-Air Ride grey vinyl.	X		
3. Adjustable Steering Column – Tilt/Telescope	X		
4. Rear Window Back of Cab Standard Tint- 63"x14"	X		
5. Dual Plane Mirrors with Heat Element	X		
6. (2) Convex 8 Inch SS Mirror - Center mounted under mirror bracket. If rear view mirrors are heated; the convex mirrors will be heated.		X	Integrated
7. (1) Air Horn- Chrome		X	Under Cab
8. Triangle Reflector Kit Shipped Loose	X		
9. Backup Alarm (107db) Self Adjusting	X		

PART IV BODY SPECIFICATIONS

The intent of these specifications is to cover minimum requirements for a new roll-off refuse truck. Failure to complete this information is grounds for rejection of the bid. Bidders are requested to state wherein your equipment meets or fails to meet the specifications by checking 'Yes' or 'No' in the provided space. Any exceptions must be noted in 'Offered' column.


A. Body Specifications	Yes	No	Offered
1. ICC Bumper Fixed or Manually Moveable with Locking Pin	X		
2. Fenders Stainless Steel Polished Quarter Fenders	See item	#13	
3. Lighting Full LED	X		
4. Electrical One-Piece Plug & Play Harness	X		
5. Toolbox Steel Lockable 36" x 18" x 18" with Tarp Basket	X		
6. Adjustable Stops (2) Moveable Nose Roller Stops	X		
7. Wear Strips 36" Rail Mounted Wear Strips	X		
8. Tie Downs Dual Ratchet Tie Downs with 3" Straps	X		
9. Safety Props Quick Release Rail Mounted Props	X		
10. Back up Alarm Audible Rear Mounted Alarm	X		
11. Warning Lights Cab Mounted PTO and Raised Rail Warning Light	X		
12. Lubrication Zerk Fittings on All Wear Points	X		
13. Full Fenders Minimizer Full Tandem Polypropylene	X		
14. Tarping System Fully Automatic with Adjustable Gantry	X		

15. Bin Locks Automatic Container Securement Hooks	X		
16. Ground Roller 7" Diameter Rear Frame Roller	X		
17. Install single standard auxiliary hydraulic quick disconnection mounted to driver side rear bumper area for use with compactor roll offs. This setup will include a hydraulic control lever mounted next to outside body lift control levers.	X		
18. Outside cab controls shall include winch cable, rail system/body lift and outside engine throttle controls.	X		
19. Must be compatible with bins that have <i>Universal Understructure</i> .			
B. Lighting			
	Yes	No	Offered
1. All lighting shall meet or exceed DOT and Federal Safety Standards.	X		
2. Clearance, back-up and directional lighting shall be Grote, anti-shock lenses mounted in a protective housing, and shall be pop-out and replaceable.	X		
C. Paint			
	Yes	No	Offered
1. White cab, black chassis.	X		
D. Miscellaneous			
	Yes	No	Offered
1. Install 4 LED work lights 2 ea. at back of cab and 2 ea. in the rear bumper. Two electric switches mounted in cab to operate rear lights.	X		


APPROVED BY:




 Ken Elwin,
 Director of Public Works

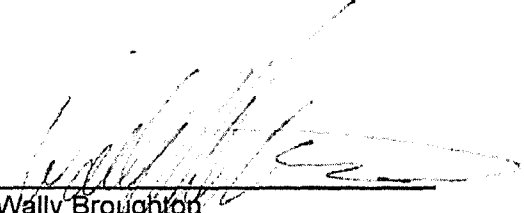

 Wally Broughton
 PWM-Operations

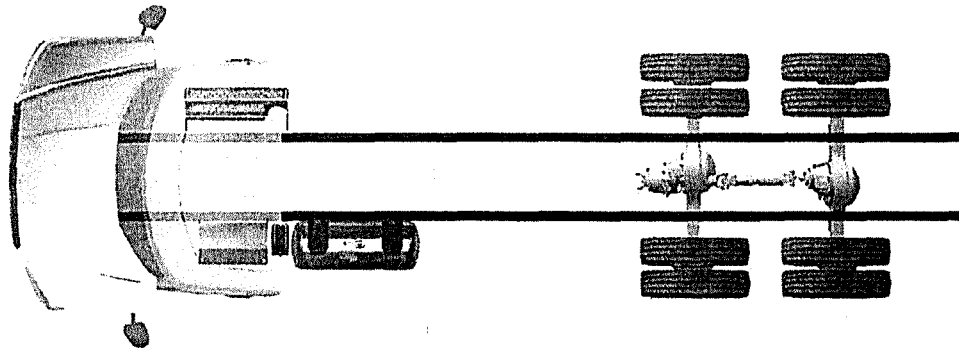

Note: The image displayed is representative only. It should not be construed as a layout diagram. Dimensions and components are not to scale.

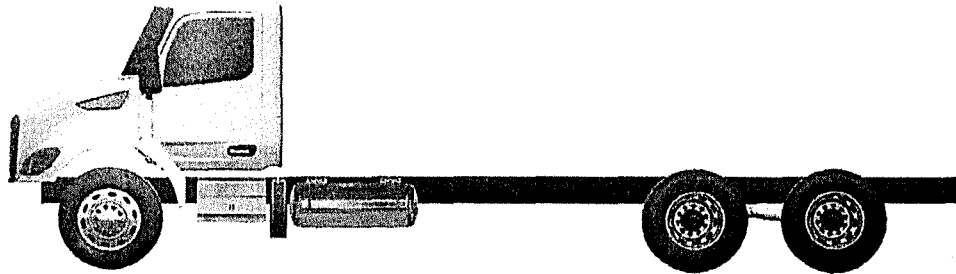

Note: The image displayed is representative only. It should not be construed as a layout diagram. Dimensions and components are not to scale.

Selected Options

Sales Option	Description	Width	Side
6020030	MD Battery Box, Non-Slip Step LH Und...	18	Left
5655019	DEF Tank Small, HD 14 Gal 2.1M MD 5...	15	Left
5586130	D-Shaped Aluminum 80 Gallon Fuel Ta...	20.7	Left
6040550	Aftertreatment Aluminum Non-Slip Cab ...	18	Right

Available Space: Left: 84.1 in. Center: 227.0 in. Right: 136.4 in.

11/10/2021, 10:12:51 AM



Valley Peterbilt, Inc (V305)
 5837 N. Golden State Blvd
 Turlock, California 95382

City Of Merced
 345 W 7Th St
 Merced, California 95341
 United States of America

Ryan Sabean
 Cell Phone: 209-996-9960
 Office Phone: 209-669-5444
 Email: rsabean@itctrucks.com

Wally Broughton

Vehicle Summary

Unit		Chassis	
Model:	Model 548	Fr Axle Load (lbs):	20000
Type:	Full Truck	Rr Axle Load (lbs):	40000
Description 1:	Roll Off	G.C.W. (lbs):	60000
Description 2:			
Intended Serv.:	Application Refuse/On-Highway	Road Conditions: Class A (Highway)	100
Commodity:	Refuse, Scrap, Recycling	Class B (Hwy/Mtn)	0
		Class C (Off-Hwy)	0
		Class D (Off-Road)	0
Type:	Body Roll-Off	Maximum Grade:	6
Length (ft):	24	Wheelbase (in):	262
Height (ft):	13.5	Overhang (in):	80
Max Laden Weight (lbs):	1000	Fr Axle to BOC (in):	69.5
		Cab to Axle (in):	192.5
		Cab to EOF (in):	272.5
No. of Trailer Axles:	0	Overall Comb. Length (in):	382
Type:			
Length (ft):	0	Special Req.	
Height (ft):	0		
Kingpin Inset (in):	0		
Corner Radius (in):	0		
	Restrictions		
Length (ft):	40		
Width (in):	102		
Height (ft):	13.5		

Approved by: _____

Date: _____

Note: All sales are F.O.B. designated plant of manufacture.

Price List: April 1, 2021

100% Complete

Date: November 10, 2021

Deal: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
Base Model				
0005481	S	Model 548	108,586	10,860
0091180	O	Refuse, Scrap, Recycling	0	0
0093035	O	Refuse/On-Highway Truck or tractor which hauls refuse, recycled material, etc. Includes roll-on/roll-off container movement, as well as hauling refuse from transfer stations to, but not into, landfills.	0	0
0095090	O	Roll-Off A rectangular open top dumpster which utilizes wheels and a hydraulically operated bed to roll the dumpster off the truck body onto the ground. Commonly used to transport construction, demolition waste, and other waste types.	0	0
0098170	S	United States Registry Canadian Registry Package Requires Air Conditioning Excise Tax Canada, Speedometer to be KPH ipo MPH, Daytime Running Lights and Rubber Battery Pad in Bottom of Battery Box.	0	0
Configuration				
0200700	S	Not Applicable Secondary Manufacturer	0	0
Frame & Equipment				
0514020	O	10-3/4" Steel Rails 355-384" 10.75x3.5x.375 Dimension, 2,136,000 RBM; Yield Strength: 120,000 psi. Section Modulus: 17.8 cubic inches. Weight: 1.74 lbs/inch pair	409	603
0611300	S	Heavy Duty 5-Piece Crossmember BOC IPO Standard Class 5, 6, 7	0	20
0611790	S	Aluminum Frame Rail Crossmembers Excludes suspension	0	0
0612230	O	Custom Wheelbase or Overhang Engineering approval may be required.	350	0
0613095	O	3-Piece Suspension Crossmembers	64	0
0644090	S	EOF Square without Crossmember End-of-frame square without crossmember. For use with body builder installed crossmember.	0	0
0651010	S	Peterbilt Rear Mudflaps and Straight Hangers Mudflaps aid in protecting the frame and undercarriage from road salt, grime and debris that can cause rust and corrosion. Mud flaps also shield other vehicles from gravel, rocks and road spray.	0	0
Front Axle & Equipment				
1011890	O	PACCAR FX-20 Steer Axle 20,000 lbs. 4" Drop Axle is designed for applications with a gross axle weight rating (GAWR) of 20,000 pounds. Front axle is designed for demanding applications such as construction, heavy haul, refuse, and other	1,678	137

Price Level: April 1, 2021

100% Complete

Date: November 10, 2021

Deal: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
		vocational uses. Robust forged steel beam construction for long-lasting performance. It utilizes innovative tapered kingpin roller bearings for more efficient operation and improved steering efficiency.		
		The PACCAR Steer Axle comes standard with the PACCAR warranty of 5 years, 750,000 miles.		
1114030	O	Taper Leaf Springs, Shocks 20,000 lb Standard with Heavy Resistance Shocks.	661	110
1243050	O	Power Steering Sheppard HD94 Dual For use with 16,000 to 20,000 lb. axle ratings.	890	80
1250250	O	Power Steering Reservoir Frame Mounted w/Cooler A power steering cooler helps reduce the heat of the power steering fluid. This is commonly used with systems that may experience more stress from towing or off-road driving.	161	2
1354845	S	PHP10 Iron PreSet Hubs	0	0
1380070	O	Greasable Front Spring Pins	123	0
1380270	O	Bendix Air Cam Front Drum Brakes 16.5x6 Includes automatic slack adjusters & outboard mounted brake drums.	31	5
1391410	S	Gusseted Cam Brackets, Steer Axle	0	0
1391500	O	TruTurn Lite Brake Drums IPO Standard TruTurn Lite Brake Drums are manufactured to be balanced to improve performance and stay cool during crucial stops.	16	-15
Rear Axle & Equipment				
1526150	O	Meritor MT40-14X 40,000 lb Interaxle diff lock air rocker occupies space of one gauge. Laser factory axle alignment to improve handling & reduce tire wear. Magnetic rear axle oil drain plug captures & holds any metal fragments in drive axle lube to extend service life. Parking brakes on all drive axles for optimal performance. Cognis EMGARD® FE 75W-90 synthetic axle lube provides over 1% fuel economy improvement. Reduces wear & extends maintenance intervals, resulting in increased uptime. Provides improved fluid flow to protect components in extreme cold conditions & withstand the stress from high temperatures, extending component life.	9,414	1,974
1616370	S	PHP10 Iron PreSet Hubs	0	0
1680440	O	Refuse Service Brakes, Steer And Drive Axles Designed for heavy-duty applications for refuse industry, providing long brake life, safety and performance.	95	4
1680450	O	Rear Brake Camshaft Reinforcement Rear brake camshaft reinforcement helps guard against wear and corrosion.	11	9
1680460	O	Heavy Wall, Drive Axle(s)	896	88
1680500	S	SBM Valve Full trucks require a spring brake modulation (SBM) system for emergency braking application. This system requires an SBM valve	0	0

Price Level: April 1, 2021

100% Complete

Date: November 10, 2021

Deal: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
		and a relay valve with spring brakes on the rear axles. The SBM valve allows the foot valve to operate the rear axle spring brakes if a failure exists in the rear air system.		
1680950	S	Stability System Not Selected Or Not Available	0	0
1682430	S	Anti-Lock Braking System (ABS) 4S4M ABS-6. Includes air braking system.	0	0
1684200	S	Synthetic Axle Lubricant All Axles Peterbilt heavy duty models include Fuel Efficient Cognis EMGARD FE75W-90 which provides customers performance advantages over current synthetic lubricants with reduced gear wear and extended maintenance intervals, resulting in increased uptime. In addition, the lubricant provides improved fluid flow to protect gears in extreme cold conditions and withstand the stress from high temperatures, extending component life.	0	0
1687010	S	Bendix Air Cam Rear Drum Brakes 16.5x7 Bendix Air Cam Rear Drum Brakes to fit all heavy haul, construction, refuse and highway truck and tractor applications. Includes Automatic Slack Adjusters & Outboard Mounted Brake Drums.	0	0
1687090	O	Diff Lock Tandem Axles With Speed Interlock. Automatically Disengages Wheel Diff Lock at Speeds Above 25 mph.	1,680	60
1705860	O	Ratio 5.86 Rear Axle	0	0
1824400	O	Hendrickson HMX EX 400 40,000 Lbs., 54" Haulmax, 60K Creep Rating. Includes Traax Rod as standard, option 1920905 is not needed or available. Progressive load spring system easily adjusts to the load for an enhanced combination of empty-ride quality and loaded stability.	4,632	523
Engine & Equipment				
2074407	O	PACCAR PX-9 330@2000 GOV@2200 1000@1200 Productivity (2021 Emissions)	2,266	0
		N21350 C121 68....Maximum Accelerator Pedal Ve		
		N21370 C128 68....Maximum Cruise Speed (P059)		
		N21460 C132 1400..Max PTO Speed (P046)		
		N21520 C133 5.....Timer Setting (P030)		
		N21610 C188 39....Low Ambient Temperature Thre		
		N21620 C189 60....Intermediate Ambient Tempora		
		N21630 C190 80....High Ambient Temperature Thr		
		N21550 C206 35....Engine Load Threshold (P516)		
		N21340 C209 120...Hard Maximum Speed Limit (P1		
		N21510 C225 YES...Enable Idle Shutdown Park Br		
		N21450 C231 NO....Gear Down Protection (P026)		
		N21570 C233 NO....Idle Shutdown Manual Overrul		
		N21440 C234 YES...Engine Protection Shutdown (
		N21480 C238 YES...Auto Engine Brake in Cruise		
		N21470 C239 YES...Cruise Control Auto Resume (
		N21430 C333 0.....Reserve Speed Limit Offset (

Price Level: April 1, 2021

100% Complete

Date: November 10, 2021

Dist: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
		N21410 C334 0.....Maximum Cycle Distance (N202 N21590 C382 YES...Enable Hot Ambient Automatic N21500 C395 0.....Expiration Distance (N209) N21530 C396 YES...Enable Impending Shutdown Wa N21540 C397 60....Timer For Impending Shutdown N21320 C399 120...Standard Maximum Speed Limit N21400 C400 252...Reserve Speed Function Reset N21420 C401 10....Maximum Active Distance (N20 N21330 C402 0.....Expiration Distance (N207)		
2091130	S	VMUX Electronics Architecture	0	0
2091305	O	Engine Idle Shutdown Timer Enabled	0	0
2091315	O	Enable EIST Ambient Temp Override	0	0
2091372		Eff EIST NA Expiration Miles	0	0
2091640		Effective VSL Setting NA	0	0
2092012	O	Typical Operating Speed 55 MPH	0	0
2092031	S	Powertrain Optimized for Fuel Economy Best analysis for vehicles which operate at or near cruise speed 90 plus percent of time.	0	0
2140200	S	CARB Engine Idling Compliance PACCAR PX-7, PX-9 and MX, Cummins X15 and ISX diesel engines will include the required factory installed serialized sticker on the drivers door to identify them as meeting the NOx idling standard.	0	0
2140450	O	Remote PTO/Throttle, 12-Pin Eng Bay Remote Control Provision	73	0
2140660	O	CARB Compliant Engine	0	0
2513060	S	PACCAR 160 Amp Alternator, Brushed PACCAR 160 AMP alternator, brushed producing 160 Amps at road speed and 100 Amps at idle.	0	0
2522110	S	PACCAR 12V Starter, N/A PACCAR MX Engines PACCAR 12-volt electrical system. With centralized power distribution incorporating plug-in style relays. Circuit protection for serviceability, 12-volt light system w/circuit protection circuits number & color coded.	0	0
2538100	O	2 PACCAR AGM 12V Batteries 1850 CCA	-89	0
2539840	O	MD - Battery Disconnect Switch Mounted on Battery Box	391	9
2621130	O	Belt Driven Variable Speed Fan Clutch PX9 Engine PX7/ PX9/L9N/B6.7N. The belt-driven fully variable speed fan drives communicate directly with the PX9 ECM through the included electronic controller, managing the fan speed to match the exact amount of cooling required. The optimized setup creates smoother engagements, reduces noise and frees up available horsepower. These fan drives are	716	0

Price Level: April 1, 2021

100% Complete

Date: November 10, 2021

Deal: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
		also maintenance-free. A belt, additional pulleys, idlers, tensioners, and a drive hub are included to drive the fan.		
2723210	S	18.7 CFM Air Compressor N/A X15. Furnished on engine. Teflon lined stainless steel braided compressor discharge line.	0	0
2812210	S	VGT Exhaust Brake (Variable Geometry Turbo). Provides approximately 90-100 HP of retardation and is part of the turbocharger.	0	0
2921110	S	PACCAR Fuel/Water Separator Standard Service PACCAR Fuel/Water separator standard service intervals. High efficiency media protects critical engine components.	0	0
2921210	S	No Fluid Heat Option for Fuel Filter	0	0
2921310	S	No Electric Heat Option for Fuel Filter	0	0
3010400	O	Engine Protection Shutdown w/ Label Includes oil pressure, oil temperature, coolant temperature, and intake manifold temperature.	5	0
3114270	S	High Efficiency Cooling System Cooling module is a combination of steel and aluminum components, with aluminum connections to maximize performance and cooling capability. Silicone radiator & heater hoses enhance value, durability, & reliability. Constant tension band clamps reduce leaks. Chevron Delo Extended Life Coolant (NOAT) extends maintenance intervals reducing maintenance costs. Anti-freeze effective to -30 degrees F helps protect the engine. Low coolant level sensor warns of low coolant condition to prevent engine damage. Radiator Size by Model: 579/367 FEPTO 1325 sq in, 567/365/367: 1440 sq in, 365 FEPTO: 1184 sq in, 389/367 HH: 1669 sq in, 348: 1000 sq in, 520: 1242 sq in.	0	0
3211140	S	(1) Air Cleaner Engine Mounted	0	0
3365280	S	Exhaust Single RH Horizontal DPF/SCR RH Under Cab.	0	0
Transmission & Equipment				
4052230	O	Allison 3500 RDS-P Transmission, Gen 5 Rugged Duty Series. Includes Rear Transmission Support except on MX engines, Mobil Delvac Automatic Transmission Fluid, and Water-Oil Heat Exchange. Also includes features that monitor the transmission fluid, filter and clutch condition. Will display percent life remaining for the transmission fluid, filter and clutches on the shift selector. This information may be displayed using the Mode and Up and Down buttons. A wrench icon will also be included to indicate when the transmission fluid, filter or clutches need servicing. Suited for vehicles operating on/off highway and/or requiring PTO operation. Forward ratios: 1st-4.59, 2nd-2.25, 3rd-1.54, 4th-1.00, 5th-0.75, 6th-0.65. Reverse ratios: DR-(5.00).	6,684	459
4210320	O	1710 HD Driveline, 2 Midship Bearings	667	0
4233910	O	(1) Dash Mounted Single Acting EOH PTO Control	93	1

Price Level: April 1, 2021

100% Complete

Date: November 10, 2021

Deal: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
		Electric-over-hydraulic, spec'ing PTO switch does not ensure the PTO will fit. Sends signal to Allison to engage PTO.		
4252170	O	Auto Neutral Activates With Parking Brake Auto Neutral helps improve jobsite safety by reducing the possibility of the truck moving due to throttle application.	17	0
4252890	O	Allison FuelSense 2.0 Not Desired	0	0
4252950	O	Omit Allison Neutral At Stop	0	0
4253090	O	Severe Service Rear Transmission Support Spring	21	0
4256680	O	Allison 6-Speed Configuration, Wide Ratio Gears	0	0
4256870	O	Allison Output Function S Neutral Indicator Allison output function S Neutral Indicator for PTO. Required on Refuse Packer Applications. With this configuration NEUTRAL only, PTO engagement is permitted only when the transmission is in Neutral. Once the transmission is in Neutral, the PTO is automatically engaged and fast idle is initiated when the PTO switch is on. In addition with this configuration Pack-on-the-fly, the PTO is automatically engaged and fast idle is initiated when the PTO switch is On concurrently with shifting of the transmission to Neutral.	0	0
4256920	O	Dash Mounted Push Button Shifter Available with Allison transmissions	513	3
4256990	O	Rolling Direction Change Shift Inhibit Feature Allison transmissions. A programmable feature that keeps the transmission from shifting from Drive to Reverse or from Reverse to Drive above a preset speed. This wireless function is enabled when a switch is closed to complete the circuit between input wire 101 and ground. Frequently the function is interfaced with a switch indicating activation of another vehicle function, such as application of the service brakes. When the function is enabled, the TCM will recognize the request for a direction change shift, Reverse-to-Drive or Drive-to-Reverse. If all other operating conditions are acceptable, the TCM will command the requested shift. The enable remains in effect until the switch is opened, followed by the selection of a different direction, Reverse or Drive, at the shift selector. This could be used for doc spotters and refuse. If the function is not enabled, any shift which results in a change of direction is inhibited.	0	0
4257110	O	LH Mounted Trans PTO Provisions	31	0
Air & Trailer Equipment				
4510190	S	Bendix AD-HF Air Dryer, Heater Bendix AD-HF air filters protects the life of your engine system and components. Proven PuraGuard oil coalescing technology in the the air dryer cartridge. This oil coalescing filter ensures the removal of oil and oil aerosols before they can contaminate the moisture removing desiccant.	0	0
4540420	S	Nylon Chassis Hose	0	0

Price Level: April 1, 2021

100% Complete

Date: November 10, 2021

Deal: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
4543340	O	Aluminum Painted Air Tanks All air tanks are aluminum with painted finish except when Code 4543330 Polish Aluminum Air Tanks is also selected (then exposed air tanks outside the frame rails will be polished aluminum). Peterbilt will determine the optimal size and location of required air tanks. Narratives requesting a specific air tank size or location will not be accepted for factory installation. See ECAT to determine number or location of air tanks installed.	-35	-45
4611930	O	Body Connections 5' BOC Junction box contains light and power circuits for body connections located 5' from back-of-cab	85	4
Tires & Wheels				
5064010	O	FF: BR 20ply 315/80R22.5 M870 Efficiency Rating: Fair Diameter= 42.8 inches; SLR= 19.9 inches The Bridgestone M870 is a high scrub All-Position Radial tire designed specifically for urban waste collection.	663	94
5161070	O	RR: BR 14ply 11R22.5 M713 Ecopia Efficiency Rating: Optimal Ecopia is an ultra-fuel-efficient drive radial designed for tandem axle applications in long-haul and regional service.	804	8
5190008	O	Code-rear Tire Qty 08	0	0
5220520	O	FF: Alcoa 89U637 22.5 X 9.00 High Polish Aluminum, Ultra ONE technology that saves more than 50 lbs. versus a comparable steel wheel. Built for refuse, logging, mining and other heavy haul applications that demand a tough wheel. Each wheel offers a 10,000 lbs. load rating.	462	-30
5320710	O	RR: Alcoa 882677 22.5X8.25 High Polish Aluminum. High polish finish on both sides as applicable. Finish options for heavy-duty trucks, 2.5 lbs. weight savings, new hub bore with less metal to metal contact to hinder corrosion with a maintained half dual space and load rating.	1,272	-176
5390008	O	Code-rear Rim Qty 08	0	0
Fuel Tanks				
5586130	O	D-Shaped Aluminum 80 Gallon Fuel Tank LH BOC	77	20
5604080	O	Location LH BOC 80 Gallon	0	0
5652890	S	DEF Tank Mounted LH BOC Models 220 and 520 mounted left hand back-of-cab.	0	0
5652980	S	DEF To Fuel Ratio Between 1:1 And 2:1	0	0
5655019	S	DEF Tank Small, HD 14 Gal 2.1M MD 5.5 Gal	0	0
5660570	O	(1) Low Flex Step U/C, Aftertreatment Only	240	11

Price Level: April 1, 2021

100% Complete

Date: November 10, 2021

Deal: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
Battery Box & Bumper				
6020030	S	MD Battery Box, Non-Slip Step LH Under Cab	0	0
6030660	S	Plastic Battery Box Cover	0	0
6040550	S	Aftertreatment Aluminum Non-Slip Cab Entry Aftertreatment right-hand under cab step. DPF/SCR for diesel engines, catalyst for natural gas engines. On Models 579 specifying chassis fairings, the box is aerodynamic.	0	0
6112530	O	Aero Bumper Molded One Piece Painted Two tow points	113	11
Cab & Equipment				
6510160	O	Aerodynamic 109in BBC Aluminum Cab & SMC Hood With molded gray crown.	1,163	15
6540160	O	Thermal Insulation Package in Cab Includes thick, closed-cell foam in floor, special mylar-faced foam in walls and roof structure.	67	2
6917320	S	Seats Inc. Driver Seat	0	0
6927320	S	Seats Inc. Passenger Seat	0	0
6930500	O	Drivers Armrest - RH Only	28	2
6939110	S	Toolbox Under Passenger Seat Non-Suspension Seat	0	11
6939400	S	Air Ride Driver	0	0
6939430	S	Mid Back Driver	0	0
6939470	S	Vinyl Driver	0	0
6939510	S	Non-Air Ride Passenger	0	0
6939530	S	Mid Back Passenger	0	0
6939570	S	Vinyl Passenger	0	0
7001520	S	Adjustable Steering Column - Tilt/Telescope	0	0
7001620	S	Steering Wheel With Peterbilt Logo Steering Wheel with embossed Peterbilt logo over horn button.	0	0
7036140	S	Interior Gray/Black - Flat Roof	0	0
7210540	S	Day Cab Rear Window Day cab rear window flush to back of cab.	0	0

Price Level: April 1, 2021

100% Complete

Date: November 10, 2021

Deal: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
7210550	S	1-Piece Glass Rear Cab Window Fixed	0	0
7230060	S	1-Piece Curved Windshield	0	0
7230360	S	Power Door Locks and Power Window Lifts Standard	0	0
7322010	S	Combo Fresh Air Heater/Air Conditioner With radiator mounted condenser, dedicated side window defrosters, Bi-Level Heater/Defroster Controls, 54,500 BTU/HR, and silicone heater hoses.	0	0
7330880	O	Additional Fine Particulate Filter For HVAC Syst 3 micron filtration. For use in extreme high dust applications. Not available with Ember filter 7330890.	17	1
7510070	S	Aero Rear View Mirror Housing, Molded Black	0	0
7514000	O	Peterbilt Aero Rear View Mirror, Non-Motorized Includes top mirror with non-motorized, adjustable dual axis heated glass. Bottom mirror is an integrated convex surface. Includes black textured arms with breakaway feature.	50	0
7514050	S	Look Down Mirror Over Passenger Door with Black Housing	0	0
7610500	S	Air Horn Mounted Under Cab	0	0
7722120	O	ConcertClass, AM/FM, Weatherband, 3.5 Aux	331	11
7725710	O	Standard Speaker Package For Cab (2) Speakers	50	4
7728040	O	Bluetooth Phone and Audio Requires USB Port	46	0
7728050	O	USB Port	46	0
7851480	S	Peterbilt Electric Windshield Wipers With Intermittent Feature.	0	0
7852020	O	Cab Air Suspension	150	15
7852050	O	Auto Reset Circuit Protection Daycab and Sleeper	19	0
7900025	O	Fire Extinguisher, Passenger, Inboard Air seat base, Hazmat approved UL listed/rated ABC	52	9
7900090	O	Triangle Reflector Kit, Ship Loose Florescent triangle emergency road flares are designed to meet and exceed all DOT standards.	18	13
7900520	O	Headlamps To Turn On When Wipers On	0	0
7901130	O	Backup Alarm (107 DB)	35	3
8011850	O	Transmission Oil Temperature (Main) Located in Digital Cluster Display.	24	0

Price Level: April 1, 2021

100% Complete

Date: November 10, 2021

Deal: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
8021380	S	Air Restriction Indicator Mounted on air cleaner, intake piping, or firewall	0	0
8021810	O	Brake Application Air Pressure (Tractor) Located in Digital Cluster Display.	0	0
8070080	O	(2) Additional Dash Switches With Wiring Located on dash panel C. Availability subject to dash space. Includes 4" 14 gauge wire with butt splice at rear of each additional switch.	96	0
8070390	O	Engine Hourmeter Gauge Located in Digital Cluster Display	0	0
8070450	O	Engine PTO Hourmeter Gauge Located In Digital Cluster Display	0	0
8070810	O	Engine Manifold Pressure (Turbo Boost) Located in Digital Cluster Display	0	0
8070820	O	Engine Percent Torque Located in Digital Cluster Display	0	0
8070860	S	Main Instrumentation Panel Digital Cluster 7" Display includes: Physical (Analog) - Speedometer, Tachometer, Oil Pressure, Coolant Temp and Display Gauges - Fuel Level, DEF Level, DPF Filter Status, Fuel Economy, Volts Telltale, OAT and Primary Air Pressure, Secondary Air Pressure for air brake trucks.	0	0
8070940	O	Voltmeter Gauge (MD / 520 ONLY) Located in Digital Cluster Display	0	0
8073040	O	(1) Additional Electric Over Air Switch On/off only, switch has green indicator light, air connections on frame rail under cab. One accessory solenoid bank with plug on it.	36	1
8111110	S	Headlights Composite Fender Mounted Integral park, turn, and side marker	0	0
8120980	S	(5) Marker Lights, Aero LED	0	0
8134160	S	Self-Canceling Turn Signal	0	0
8134180	O	Daytime Running Lights, Mounted In Bumper Driven by chassis height	191	0
8140080	S	LED Stop/Turn/Tail/Backup Bracket mounted left-hand / right-hand end of frame	0	-7
8140850	S	Moveable EOF Crossmember For Mounting Tail Lights Square end of frame with or without end of frame crossmember	0	1
Paint				
8500710	S	Standard Paint Color Selection	-200	0
8530770	S	(1) Color Axalta Two Stage - Cab/Hood Base Coat/Clear Coat N85020 A- L0006EY WHITE N85700 BUMPER L0006EY WHITE N85500 CAB ROOF L0006EY WHITE N85300 FENDER L0006EY WHITE N85200 FRAME L0001EA BLACK	0	0

Price Level: April 1, 2021

100% Complete

Date: November 10, 2021

Deal: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



Sales Code	Std/ Opt	Description	\$ List	Weight
		N85400 HOOD TOP L0006EY WHITE		

Shipping Destination

Options Not Subject To Discount

9400091	S	Peterbilt Class 7 Standard Coverage 1 year/Unlimited Miles/km	0	0
9400094	S	PACCAR PX-9 Standard Coverage 2 yrs/250,000 mi (402,336 km)/6,250 hrs	0	0
9407103	O	Prepaid Freight Delivery Increase For 2022 Delivery	500	0
9408701	O	Base Warr: Emissions (CARB Surcharge) 5YR/150K MI - PX-9 Engine	2,460	0

Miscellaneous

9409045	S	Aero Hood (MODEL 548)	0	0
9409055	O	State Registry: California	0	0
9409791	O	Peterbilt Motors Company	0	0
9409897	O	Cancel/Reorder Reorder Chassis	0	0

Promotions

Order Comments

Total List Price (W/O Freight & Warranty & Surcharges)	\$146,985
Marketing and Service Support Fee	\$895
Prepaid Freight	\$2,800
Total Surcharge/Options Not Subject To Discount	\$2,960
Total Weight	14,910

Prices and Specifications Subject to Change Without Notice.

Unpublished options may require review/approval.
Dimensional and performance data for unpublished options may vary from that displayed in CRM.

PRICING DISCLAIMER

While we make every effort to maintain the web site to preserve pricing accuracy, prices are subject to change without notice. Although the information in this price list is presented in good faith and believed to be correct at

Price Level: April 1, 2021

100% Complete

Date: November 10, 2021

Deal: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



the time of printing, we make no representations or warranties as to the completeness or accuracy of this information. We reserve the right to change, delete or otherwise modify the pricing information which is represented herein without any prior notice. We carefully check pricing specifications, but occasionally errors can occur, therefore we reserve the right to change such prices without notice. We disclaim all liability for any errors or omissions in the materials. In no event will we be responsible for any damages of any nature whatsoever from the reliance upon information from these materials. Please check your order prebills to confirm your pricing information

Price Level: April 1, 2021

100% Complete

Date: November 10, 2021

Deal: Roll Off

Quote Number: QUO-882672-L7Z6Z5

Printed On: 11/10/2021 10:21:33 AM



Shipping Destinations

Intermediate Destination: NONE

Final Destinations	Quantity
--------------------	----------



12266 Branford Street
 Sun Valley, CA 91352
 (818) 899-1111
 (818) 897-4366
 sales@spartantruck.com
 www.spartantruck.com

Date: October 19, 2021
 Quote #: _____
 PO #: _____
 Quoted By: Jesse Aranda
 Deliver by: _____


SPARTAN
 TRUCK COMPANY, INC.

SPARTAN ROLL OFF UNIT - MODEL SRO60SC - QUOTE

Customer	
Bill To:	Ruckstell California Sales Co. Inc. 3399 E. Malaga Ave. Fresno Ca 93725
Contact:	Ed Inahara
Phone:	559-233-3277
Fax:	
Email:	ed@ruckstell.com
Ship To:	FOB-Sun Valley Ca City Of Merced
Contact:	Jesse Aranda
Phone:	916-897-3762
Fax:	
Email:	jesse@spartantruck.com

Chassis	
VIN:	_____
Year:	_____
Make:	_____
Model:	_____
	<input checked="" type="radio"/> New <input type="radio"/> Used
	Color: _____
	License Tag: _____
	Equipment: _____

CA (Cab to Axle) 186" Without Auto Tarp System / 192" with Auto Tarp System.
 Minimum 80" clear frame required on chassis (forward of suspension on both sides)
 Minimum 60" after frame (Measured from the Center of the Trunnion)
 In Cab PTO Activation Switch & Wiring

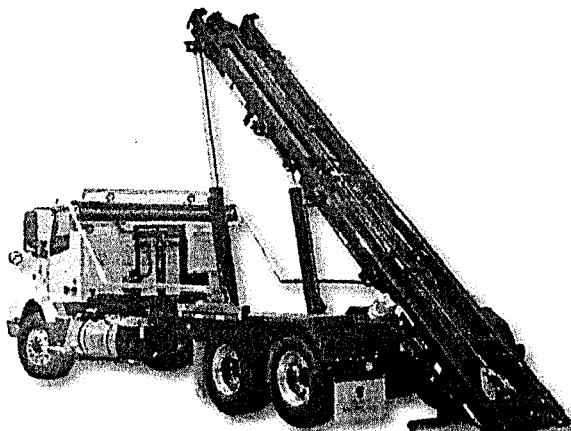

Additional Comments:

Spartan Roll Off Unit: Model SRO60SC (TARE WEIGHT 6,200 LBS) - QUOTE

\$ 29,490.00

STANDARD FEATURES	PRICE	QTY	TOTAL
Frame Rail 4" x 10" x 3/8" rectangular steel tubing 34.5" wide, 1/4" reinforcement to top of rear 36" of rails	Standard		
Rollers			
Hoist System (2) 8" Bore x 4" Chrome Rod Cylinders. 60,000 lb combined rated lift capacity	Standard		
Lift Cable Steel cable 3/4" With Master link End (66,000 lb Capacity)	Standard		
Reeving System Single cylinder reeving system, 7" Bore x 4" Chrome Rod (60,000 lb Capacity)	Standard		
PTO System Muncie/Chelsea "Hot shift" for Automatic transmission with P51 Permco Pump, 28 - 32 GPM pump@1000RPM	\$750	1	\$ 750.00
Oil Tank 37 Gallon Hyd Oil Reservoir includes 40 Micron Strainer & 10 Micron In tank Return Filter	Standard		
Hydraulic Valve Parker VA35 (3) Bank hydraulic system 2200 PSI Operating Pressure, Max Flow 65GPM	Standard		
Fenders Full fenders - Minimizer 4000B Tandem Poly Fenders with Mounting Brackets	\$1,000	1	\$ 1,000.00
Inside Controls In Cab Air Control Console with PTO & Bed Up Light (Dual Handle)	Standard		
Paint Sherwin Williams - Black Primer base Coat with Gloss Black Enamel Top Coat	Standard		
Tool Box 36" X 18" X 18" Steel Toolbox With 3 Point Lockable T Handle, Door Chains & Rain Gutter	Standard		
ICC Bumper Manually Retractable ICC Bumper bar with Locking Pin (Underride Protection)	Standard		
Bin Tiedowns (2) Manual combo winches with straps and winch bar for container securement	Standard		
Extra Stops (2) Adjustable Bin stops for Hoist Main frame along with Frame Mounted Housing	Standard		
LED Lighting LED Lighting with one Piece Plug & Play Electrical Harness	Standard		
SPECIAL OPTIONS			
Trailer Hitch None	Standard		
Tarping System Install automatic tarping system with control valve and levers on driver side (PIONEER 4500 SARG)	\$9,950	1	\$ 9,950.00
Automatic Bin Locks Automatic Container securement hooks (Electric over Hydraulic) PTO Activated	\$1,950	1	\$ 1,950.00
Ground Roller Installed at rear of frame rail	\$620	1	\$ 620.00
Compactor Hyd setup at rear of truck for operation - Includes Valve Sect, Hyd Lines, Quick Disconnects	\$1,370	1	\$ 1,370.00
Floodlights (2) Floodlights Mounted on Tarp Gantry	\$500	1	\$ 500.00
Remote Throttle None	Standard		
Outside throttle operation - control button and cable provided - truck oem or dealer is responsible for programming and connecting electronic control for remote PTO/throttle operation (1 Speed @ 1400rpm)	Standard		

Unit Subtotal \$ 45,630.00

F.O.B. - Sun Valley Factory

Number of Units Ordered 1

Order Subtotal \$ 45,630.00

Steel Surcharge 5.00% \$ 2,281.50

Total \$ 47,911.50

Down Payment \$ -

Net Sales Price \$ 47,911.50

Payment Terms:

Paid In Full Upon Completion

Shipment **45-60 Days** After
Reception of Unit

Date Approved: _____

Authorized By

Signature

Name (printed)

Customer Initials _____

FOR ALL INQUIRIES

PLEASE CONTACT YOUR SPARTAN REPRESENTATIVE AT
(818) 899-1111 OR FAX YOUR INQUIRIES TO (818) 897-4366.

TERMS & CONDITIONS

Work Authorization

I Ruckstell California Sales Co. Inc. , hereby authorize work to be done with the necessary material, and hereby grant your employees permission to operate the vehicle herein described on streets, highways or elsewhere for the purpose of testing and/or inspection. Cost will be no more than the estimated price. However, if Spartan Truck Co., Inc. ("Spartan") discovers that different or additional parts or repairs are needed, a Spartan representative will contact customer for approval of a revised estimate. I have read and understand the estimate and terms below. I authorize the service to be performed including sublet work and acknowledge receipt of this estimate.

Notice to Customer

Customer is hereby notified that the said property is not insured or protected to the amount of the actual cash value thereof, or otherwise against loss occasioned by theft, fire or vandalism while the property remains with Spartan.

Spartan is not responsible for unavailability of materials or delays in materials shipment beyond Spartan's control.

Parts returned for credit must be accompanied by this document or the appropriate invoice or packing slip and after (10) days are subject to a 15% handling charge. Parts special ordered or custom made are not returnable. No return policy on electrical or sheet metal parts. Defective goods will be repaired or replaced, but no claims allowed for labor damage. Prices are subject to change without notice.

ALL ACCOUNTS ARE DUE AND PAYABLE 30 DAYS FROM INVOICE DATE. A FINANCE CHARGE OF 1 1/2% PER MONTH (ANNUAL RATE OF 18% WILL BE CHARGED ON ALL PAST DUE ACCOUNTS).

VEHICLES/EQUIPMENT THAT REMAIN UNCLAIMED AFTER 10 DAYS FROM COMPLETION OF WORK WILL BE SUBJECT TO STORAGE FEES OF \$35 PER DAY.

NO Cooling Off Period

California law does not provide for a "cooling off" or other cancellation period for vehicle sales. Therefore, you cannot later cancel this contract simply because you change your mind, decide the vehicle costs too much, or wish you had acquired a different vehicle. After you sign this contract, you may only cancel it with the agreement of Spartan or for legal cause, such as fraud.

Applicable Law

Federal law and California law apply to this agreement. If any part of this agreement is not valid, all other parts stay valid. Spartan may delay or refrain from enforcing any of its rights under this agreement without losing them.

Warranty, Parts & Exchange Components

Spartan warrants new parts sold by it to be free from defects in material and workmanship subject to the following provisions. Such parts will be provided without charge to the user at a place of business of a Spartan maintenance department or other establishment authorized by Spartan Truck Co., Inc.

Parts and Labor Warranty are as follows: a) New parts have one (1) year warranty; b) All rebuild and/or repaired parts have ninety (90) days warranty; c) All labor repairs have ninety (90) days warranty. Spartan will provide a new or a rebuilt part, whichever Spartan elects, in place of any parts which are found upon its inspection to be defective in material or workmanship. Parts that fail due to abuse, misuse, neglect, alteration or accident are not covered.

THIS WARRANTY IS EXPRESSLY IN LIEU OF ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Remedies under this warranty are expressly limited to the provision of parts as specified above and any claims for loss arising out of the failure of the parts or exchange components to perform for any period of time, or other economic or moral loss, or direct, immediate, special, indirect or consequential damage are expressly excluded.

In addition to any and all other legal remedies available, I (customer) authorize your repair facility to place a lien on the vehicle described herein for all charges for repairs, including labor and parts, storage and/or towing. To enforce such lien, Spartan is hereby expressly authorized to sell the said vehicle at public auction after giving twenty (20) days written notice by certified mail to the legal owner, registered owner, and Department of Motor Vehicles of intent to do so. On the sale date, the vehicle shall be sold to the highest cash bidder and the proceeds of sale must be used first to satisfy the lien plus storage costs and costs incident to the sale. The balance shall be forwarded to the legal owner, or if none, to the registered owner, or if the address is unknown, it shall be forwarded to the Department of Motor Vehicles.

The said expenses for sale shall also include a reasonable attorney's fee, which may be necessarily incurred. If any of such charged remains unpaid for thirty (30) days after such request for payment, the repair facility may also refer such charge to its attorneys for collection and the customer will pay a reasonable attorney's fee.

Other

Where applicable the Original Equipment Manufacturer or Dealer is responsible for the programming of engine remote throttle operation and over speed protection not to exceed 1500 RPM.


Spartan Truck Co. reserves the right to make engineering changes to its products without obligation to perform these changes to products sold or shipped.

All pricing is in US dollars, and is subject to change without notice.

All Purchase Orders are subject to acceptance by Spartan Truck Company.

FOR ALL INQUIRIES

**PLEASE CONTACT YOUR SPARTAN REPRESENTATIVE AT
(818) 899-1111 OR FAX YOUR INQUIRIES TO (818) 897-4366.**

Valley Peterbilt, Inc. (Interstate Truck Center, LLC) 5837 N Golden State Blvd. Turlock, CA 95382 209-669-5444						Date	11/10/2021		SS# / TIN	
						Customer	City of Merced - Public Works Administration			
				Address	1776 Grogan Ave					
				City, State	Zip	County	Tax Rate			
Stock Number		Mileage		Merced, CA	95341	Merced	8.250%			
Driver's License Number		State								
License Plate Number		Sticker-Month/Year								
Make	Model	Year	New/Used	Serial #	Axles		Sales Price			
Peterbilt	548	2023	New	TBD	3		\$115,284.00			
Spartan	SRO60SC	2022	New	TBD	NA		\$47,911.50			
							\$0.00			
Truck Specs				Purchase Information						
Make	Peterbilt			Sales Price	\$163,195.50					
Model	548			Federal Exise Tax	Exempt					
Year	2023			CA Tire Tax (\$1.75 per New Tire)	10	\$17.50				
Engine	Paccar PX9 330hp			Net Sale Price	\$163,213.00					
Transmission	Allison 3500 RDS			CA Sales Tax	\$13,463.63					
Wheelbase	192" CA (per body builder)			License & Doc.	Exempt					
Interior	Grey			Delivery Fees	\$0.00					
Exterior Color	White			Extended Warranties	\$0.00					
Sleeper	N/A			Forward Balance	\$176,676.63					
Ext. Warranties	CARB 5 year / 150k mile Emissions Warranty			Non-Refundable Down Payment	0%	\$0.00				
				Cash Down Payment	0%	\$0.00				
Add-Ons (After Market)	None Quoted			Grant Funding	0%	\$0.00				
				Total Down Payment	\$0.00					
Source of Payment:				Unpaid Balance	\$176,676.63					
				Accepted By: (Management) Valley Peterbilt, Inc.				Purchaser:		
Order Taken By:				X						

This order is subject to the acceptance of the Sales Manager or Dealer Principal prior to being finalized. Purchaser's deposit will be returned if not accepted.

Once order is signed and accepted, contract will be binding for 30 days to hold vehicles or place factory order, after which time trucks will return to inventory and new terms may be discussed.

Returned deposits will be paid in full, less any expenses accrued due to customer requests.

If vehicle(s) is used the vehicle(s) is sold "as is" with no warranty expressed or implied.