

CITY OF MERCED
DEPARTMENT OF ENGINEERING
CALIFORNIA

NOTICE INVITING BIDS
BID FORMS
SAMPLE CONTRACT DOCUMENTS
SPECIAL PROVISIONS
FOR

PROJECT NUMBER CP220024

R STREET SIDEWALK REPLACEMENT CHILDS TO 13TH STREET

Matthew Serratto - Mayor

Bertha A. Perez – Mayor Pro-Tempore

Sarah Boyle – Council Member

Ronnie De Anda – Council Member

Jesse F. Ornelas – Council Member

Shane Smith– Council Member

Fue Xiong– Council Member

Scott McBride – City Manager

Craig Cornwell – City Attorney

Michael A. Wegley, PE – Interim City Engineer

PREBID MEETING: 2/12/2024 at 10:30 AM

BID OPENING: 2/29/2024 at 2:00 PM

TABLE OF CONTENTS

ITEM	PAGE NO.
CONSTRUCTION CONTRACT	1
SIGNATURE PAGE FOR CONSTRUCTION CONTRACT	22
EXHIBIT "A" - SERVICES / SCHEDULE	23
EXHIBIT "B" - DRAWINGS AND TECHNICAL SPECIFICATIONS.....	25
SCOPE OF WORK.....	25
PERFORMANCE	25
COORDINATION/COOPERATION.....	25
INSPECTION OF SITE	25
DUST CONTROL	25
PERMITS, BONDS, LICENSES AND INSURANCE	25
PUBLIC CONVENIENCE AND SAFETY	26
WATER POLLUTION CONTROL	29
STREET SWEEPING.....	45
PORTABLE CHANGEABLE MESSAGE SIGNS	46
PROJECT FUNDING SIGNS	48
AS-BUILT DRAWINGS	48
SAWCUT EXISTING CONCRETE AND ASPHALT PAVEMENT.....	48
CLEARING AND GRUBBING	49
REMOVE ASPHALT CONCRETE	49
REMOVE CONCRETE.....	49
REMOVE CONCRETE CURB AND GUTTER.....	50
REMOVE TREE	50
ASPHALT CONCRETE.....	51
TACK COAT APPLICATION.....	52
AGGREGATE BASE	52
CONCRETE CURB AND GUTTER.....	53
CONCRETE SIDEWALK.....	53
PAINT RED CURB	54
RESTORATION	55
PLANS.....	55
EXHIBIT "C" – SPECIAL CONDITIONS.....	61
ARTICLE 1 BONDS	61

EXHIBIT "D" – CERTIFICATION LABOR CODE SECTION 1861	62
EXHIBIT "E" – PUBLIC WORKS CONTRACTOR REGISTRATION CERTIFICATION.....	63
EXHIBIT "F" – PAYMENT AND PERFORMANCE BONDS.....	64
PERFORMANCE BOND.....	65
PAYMENT BOND.....	69
APPENDIX.....	72
CITY OF MERCED STANDARD DESIGNS	73
STATE GENERAL PREVAILING WAGE RATES.....	74
LOCATION MAP.....	75
PUCHASING DEPARTMENT DRIVING DIRECTIONS.....	76
REGULATION VIII – FUGITIVE PM10 PROHIBITIONS.....	77

CONSTRUCTION CONTRACT

R STREET SIDEWALK REPLACEMENT CHILDS TO 13TH STREET – PROJECT NO. CP220024

1. Parties and Date.

This Contract is made and entered into this 10th day of June, 2024 by and between the City of Merced, a public agency of the State of California ("City") and **Tosted Asphalt, Inc.**, a **California Corporation** with its principal place of business at **4891 East Annadale Avenue Fresno California 93725** ("Contractor"). City and Contractor are sometimes individually referred to as "Party" and collectively as "Parties" in this Contract.

2. Recitals.

2.1 City. City is a public agency organized under the laws of the State of California, with power to contract for services necessary to achieve its purpose.

2.2 Contractor. Contractor desires to perform and assume responsibility for the provision of certain construction services required by the City on the terms and conditions set forth in this Contract. Contractor represents that it is duly licensed and experienced in providing services such as construction of remove of existing sidewalk (6949 SF), curb & gutter (90 LF), asphalt concrete (180 SF), (1) 30" tree, contractor to install new sidewalk (7145 SF), new curb and gutter (90 LF), paint new curb red (65 LF) and new asphalt concrete (180 SF). The following license classifications are required for this Project: **CLASS A or C-8**

2.3 Project. City desires to engage Contractor to render such services for the **R STREET SIDEWALK REPLACEMENT CHILDS TO 13TH STREET – Project No. CP220024** as set forth in this Contract.

2.4 Project Documents & Certifications. Contractor has obtained, and delivers concurrently herewith, a performance bond, a payment bond, and all insurance documentation, as required by the Contract.

3. Terms

3.1 Incorporation of Documents. This Contract includes and hereby incorporates in full by reference the following documents, including all exhibits, drawings, specifications and documents therein, and attachments and addenda thereto:

- Services/Schedule (Exhibit "A")
- Plans and Specifications (Exhibit "B")
- Special Conditions (Exhibit "C")
- Contractor's Certificate Regarding Workers' Compensation (Exhibit "D")
- Public Works Contractor Registration Certification (Exhibit "E")

- Payment and Performance Bonds (Exhibit "F")
- Addenda
- Change Orders executed by the City
- Latest Edition of the Standard Specifications for Public Works Construction (Green Book), Excluding Sections 1-9
- Notice Inviting Bids, if any
- Instructions to Bidders, if any
- Contractor's Bid

3.2 Contractor's Basic Obligation; Scope of Work. Contractor promises and agrees, at its own cost and expense, to furnish to the City all labor, materials, tools, equipment, services, and incidental and customary work necessary to fully and adequately complete the Project, including all structures and facilities necessary for the Project or described in the Contract (hereinafter sometimes referred to as the "Work"), for a Total Contract Price as specified pursuant to this Contract. All Work shall be subject to, and performed in accordance with the above referenced documents, as well as the exhibits attached hereto and incorporated herein by reference. The plans and specifications for the Work are further described in Exhibit "B" attached hereto and incorporated herein by this reference. Special Conditions, if any, relating to the Work are described in Exhibit "C" attached hereto and incorporated herein by this reference.

3.2.1 Change in Scope of Work. Any change in the scope of the Work, method of performance, nature of materials or price thereof, or any other matter materially affecting the performance or nature of the Work shall not be paid for or accepted unless such change, addition or deletion is approved in writing by a valid change order executed by the City. Should Contractor request a change order due to unforeseen circumstances affecting the performance of the Work, such request shall be made within five (5) business days of the date such circumstances are discovered or shall waive its right to request a change order due to such circumstances. If the Parties cannot agree on any change in price required by such change in the Work, the City may direct the Contractor to proceed with the performance of the change on a time and materials basis.

3.2.2 Substitutions/"Or Equal". Pursuant to Public Contract Code Section 3400(b), the City may make a finding that designates certain products, things, or services by specific brand or trade name. Unless specifically designated in this Contract, whenever any material, process, or article is indicated or specified by grade, patent, or proprietary name or by name of manufacturer, such Specifications shall be deemed to be used for the purpose of facilitating the description of the material, process or article desired and shall be deemed to be followed by the words "or equal."

Contractor may, unless otherwise stated, offer for substitution any material, process or article which shall be substantially equal or better in every respect to that so indicated or specified in this Contract. However, the City may have adopted certain uniform standards for certain materials, processes and articles. Contractor shall submit requests, together with substantiating data, for substitution of any "or equal" material, process, or article no later than thirty-five (35) days after award of the Contract. To facilitate the construction schedule and sequencing, some requests may need to be submitted before thirty-five (35) days after award of Contract. Provisions regarding submission of "or equal" requests shall not in any way authorize an extension of time for performance of this Contract. If a proposed "or equal" substitution request is rejected, Contractor shall be responsible for providing the specified material, process, or article. The burden of proof as to the equality of any material, process or article shall rest with Contractor.

The City has the complete and sole discretion to determine if a material, process or article is an "or equal" material, process or article that may be substituted. Data required to substantiate requests for substitutions of an "or equal" material, process or article data shall include a signed affidavit from Contractor stating that, and describing how, the substituted "or equal" material, process or article is equivalent to that specified in every way except as listed on the affidavit. Substantiating data shall include any and all illustrations, specifications, and other relevant data including catalog information which describes the requested substituted "or equal" material, process or article, and substantiates that it is an "or equal" to the material, process or article. The substantiating data must also include information regarding the durability and lifecycle cost of the requested substituted "or equal" material, process or article. Failure to submit all the required substantiating data, including the signed affidavit, to the City in a timely fashion will result in the rejection of the proposed substitution.

Contractor shall bear all of the City's costs associated with the review of substitution requests. Contractor shall be responsible for all costs related to a substituted "or equal" material, process or article. Contractor is directed to the Special Conditions (if any) to review any findings made pursuant to Public Contract Code section 3400.

3.3 Period of Performance and Liquidated Damages. Contractor shall perform and complete all Work under this Contract within **90 working days**, beginning the effective date of the Notice to Proceed ("Contract Time"). Contractor shall perform its Work in strict accordance with any completion schedule, construction schedule or project milestones developed by the City. Such schedules or milestones may be included as part of Exhibits "A" or "B" attached hereto or may be provided separately in writing to Contractor. Contractor agrees that if such Work is not completed within the aforementioned Contract Time and/or pursuant to any such completion schedule, construction schedule or project milestones developed pursuant to provisions of the Contract, it is understood, acknowledged and agreed that the City will suffer damage. Pursuant to Government Code Section 53069.85, Contractor shall pay to the City as fixed and liquidated damages the sum of **\$2800.00 per day** for each and every calendar day of delay beyond the Contract Time or beyond any completion schedule, construction schedule or Project milestones established pursuant to the Contract.

3.4 Standard of Performance; Performance of Employees. Contractor shall perform all Work under this Contract in a skillful and workmanlike manner, and consistent with the standards generally recognized as being employed by professionals in the same discipline in the State of California. Contractor represents and maintains that it is skilled in the professional calling necessary to perform the Work. Contractor warrants that all employees and subcontractors shall have sufficient skill and experience to perform the Work assigned to them. Finally, Contractor represents that it, its employees, and subcontractors have all licenses, permits, qualifications and approvals of whatever nature that are legally required to perform the Work, including any required business license, and that such licenses and approvals shall be maintained throughout the term of this Contract. As provided for in the indemnification provisions of this Contract, Contractor shall perform, at its own cost and expense and without reimbursement from the City, any work necessary to correct errors or omissions which are caused by Contractor's failure to comply with the standard of care provided for herein. Any employee who is determined by the City to be uncooperative, incompetent, a threat to the safety of persons or the Work, or any employee who fails or refuses to perform the Work in a manner acceptable to the City, shall be promptly removed from the Project by Contractor and shall not be re-employed on the Work.

3.5 Control and Payment of Subordinates; Contractual Relationship. City retains Contractor on an independent contractor basis and Contractor is not an employee of City. Any additional personnel performing the work governed by this Contract on behalf of Contractor shall at all times be under Contractor's exclusive direction and control. Contractor shall pay all wages, salaries, and other amounts due such personnel in connection with their performance under this Contract and as required by law. Contractor shall be responsible for all reports and obligations respecting such additional personnel, including, but not limited to: social security taxes, income tax withholding, unemployment insurance, and workers' compensation insurance.

3.6 City's Basic Obligation. City agrees to engage and does hereby engage Contractor as an independent contractor to furnish all materials and to perform all Work according to the terms and conditions herein contained for the sum set forth above. Except as otherwise provided in the Contract, the City shall pay to Contractor, as full consideration for the satisfactory performance by Contractor of the services and obligations required by this Contract, the below-referenced compensation in accordance with compensation provisions set forth in the Contract.

3.7 Compensation and Payment.

3.7.1 Amount of Compensation. As consideration for performance of the Work required herein, City agrees to pay Contractor the Total Contract Price of **One Hundred Seventy-Nine Thousand Five Hundred Forty-Three Dollars and Three Cents (\$179,543.03)** ("Total Contract Price") provided that such amount shall be subject to adjustment pursuant to the applicable terms of this Contract or written change orders approved and signed in advance by the City.

3.7.2 Payment of Compensation. If the Work is scheduled for completion in thirty (30) or less calendar days, City will arrange for payment of the Total Contract Price upon completion and approval by City of the Work. If the Work is scheduled for completion in more than thirty (30) calendar days, City will pay Contractor on a monthly basis as provided for herein. On or before the fifth (5th) day of each month, Contractor shall submit to the City an itemized application for payment in the format supplied by the City indicating the amount of Work completed since commencement of the Work or since the last progress payment. These applications shall be supported by evidence which is required by this Contract and such other documentation as the City may require. The Contractor shall certify that the Work for which payment is requested has been done and that the materials listed are stored where indicated. Contractor may be required to furnish a detailed schedule of values upon request of the City and in such detail and form as the City shall request, showing the quantities, unit prices, overhead, profit, and all other expenses involved in order to provide a basis for determining the amount of progress payments.

3.7.3 Prompt Payment. City shall review and pay all progress payment requests in accordance with the provisions set forth in Section 20104.50 of the California Public Contract Code. However, no progress payments will be made for Work not completed in accordance with this Contract. Contractor shall comply with all applicable laws, rules and regulations relating to the proper payment of its employees, subcontractors, suppliers, or others.

3.7.4 Contract Retentions. From each approved progress estimate, five percent (5%) will be deducted and retained by the City, and the remainder will be paid to Contractor. All Contract retention shall be released and paid to Contractor and subcontractors pursuant to California Public Contract Code Section 7107.

3.7.5 Other Retentions. In addition to Contract retentions, the City may deduct from each progress payment an amount necessary to protect City from loss because of: (1)

liquidated damages which have accrued as of the date of the application for payment; (2) any sums expended by the City in performing any of Contractor's obligations under the Contract which Contractor has failed to perform or has performed inadequately; (3) defective Work not remedied; (4) stop notices as allowed by state law; (5) reasonable doubt that the Work can be completed for the unpaid balance of the Total Contract Price or within the scheduled completion date; (6) unsatisfactory prosecution of the Work by Contractor; (7) unauthorized deviations from the Contract; (8) failure of Contractor to maintain or submit on a timely basis proper and sufficient documentation as required by the Contract or by City during the prosecution of the Work; (9) erroneous or false estimates by Contractor of the value of the Work performed; (10) any sums representing expenses, losses, or damages as determined by the City, incurred by the City for which Contractor is liable under the Contract; and (11) any other sums which the City is entitled to recover from Contractor under the terms of the Contract or pursuant to state law, including Section 1727 of the California Labor Code. The failure by the City to deduct any of these sums from a progress payment shall not constitute a waiver of the City's right to such sums.

3.7.6 Substitutions for Contract Retentions. In accordance with California Public Contract Code Section 22300, the City will permit the substitution of securities for any monies withheld by the City to ensure performance under the Contract. At the request and expense of Contractor, securities equivalent to the amount withheld shall be deposited with the City, or with a state or federally chartered bank in California as the escrow agent, and thereafter the City shall then pay such monies to Contractor as they come due. Upon satisfactory completion of the Contract, the securities shall be returned to Contractor. For purposes of this Section and Section 22300 of the Public Contract Code, the term "satisfactory completion of the contract" shall mean the time the City has issued written final acceptance of the Work and filed a Notice of Completion as required by law and provisions of this Contract. Contractor shall be the beneficial owner of any securities substituted for monies withheld and shall receive any interest thereon. The escrow agreement used for the purposes of this Section shall be in the form provided by the City.

3.7.7 Title to Work. As security for partial, progress, or other payments, title to Work for which such payments are made shall pass to the City at the time of payment. To the extent that title has not previously been vested in the City by reason of payments, full title shall pass to the City at delivery of the Work at the destination and time specified in this Contract. Such transferred title shall in each case be good, free and clear from any and all security interests, liens, or other encumbrances. Contractor promises and agrees that it will not pledge, hypothecate, or otherwise encumber the items in any manner that would result in any lien, security interest, charge, or claim upon or against said items. Such transfer of title shall not imply acceptance by the City, nor relieve Contractor from the responsibility to strictly comply with the Contract and shall not relieve Contractor of responsibility for any loss of or damage to items.

3.7.8 Labor and Material Releases. Contractor shall furnish City with labor and material releases from all subcontractors performing work on, or furnishing materials for, the Work governed by this Contract prior to final payment by City.

3.7.9 Prevailing Wages. Contractor is aware of the requirements of California Labor Code Section 1720 et seq., and 1770 et seq., as well as California Code of Regulations, Title 8, Section 16000 et seq., ("Prevailing Wage Laws"), which require the payment of prevailing wage rates and the performance of other requirements on "public works" and "maintenance" projects. Since the Services are being performed as part of an applicable "public works" or "maintenance" project, as defined by the Prevailing Wage Laws, and since the total compensation is \$1,000 or more, Contractor agrees to fully comply with such Prevailing Wage Laws. City shall provide Contractor with a copy of the prevailing rates of per diem wages in effect at the commencement of

this Contract upon request. Contractor shall make copies of the prevailing rates of per diem wages for each craft, classification or type of worker needed to execute the Services available to interested parties upon request and shall post copies at Contractor's principal place of business and at the project site. Contractor shall defend, indemnify and hold the City, its officials, officers, employees and agents free and harmless from any claim or liability arising out of any failure or alleged failure to comply with the Prevailing Wage Laws. Contractor and any subcontractor shall forfeit a penalty of up to \$200 per calendar day or portion thereof for each worker paid less than the prevailing wage rates.

3.7.10 Apprenticeable Crafts. When Contractor employs workmen in an apprenticeable craft or trade, Contractor shall comply with the provisions of Section 1777.5 of the California Labor Code with respect to the employment of properly registered apprentices upon public works. The primary responsibility for compliance with said section for all apprenticeable occupations shall be with Contractor. The Contractor or any subcontractor that is determined by the Labor Commissioner to have knowingly violated Section 1777.5 shall forfeit as a civil penalty an amount not exceeding \$100 for each full calendar day of noncompliance, or such greater amount as provided by law.

3.7.11 Hours of Work. Contractor is advised that eight (8) hours labor constitutes a legal day's work. Pursuant to Section 1813 of the California Labor Code, Contractor shall forfeit a penalty of \$25.00 per worker for each day that each worker is permitted to work more than eight (8) hours in any one calendar day and forty (40) hours in any one calendar week, except when payment for overtime is made at not less than one and one-half (1-1/2) times the basic rate for that worker.

3.7.12 Payroll Records. Contractor and each subcontractor shall keep an accurate payroll record, showing the name, address, social security number, work classification, straight time and overtime hours worked each day and week, and the actual per diem wages paid to each journeyman, apprentice, worker, or other employee employed by him or her in connection with the public work. The payroll records shall be certified and shall be available for inspection at all reasonable hours at the principal office of Contractor in the manner provided in Labor Code section 1776. In the event of noncompliance with the requirements of this section, Contractor shall have 10 days in which to comply subsequent to receipt of written notice specifying in what respects such Contractor must comply with this section. Should noncompliance still be evident after such 10-day period, Contractor shall, as a penalty to City, forfeit not more than \$100.00 for each calendar day or portion thereof, for each worker, until strict compliance is effectuated. The amount of the forfeiture is to be determined by the Labor Commissioner. A contractor who is found to have violated the provisions of law regarding wages on Public Works with the intent to defraud shall be ineligible to bid on Public Works contracts for a period of one to three years as determined by the Labor Commissioner. Upon the request of the Division of Apprenticeship Standards or the Division of Labor Standards Enforcement, such penalties shall be withheld from progress payments then due. The responsibility for compliance with this section is on Contractor. The requirement to submit certified payroll records directly to the Labor Commissioner under Labor Code section 1771.4 shall not apply to work performed on a public works project that is exempt pursuant to the small project exemption specified in Labor Code Section 1771.4.

3.7.13 Contractor and Subcontractor Registration. Pursuant to Labor Code sections 1725.5 and 1771.1, all contractors and subcontractors that wish to bid on, be listed in a bid proposal, or enter into a contract to perform public work must be registered with the Department of Industrial Relations. No bid will be accepted nor any contract entered into without proof of the contractor's and subcontractors' current registration with the Department of Industrial Relations to perform public work. Contractor is directed to review, fill out and execute the Public Works Contractor Registration Certification attached hereto as Exhibit "E" prior to contract execution. Notwithstanding the foregoing, the contractor registration requirements mandated by Labor Code Sections 1725.5 and 1771.1 shall not apply to work performed on a public works project that is exempt pursuant to the small project exemption specified in Labor Code Sections 1725.5 and 1771.1.

3.7.14 Labor Compliance; Stop Orders. This Project is subject to compliance monitoring and enforcement by the Department of Industrial Relations. It shall be the Contractor's sole responsibility to evaluate and pay the cost of complying with all labor compliance requirements under this Contract and applicable law. Any stop orders issued by the Department of Industrial Relations against Contractor or any subcontractor that affect Contractor's performance of Work, including any delay, shall be Contractor's sole responsibility. Any delay arising out of or resulting from such stop orders shall be considered Contractor caused delay subject to any applicable liquidated damages and shall not be compensable by the City. Contractor shall defend, indemnify and hold the City, its officials, officers, employees and agents free and harmless from any claim or liability arising out of stop orders issued by the Department of Industrial Relations against Contractor or any subcontractor.

3.8 Performance of Work; Jobsite Obligations.

3.8.1 Water Quality Management and Compliance.

3.8.1.1 Water Quality Management and Compliance. Contractor shall keep itself and all subcontractors, staff, and employees fully informed of and in compliance with all local, state and federal laws, rules and regulations that may impact, or be implicated by the performance of the Work including, without limitation, all applicable provisions of the Federal Water Pollution Control Act (33 U.S.C. §§ 1300); the California Porter-Cologne Water Quality Control Act (Cal Water Code §§ 13000-14950); local ordinances regulating discharges of storm water; and any and all regulations, policies, or permits issued pursuant to any such authority regulating the discharge of pollutants, as that term is used in the Porter-Cologne Water Quality Control Act, to any ground or surface water in the State.

3.8.1.2 Compliance with the Statewide Construction General Permit. Contractor shall comply with all conditions of the most recent iteration of the National Pollutant Discharge Elimination System General Permit for Storm Water Discharges Associated with Construction Activity, issued by the California State Water Resources Control Board ("Permit"). It shall be Contractor's sole responsibility to file a Notice of Intent and procure coverage under the Permit for all construction activity which results in the disturbance of more than one acre of total land area or which is part of a larger common area of development or sale. Prior to initiating work, Contractor shall be solely responsible for preparing and implementing a Storm Water Pollution Prevention Plan (SWPPP) as required by the Permit. Contractor shall be responsible for procuring, implementing and complying with the provisions of the Permit and the SWPPP, including the standard provisions, and monitoring and reporting requirements as required by the Permit. The Permit requires the SWPPP to be a "living document" that changes as necessary to meet the conditions and requirements of the job site as it progresses through

difference phases of construction and is subject to different weather conditions. It shall be Contractor's sole responsibility to update the SWPPP as necessary to address conditions at the project site.

3.8.1.3 Other Water Quality Rules Regulations and Policies. Contractor shall comply with the lawful requirements of any applicable municipality, drainage City, or local agency regarding discharges of storm water to separate storm drain systems or other watercourses under their jurisdiction, including applicable requirements in municipal storm water management programs.

3.8.1.4 Cost of Compliance. Storm, surface, nuisance, or other waters may be encountered at various times during construction of The Work. Therefore, the Contractor, by submitting a Bid, hereby acknowledges that it has investigated the risk arising from such waters, has prepared its Bid accordingly, and assumes any and all risks and liabilities arising therefrom.

3.8.1.5 Liability for Non-Compliance. Failure to comply with the Permit is a violation of federal and state law. Pursuant to the indemnification provisions of this Contract, Contractor hereby agrees to defend, indemnify and hold harmless the City and its officials, officers, employees, volunteers and agents for any alleged violations. In addition, City may seek damages from Contractor for any delay in completing the Work in accordance with the Contract, if such delay is caused by or related to Contractor's failure to comply with the Permit.

3.8.1.6 Reservation of Right to Defend. City reserves the right to defend any enforcement action brought against the City for Contractor's failure to comply with the Permit or any other relevant water quality law, regulation, or policy. Pursuant to the indemnification provisions of this Contract, Contractor hereby agrees to be bound by, and to reimburse the City for the costs (including the City's attorney's fees) associated with, any settlement reached between the City and the relevant enforcement entity.

3.8.1.7 Training. In addition to the standard of performance requirements set forth in paragraph 3.4, Contractor warrants that all employees and subcontractors shall have sufficient skill and experience to perform the Work assigned to them without impacting water quality in violation of the laws, regulations and policies described in paragraph 3.8.1. Contractor further warrants that it, its employees and subcontractors will receive adequate training, as determined by City, regarding the requirements of the laws, regulations and policies described in paragraph 3.8.1 as they may relate to the Work provided under this Agreement. Upon request, City will provide the Contractor with a list of training programs that meet the requirements of this paragraph.

3.8.2 Safety. Contractor shall execute and maintain its work so as to avoid injury or damage to any person or property. Contractor shall comply with the requirements of the specifications relating to safety measures applicable in particular operations or kinds of work. In carrying out its Work, Contractor shall at all times be in compliance with all applicable local, state and federal laws, rules and regulations, and shall exercise all necessary precautions for the safety of employees appropriate to the nature of the Work and the conditions under which the Work is to be performed. Safety precautions as applicable shall include, but shall not be limited to, adequate life protection and lifesaving equipment; adequate illumination for underground and night operations; instructions in accident prevention for all employees, such as machinery guards, safe walkways, scaffolds, ladders, bridges, gang planks, confined space procedures, trenching and shoring, fall protection and other safety devices, equipment and wearing apparel as are necessary

or lawfully required to prevent accidents or injuries; and adequate facilities for the proper inspection and maintenance of all safety measures. Furthermore, Contractor shall prominently display the names and telephone numbers of at least two medical doctors practicing in the vicinity of the Project, as well as the telephone number of the local ambulance service, adjacent to all telephones at the Project site.

3.8.3 Laws and Regulations. Contractor shall keep itself fully informed of and in compliance with all local, state and federal laws, rules and regulations in any manner affecting the performance of the Contract or the Work, including all Cal/OSHA requirements, and shall give all notices required by law. Contractor shall be liable for all violations of such laws and regulations in connection with Work. If Contractor observes that the drawings or specifications are at variance with any law, rule or regulation, it shall promptly notify the City in writing. Any necessary changes shall be made by written change order. If Contractor performs any work knowing it to be contrary to such laws, rules and regulations and without giving written notice to the City, Contractor shall be solely responsible for all costs arising therefrom. City is a public entity of the State of California subject to certain provisions of the Health & Safety Code, Government Code, Public Contract Code, and Labor Code of the State. It is stipulated and agreed that all provisions of the law applicable to the public contracts of a municipality are a part of this Contract to the same extent as though set forth herein and will be complied with. Contractor shall defend, indemnify and hold City, its officials, officers, employees and agents free and harmless, pursuant to the indemnification provisions of this Contract, from any claim or liability arising out of any failure or alleged failure to comply with such laws, rules or regulations.

3.8.4 Permits and Licenses. Contractor shall be responsible for securing City permits and licenses necessary to perform the Work described herein, including, but not limited to, any required business license. While Contractor will not be charged a fee for any City permits, Contractor shall pay the City's business license fee, if any. Any ineligible contractor or subcontractor pursuant to Labor Code Sections 1777.1 and 1777.7 may not perform work on this Project.

3.8.5 Trenching Work. If the Total Contract Price exceeds \$25,000 and if the Work governed by this Contract entails excavation of any trench or trenches five (5) feet or more in depth, Contractor shall comply with all applicable provisions of the California Labor Code, including Section 6705. To this end, Contractor shall submit for City's review and approval a detailed plan showing the design of shoring, bracing, sloping, or other provisions to be made for worker protection from the hazard of caving ground during the excavation of such trench or trenches. If such plan varies from the shoring system standards, the plan shall be prepared by a registered civil or structural engineer.

3.8.6 Hazardous Materials and Differing Conditions. As required by California Public Contract Code Section 7104, if this Contract involves digging trenches or other excavations that extend deeper than four (4) feet below the surface, Contractor shall promptly, and prior to disturbance of any conditions, notify City of: (1) any material discovered in excavation that Contractor believes to be a hazardous waste that is required to be removed to a Class I, Class II or Class III disposal site; (2) subsurface or latent physical conditions at the site differing from those indicated by City; and (3) unknown physical conditions of an unusual nature at the site, significantly different from those ordinarily encountered in such contract work. Upon notification, City shall promptly investigate the conditions to determine whether a change order is appropriate. In the event of a dispute, Contractor shall not be excused from any scheduled completion date and shall proceed with all Work to be performed under the Contract, but shall retain all rights provided by the Contract or by law for making protests and resolving the dispute.

3.8.7 Underground Utility Facilities. To the extent required by Section 4215 of the California Government Code, City shall compensate Contractor for the costs of: (1) locating and repairing damage to underground utility facilities not caused by the failure of Contractor to exercise reasonable care; (2) removing or relocating underground utility facilities not indicated in the construction drawings; and (3) equipment necessarily idled during such work. Contractor shall not be assessed liquidated damages for delay caused by failure of City to provide for removal or relocation of such utility facilities.

3.8.8 Air Quality. Contractor must fully comply with all applicable laws, rules and regulations in furnishing or using equipment and/or providing services, including, but not limited to, emissions limits and permitting requirements imposed by the California Air Resources Board (CARB). Although CARB limits and requirements are more broad, Contractor shall specifically be aware of their application to "portable equipment", which definition is considered by CARB to include any item of equipment with a fuel-powered engine. Contractor shall indemnify City against any fines or penalties imposed by CARB, or any other governmental or regulatory agency for violations of applicable laws, rules and/or regulations by Contractor, its subcontractors, or others for whom Contractor is responsible under its indemnity obligations provided for in this Agreement.

3.8.9 State Recycling Mandates. Contractor shall comply with State Recycling Mandates. Any recyclable materials/debris collected by the contractor that can be feasibly diverted via reuse or recycling must be hauled by the appropriate handler for reuse or recycling.

3.9 Completion of Work. When Contractor determines that it has completed the Work required herein, Contractor shall so notify City in writing and shall furnish all labor and material releases required by this Contract. City shall thereupon inspect the Work. If the Work is not acceptable to the City, the City shall indicate to Contractor in writing the specific portions or items of Work which are unsatisfactory or incomplete. Once Contractor determines that it has completed the incomplete or unsatisfactory Work, Contractor may request a reinspection by the City. Once the Work is acceptable to City, City shall pay to Contractor the Total Contract Price remaining to be paid, less any amount which City may be authorized or directed by law to retain. Payment of retention proceeds due to Contractor shall be made in accordance with Section 7107 of the California Public Contract Code.

3.10 Claims; Government Code Claim Compliance.

3.10.1 Intent. Effective January 1, 1991, Section 20104 et seq., of the California Public Contract Code prescribes a process utilizing informal conferences, non-binding judicial supervised mediation, and judicial arbitration to resolve disputes on construction claims of \$375,000 or less. Effective January 1, 2017, Section 9204 of the Public Contract Code prescribes a process for negotiation and mediation to resolve disputes on construction claims. The intent of this Section is to implement Sections 20104 et seq. and Section 9204 of the California Public Contract Code. This Section shall be construed to be consistent with said statutes.

3.10.2 Claims. For purposes of this Section, "Claim" means a separate demand by the Contractor, after a change order duly requested in accordance with the terms of this Contract has been denied by the City, for (A) a time extension, (B) payment of money or damages arising from Work done by or on behalf of the Contractor pursuant to the Contract, or (C) an amount the payment of which is disputed by the City. Claims governed by this Section may not be filed unless and until the Contractor completes all procedures for giving notice of delay or change and for the requesting of a time extension or change order, including but not necessarily limited to the change order procedures contained herein, and Contractor's request for a change has been denied in whole

or in part. Claims governed by this Section must be filed no later than fourteen (14) days after a request for change has been denied in whole or in part or after any other event giving rise to the Claim. The Claim shall be submitted in writing to the City and shall include on its first page the following in 16 point capital font: "THIS IS A CLAIM." Furthermore, the claim shall include the documents necessary to substantiate the claim. Nothing in this Section is intended to extend the time limit or supersede notice requirements otherwise provided by contract for the filing of claims, including all requirements pertaining to compensation or payment for extra Work, disputed Work, and/or changed conditions. Failure to follow such contractual requirements shall bar any claims or subsequent lawsuits for compensation or payment thereon.

3.10.3 Supporting Documentation. The Contractor shall submit all claims in the following format:

3.10.3.1 Summary of claim merit and price, reference Contract Document provisions pursuant to which the claim is made

3.10.3.2 List of documents relating to claim:
(A) Specifications
(B) Drawings
(C) Clarifications (Requests for Information)
(D) Schedules
(E) Other

3.10.3.3 Chronology of events and correspondence

3.10.3.4 Analysis of claim merit

3.10.3.5 Analysis of claim cost

3.10.3.6 Time impact analysis in CPM format

3.10.3.7 If Contractor's claim is based in whole or in part on an allegation of errors or omissions in the Drawings or Specifications for the Project, Contractor shall provide a summary of the percentage of the claim subject to design errors or omissions and shall obtain a certificate of merit in support of the claim of design errors and omissions.

3.10.3.8 Cover letter and certification of validity of the claim, including any claims from subcontractors of any tier, in accordance with Government Code section 12650 *et seq.*

3.10.4 City's Response. Upon receipt of a claim pursuant to this Section, City shall conduct a reasonable review of the claim and, within a period not to exceed 45 days, shall provide the Contractor a written statement identifying what portion of the claim is disputed and what portion is undisputed. Any payment due on an undisputed portion of the claim will be processed and made within 60 days after the public entity issues its written statement.

3.10.4.1 If City needs approval from its governing body to provide the Contractor a written statement identifying the disputed portion and the undisputed portion of the

claim, and the governing body does not meet within the 45 days or within the mutually agreed to extension of time following receipt of a claim sent by registered mail or certified mail, return receipt requested, City shall have up to three days following the next duly publicly noticed meeting of the governing body after the 45-day period, or extension, expires to provide the Contractor a written statement identifying the disputed portion and the undisputed portion.

3.10.4.2 Within 30 days of receipt of a claim, City may request in writing additional documentation supporting the claim or relating to defenses or claims City may have against the Contractor. If additional information is thereafter required, it shall be requested and provided pursuant to this subdivision, upon mutual agreement of City and the Contractor.

3.10.4.3 City's written response to the claim, as further documented, shall be submitted to the Contractor within 30 days (if the claim is less than \$50,000, within 15 days) after receipt of the further documentation, or within a period of time no greater than that taken by the Contractor in producing the additional information or requested documentation, whichever is greater.

3.10.5 Meet and Confer. If the Contractor disputes City's written response, or City fails to respond within the time prescribed, the Contractor may so notify City, in writing, either within 15 days of receipt of City's response or within 15 days of City's failure to respond within the time prescribed, respectively, and demand an informal conference to meet and confer for settlement of the issues in dispute. Upon receipt of a demand, City shall schedule a meet and confer conference within 30 days for settlement of the dispute.

3.10.6 Mediation. Within 10 business days following the conclusion of the meet and confer conference, if the claim or any portion of the claim remains in dispute, City shall provide the Contractor a written statement identifying the portion of the claim that remains in dispute and the portion that is undisputed. Any payment due on an undisputed portion of the claim shall be processed and made within 60 days after City issues its written statement. Any disputed portion of the claim, as identified by the Contractor in writing, shall be submitted to nonbinding mediation, with City and the Contractor sharing the associated costs equally. City and Contractor shall mutually agree to a mediator within 10 business days after the disputed portion of the claim has been identified in writing, unless the parties agree to select a mediator at a later time.

3.10.6.1 If the Parties cannot agree upon a mediator, each Party shall select a mediator and those mediators shall select a qualified neutral third party to mediate with regard to the disputed portion of the claim. Each Party shall bear the fees and costs charged by its respective mediator in connection with the selection of the neutral mediator.

3.10.6.2 For purposes of this section, mediation includes any nonbinding process, including, but not limited to, neutral evaluation or a dispute review board, in which an independent third party or board assists the Parties in dispute resolution through negotiation or by issuance of an evaluation. Any mediation utilized shall conform to the timeframes in this section.

3.10.6.3 Unless otherwise agreed to by City and the Contractor in writing, the mediation conducted pursuant to this section shall excuse any further obligation under Section 20104.4 to mediate after litigation has been commenced.

3.10.6.4 The mediation shall be held no earlier than the date the Contractor completes the Work or the date that the Contractor last performs Work, whichever is

earlier. All unresolved claims shall be considered jointly in a single mediation, unless a new unrelated claim arises after mediation is completed.

3.10.7 Procedures After Mediation. If following the mediation, the claim or any portion remains in dispute, the Contractor must file a claim pursuant to Chapter 1 (commencing with Section 900) and Chapter 2 (commencing with Section 910) of Part 3 of Division 3.6 of Title 1 of the Government Code. For purposes of those provisions, the running of the period of time within which a claim must be filed shall be tolled from the time the Contractor submits his or her written claim pursuant to subdivision (a) until the time the claim is denied, including any period of time utilized by the meet and confer conference or mediation.

3.10.8 Civil Actions. The following procedures are established for all civil actions filed to resolve claims subject to this Section:

3.10.8.1 Within 60 days, but no earlier than 30 days, following the filing or responsive pleadings, the court shall submit the matter to non-binding mediation unless waived by mutual stipulation of both parties or unless mediation was held prior to commencement of the action in accordance with Public Contract Code section 9204 and the terms of these procedures. The mediation process shall provide for the selection within 15 days by both parties of a disinterested third person as mediator, shall be commenced within 30 days of the submittal, and shall be concluded within 15 days from the commencement of the mediation unless a time requirement is extended upon a good cause showing to the court.

3.10.8.2 If the matter remains in dispute, the case shall be submitted to judicial arbitration pursuant to Chapter 2.5 (commencing with Section 1141.10) of Title 3 of Part 3 of the Code of Civil Procedure, notwithstanding Section 1114.11 of that code. The Civil Discovery Act of 1986 (Article 3 (commencing with Section 2016) of Chapter 3 of Title 3 of Part 4 of the Code of Civil Procedure) shall apply to any proceeding brought under this subdivision consistent with the rules pertaining to judicial arbitration.

3.10.8.3 In addition to Chapter 2.5 (commencing with Section 1141.10) of Title 3 of Part 3 of the Code of Civil Procedure, (A) arbitrators shall, when possible, be experienced in construction law, and (B) any party appealing an arbitration award who does not obtain a more favorable judgment shall, in addition to payment of costs and fees under that chapter, also pay the attorney's fees on appeal of the other party.

3.10.9 Government Code Claims. In addition to any and all contract requirements pertaining to notices of and requests for compensation or payment for extra work, disputed work, claims and/or changed conditions, Contractor must comply with the claim procedures set forth in Government Code sections 900 et seq. prior to filing any lawsuit against the City. Such Government Code claims and any subsequent lawsuit based upon the Government Code claims shall be limited to those matters that remain unresolved after all procedures pertaining to extra work, disputed work, claims, and/or changed conditions have been followed by Contractor. If no such Government Code claim is submitted, or if any prerequisite contractual requirements are not otherwise satisfied as specified herein, Contractor shall be barred from bringing and maintaining a valid lawsuit against the City. A Government Code claim must be filed no earlier than the date the work is completed or the date the Contractor last performs work on the Project, whichever occurs first. A Government Code claim shall be inclusive of all unresolved claims unless a new unrelated claim arises after the Government Code claim is submitted.

3.10.10 Non-Waiver. City's failure to respond to a claim from the Contractor within the time periods described in this Section or to otherwise meet the time requirements of this Section shall result in the claim being deemed rejected in its entirety. City's failure to respond shall not waive City's rights to any subsequent procedures for the resolution of disputed claims.

3.11 Loss and Damage. Except as may otherwise be limited by law, Contractor shall be responsible for all loss and damage which may arise out of the nature of the Work agreed to herein, or from the action of the elements, or from any unforeseen difficulties which may arise or be encountered in the prosecution of the Work until the same is fully completed and accepted by City.

3.12 Indemnification.

3.12.1 Scope of Indemnity. To the fullest extent permitted by law, Contractor shall defend, indemnify and hold the City, its officials, employees, agents and authorized volunteers free and harmless from any and all claims, demands, causes of action, suits, actions, proceedings, costs, expenses, liability, judgments, awards, decrees, settlements, loss, damage or injury of any kind, in law or equity, to property or persons, including wrongful death, (collectively, "Claims") in any manner arising out of, pertaining to, or incident to any alleged acts, errors or omissions, or willful misconduct of Contractor, its officials, officers, employees, subcontractors, consultants or agents in connection with the performance of the Contractor's services, the Project or this Agreement, including without limitation the payment of all consequential damages, expert witness fees and attorneys' fees and other related costs and expenses. Notwithstanding the foregoing, to the extent required by Civil Code section 2782, Contractor's indemnity obligation shall not apply to liability for damages for death or bodily injury to persons, injury to property, or any other loss, damage or expense arising from the sole or active negligence or willful misconduct of the City or the City's agents, servants, or independent contractors who are directly responsible to the City, or for defects in design furnished by those persons.

3.12.2 Additional Indemnity Obligations. Contractor shall defend, with counsel of City's choosing and at Contractor's own cost, expense and risk, any and all Claims covered by this section that may be brought or instituted against City or its officials, employees, agents and authorized volunteers. In addition, Contractor shall pay and satisfy any judgment, award or decree that may be rendered against City or its officials, employees, agents and authorized volunteers as part of any such claim, suit, action or other proceeding. Contractor shall also reimburse City for the cost of any settlement paid by City or its officials, employees, agents and authorized volunteers as part of any such claim, suit, action or other proceeding. Such reimbursement shall include payment for City's attorney's fees and costs, including expert witness fees. Contractor shall reimburse City and its officials, employees, agents and authorized volunteers, for any and all legal expenses and costs incurred by each of them in connection therewith or in enforcing the indemnity herein provided. Contractor's obligation to indemnify shall not be restricted to insurance proceeds, if any, received by the City, its officials, employees, agents and authorized volunteers.

3.13 Insurance.

3.13.1 Time for Compliance. Contractor shall not commence Work under this Contract until it has provided evidence satisfactory to the City that it has secured all insurance required under this section. In addition, Contractor shall not allow any subcontractor to commence work on any subcontract until it has provided evidence satisfactory to the City that the subcontractor has secured all insurance required under this section. Failure to provide and maintain all required insurance shall be grounds for the City to terminate this Contract for cause.

3.13.2 Minimum Requirements. Contractor shall, at its expense, procure and maintain for the duration of the Contract insurance against claims for injuries to persons or damages to property which may arise from or in connection with the performance of the Work hereunder by Contractor, its agents, representatives, employees or subcontractors. Contractor shall also require all of its subcontractors to procure and maintain the same insurance for the duration of the Contract. Such insurance shall meet at least the following minimum levels of coverage:

3.13.2.1 Minimum Scope of Insurance. Coverage shall be at least as broad as the latest version of the following: (1) *General Liability:* Insurance Services Office Commercial General Liability coverage (occurrence form CG 00 01) OR Insurance Services Office Owners and Contractors Protective Liability Coverage Form (CG 00 09 11 88) (coverage for operations of designated contractor); (2) *Automobile Liability:* Insurance Services Office Business Auto Coverage form number CA 00 01, code 1 (any auto); and (3) *Workers' Compensation and Employer's Liability:* Workers' Compensation insurance as required by the State of California and Employer's Liability Insurance. Policies shall not contain exclusions contrary to this Contract.

3.13.2.2 Minimum Limits of Insurance. Contractor shall maintain limits no less than: (1) *General Liability:* \$5,000,000 per occurrence and \$5,000,000 aggregate for bodily injury, personal injury and property damage; (2) *Automobile Liability:* \$5,000,000 per accident for bodily injury and property damage; and (3) *Workers' Compensation and Employer's Liability:* Workers' compensation limits as required by the Labor Code of the State of California. Employer's Liability limits of \$1,000,000 each accident, policy limit bodily injury or disease, and each employee bodily injury or disease. Defense costs shall be available in addition to the limits. Notwithstanding the minimum limits specified herein, any available coverage shall be provided to the parties required to be named as additional insureds pursuant to this Contract.

3.13.3 Insurance Endorsements. The insurance policies shall contain the following provisions, or Contractor shall provide endorsements (amendments) on forms supplied or approved by the City to add the following provisions to the insurance policies:

3.13.3.1 General Liability. (1) Such policy shall give the City, its officials, employees, agents and authorized volunteers additional insured status using ISO endorsements CG20 10 10 01 plus CG20 37 10 01, or endorsements providing the exact same coverage, with respect to the Work or operations performed by or on behalf of Contractor, including materials, parts or equipment furnished in connection with such work; (2) all policies shall waive or shall permit Contractor to waive all rights of subrogation which may be obtained by the Contractor or any insurer by virtue of payment of any loss or any coverage provided to any person named as an additional insured pursuant to this Contract, and Contractor agrees to waive all such rights of subrogation; and (3) the insurance coverage shall be primary insurance as respects the City, its officials, employees, agents and authorized volunteers, or if excess, shall stand in an unbroken chain of coverage excess of Contractor's scheduled underlying coverage. Any insurance or self-insurance maintained by the City, its officials, employees, agents and authorized volunteers shall be excess of Contractor's insurance and shall not be called upon to contribute with it.

3.13.3.2 Automobile Liability. (1) Such policy shall give the City, its officials, employees, agents and authorized volunteers additional insured status with respect to the ownership, operation, maintenance, use, loading or unloading of any auto owned, leased, hired or borrowed by Contractor or for which Contractor is responsible; (2) all policies shall waive or shall permit Contractor to waive all rights of subrogation which may be obtained by the Contractor or any

insurer by virtue of payment of any loss or any coverage provided to any person named as an additional insured pursuant to this Contract, and Contractor agrees to waive all such rights of subrogation; and (3) the insurance coverage shall be primary insurance as respects the City, its officials, employees, agents and authorized volunteers, or if excess, shall stand in an unbroken chain of coverage excess of Contractor's scheduled underlying coverage. Any insurance or self-insurance maintained by the City, its officials, employees, agents and authorized volunteers shall be excess of Contractor's insurance and shall not be called upon to contribute with it in any way.

3.13.3.3 Workers' Compensation and Employer's Liability Coverage. The insurer shall agree to waive all rights of subrogation against the City, its officials, employees, agents and authorized volunteers for losses paid under the terms of the insurance policy which arise from work performed by Contractor.

3.13.3.4 All Coverages. Each insurance policy required by this Contract shall be endorsed to state that: (1) coverage shall not be suspended, voided, reduced or canceled except after thirty (30) days prior written notice by certified mail, return receipt requested, has been given to the City; and (2) any failure to comply with reporting or other provisions of the policies, including breaches of warranties, shall not affect coverage provided to the City, its officials, employees, agents and authorized volunteers.

3.13.4 Separation of Insureds; No Special Limitations. All insurance required by this Section shall contain standard separation of insureds provisions. In addition, such insurance shall not contain any special limitations on the scope of protection afforded to the City, its officials, employees, agents and authorized volunteers.

3.13.5 Deductibles and Self-Insurance Retentions. Any deductibles or self-insured retentions must be declared to and approved by the City. Contractor shall guarantee that, at the option of the City, either: (1) the insurer shall reduce or eliminate such deductibles or self-insured retentions as respects the City, its officials, employees, agents and authorized volunteers; or (2) the Contractor shall procure a bond or other financial guarantee acceptable to the City guaranteeing payment of losses and related investigation costs, claims and administrative and defense expenses.

3.13.6 Acceptability of Insurers. Insurance is to be placed with insurers with a current A.M. Best's rating no less than A:VII, licensed to do business in California, and satisfactory to the City. Exception may be made for the State Compensation Insurance Fund when not specifically rated.

3.13.7 Verification of Coverage. Contractor shall furnish City with original certificates of insurance and endorsements effecting coverage required by this Contract on forms satisfactory to the City. The certificates and endorsements for each insurance policy shall be signed by a person authorized by that insurer to bind coverage on its behalf, and shall be on forms supplied or approved by the City. All certificates and endorsements must be received and approved by the City before work commences. The City reserves the right to require complete, certified copies of all required insurance policies, at any time.

3.13.8 Subcontractors. All subcontractors shall meet the requirements of this Section before commencing Work. Contractor shall furnish separate certificates and endorsements for each subcontractor. Subcontractor policies of General Liability insurance shall name the City, its officials, employees, agents and authorized volunteers as additional insureds using form ISO 20 38 04 13 or endorsements providing the exact same coverage. All coverages

for subcontractors shall be subject to all of the requirements stated herein except as otherwise agreed to by the City in writing.

3.13.9 Reporting of Claims. Contractor shall report to the City, in addition to Contractor's insurer, any and all insurance claims submitted by Contractor in connection with the Work under this Contract.

3.14 Bond Requirements.

3.14.1 Payment Bond. If required by law or otherwise specifically requested by City in Exhibit "C" attached hereto and incorporated herein by reference, Contractor shall execute and provide to City concurrently with this Contract a Payment Bond in an amount required by the City and in a form provided or approved by the City. If such bond is required, no payment will be made to Contractor until the bond has been received and approved by the City.

3.14.2 Performance Bond. If specifically requested by City in Exhibit "C" attached hereto and incorporated herein by reference, Contractor shall execute and provide to City concurrently with this Contract a Performance Bond in an amount required by the City and in a form provided or approved by the City. If such bond is required, no payment will be made to Contractor until the bond has been received and approved by the City.

3.14.3 Bond Provisions. Should, in City's sole opinion, any bond become insufficient, or any surety be found to be unsatisfactory, Contractor shall renew or replace the effected bond within (ten) 10 days of receiving notice from City. In the event the surety or Contractor intends to reduce or cancel any required bond, at least thirty (30) days prior written notice shall be given to the City, and Contractor shall post acceptable replacement bonds at least ten (10) days prior to expiration of the original bonds. No further payments shall be deemed due or will be made under this Contract until any replacement bonds required by this Section are accepted by the City. To the extent, if any, that the Total Contract Price is increased in accordance with the Contract, Contractor shall, upon request of the City, cause the amount of the bond to be increased accordingly and shall promptly deliver satisfactory evidence of such increase to the City. If Contractor fails to furnish any required bond, the City may terminate the Contract for cause.

3.14.4 Surety Qualifications. Only bonds executed by an admitted surety insurer, as defined in California Code of Civil Procedure Section 995.120, shall be accepted. If a California-admitted surety insurer issuing bonds does not meet these requirements, the insurer will be considered qualified if it is in conformance with Section 995.660 of the California Code of Civil Procedure, and proof of such is provided to the City.

3.15 Warranty. Contractor warrants all Work under the Contract (which for purposes of this Section shall be deemed to include unauthorized work which has not been removed and any non-conforming materials incorporated into the Work) to be of good quality and free from any defective or faulty material and workmanship. Contractor agrees that for a period of one year (or the period of time specified elsewhere in the Contract or in any guarantee or warranty provided by any manufacturer or supplier of equipment or materials incorporated into the Work, whichever is later) after the date of final acceptance, Contractor shall within ten (10) days after being notified in writing by the City of any defect in the Work or non-conformance of the Work to the Contract, commence and prosecute with due diligence all Work necessary to fulfill the terms of the warranty at its sole cost and expense. Contractor shall act sooner as requested by the City in response to an emergency. In addition, Contractor shall, at its sole cost and expense, repair and replace any portions of the Work (or work of other contractors) damaged by its defective Work or which becomes

damaged in the course of repairing or replacing defective Work. For any Work so corrected, Contractor's obligation hereunder to correct defective Work shall be reinstated for an additional one year period, commencing with the date of acceptance of such corrected Work. Contractor shall perform such tests as the City may require to verify that any corrective actions, including, without limitation, redesign, repairs, and replacements comply with the requirements of the Contract. All costs associated with such corrective actions and testing, including the removal, replacement, and reinstatement of equipment and materials necessary to gain access, shall be the sole responsibility of Contractor. All warranties and guarantees of subcontractors, suppliers and manufacturers with respect to any portion of the Work, whether express or implied, are deemed to be obtained by Contractor for the benefit of the City, regardless of whether or not such warranties and guarantees have been transferred or assigned to the City by separate agreement and Contractor agrees to enforce such warranties and guarantees, if necessary, on behalf of the City. In the event that Contractor fails to perform its obligations under this Section, or under any other warranty or guaranty under this Contract, to the reasonable satisfaction of the City, the City shall have the right to correct and replace any defective or non-conforming Work and any work damaged by such work or the replacement or correction thereof at Contractor's sole expense. Contractor shall be obligated to fully reimburse the City for any expenses incurred hereunder upon demand.

3.16 Employee/Labor Certifications.

3.16.1 Contractor's Labor Certification. By its signature hereunder, Contractor certifies that he is aware of the provisions of Section 3700 of the California Labor Code which require every employer to be insured against liability for Worker's Compensation or to undertake self-insurance in accordance with the provisions of that Code, and agrees to comply with such provisions before commencing the performance of the Work. A certification form for this purpose, which is attached to this Contract as Exhibit "D" and incorporated herein by reference, shall be executed simultaneously with this Contract.

3.16.2 Equal Opportunity Employment. Contractor represents that it is an equal opportunity employer and that it shall not discriminate against any employee or applicant for employment because of race, religion, color, national origin, ancestry, sex, age or other interests protected by the State or Federal Constitutions. Such non-discrimination shall include, but not be limited to, all activities related to initial employment, upgrading, demotion, transfer, recruitment or recruitment advertising, layoff or termination.

3.16.3 Verification of Employment Eligibility. By executing this Contract, Contractor verifies that it fully complies with all requirements and restrictions of state and federal law respecting the employment of undocumented aliens, including, but not limited to, the Immigration Reform and Control Act of 1986, as may be amended from time to time, and shall require all subcontractors and sub-subcontractors to comply with the same.

3.17 General Provisions.

3.17.1 City's Representative. The City hereby designates the General Manager, or his or her designee, to act as its representative for the performance of this Contract ("City's Representative"). City's Representative shall have the power to act on behalf of the City for all purposes under this Contract. Contractor shall not accept direction or orders from any person other than the City's Representative or his or her designee.

3.17.2 Contractor's Representative. Before starting the Work, Contractor shall submit in writing the name, qualifications and experience of its proposed representative who shall

be subject to the review and approval of the City ("Contractor's Representative"). Following approval by the City, Contractor's Representative shall have full authority to represent and act on behalf of Contractor for all purposes under this Contract. Contractor's Representative shall supervise and direct the Work, using his best skill and attention, and shall be responsible for all construction means, methods, techniques, sequences, and procedures and for the satisfactory coordination of all portions of the Work under this Contract. Contractor's Representative shall devote full time to the Project and either he or his designee, who shall be acceptable to the City, shall be present at the Work site at all times that any Work is in progress and at any time that any employee or subcontractor of Contractor is present at the Work site. Arrangements for responsible supervision, acceptable to the City, shall be made for emergency Work which may be required. Should Contractor desire to change its Contractor's Representative, Contractor shall provide the information specified above and obtain the City's written approval.

3.17.3 Termination. This Contract may be terminated by City at any time, either with or without cause, by giving Contractor three (3) days advance written notice. In the event of termination by City for any reason other than the fault of Contractor, City shall pay Contractor for all Work performed up to that time as provided herein. In the event of breach of the Contract by Contractor, City may terminate the Contract immediately without notice, may reduce payment to Contractor in the amount necessary to offset City's resulting damages, and may pursue any other available recourse against Contractor. Contractor may not terminate this Contract except for cause. In the event this Contract is terminated in whole or in part as provided, City may procure, upon such terms and in such manner as it may determine appropriate, services similar to those terminated. Further, if this Contract is terminated as provided, City may require Contractor to provide all finished or unfinished documents, data, diagrams, drawings, materials or other matter prepared or built by Contractor in connection with its performance of this Contract.

3.17.4 Contract Interpretation. Should any question arise regarding the meaning or import of any of the provisions of this Contract or written or oral instructions from City, the matter shall be referred to City's Representative, whose decision

3.17.5 Anti-Trust Claims. This provision shall be operative if this Contract is applicable to California Public Contract Code Section 7103.5. In entering into this Contract to supply goods, services or materials, Contractor hereby offers and agrees to assign to the City all rights, title, and interest in and to all causes of action it may have under Section 4 of the Clayton Act (15 U.S.C. Section 15) or under the Cartwright Act (Chapter 2, commencing with Section 16700, of Part 2 of Division 7 of the Business and Professions Code) arising from purchases of goods, services, or materials pursuant to the Contract. This assignment shall be made and become effective at the time the City tender final payment to Contractor, without further acknowledgment by the Parties.

3.17.6 Notices. All notices hereunder and communications regarding interpretation of the terms of the Contract or changes thereto shall be provided by the mailing thereof by registered or certified mail, return receipt requested, postage prepaid and addressed as follows:

CONTRACTOR:

Tosted Asphalt, Inc
P.O. Box 27014
Fresno, CA 93729
Attn: Jose Perez, Owner

CITY:

City of Merced
2525 "O" Street
Merced, California 95340
Attn: Mr. Michael A Wegley, PE
Interim City Engineer

Any notice so given shall be considered received by the other Party three (3) days after deposit in the U.S. Mail as stated above and addressed to the Party at the above address. Actual notice shall be deemed adequate notice on the date actual notice occurred, regardless of the method of service.

3.17.7 Time of Essence. Time is of the essence in the performance of this Contract.

3.17.8 Assignment Forbidden. Contractor shall not, either voluntarily or by action of law, assign or transfer this Contract or any obligation, right, title or interest assumed by Contractor herein without the prior written consent of City. If Contractor attempts an assignment or transfer of this Contract or any obligation, right, title or interest herein, City may, at its option, terminate and revoke the Contract and shall thereupon be relieved from any and all obligations to Contractor or its assignee or transferee.

3.17.9 No Third Party Beneficiaries. There are no intended third party beneficiaries of any right or obligation assumed by the Parties.

3.17.10 Governing Laws; Venue. This Agreement shall be interpreted in accordance with the laws of the State of California. If any action is brought to interpret or enforce any term of this Agreement, the action shall be brought in a state or federal court situated in the County of Merced, State of California.

3.17.11 Counterparts. This Contract may be executed in counterparts, each of which shall constitute an original.

3.17.12 Successors. The Parties do for themselves, their heirs, executors, administrators, successors, and assigns agree to the full performance of all of the provisions contained in this Contract.

3.17.13 [Reserved]

3.17.14 Solicitation. Contractor maintains and warrants that it has not employed nor retained any company or person, other than a bona fide employee working solely for Contractor, to solicit or secure this Contract. Further, Contractor warrants that it has not paid nor has it agreed to pay any company or person, other than a bona fide employee working solely for Contractor, any fee, commission, percentage, brokerage fee, gift or other consideration contingent upon or resulting from the award or making of this Contract. For breach or violation of this warranty, City shall have the right to terminate this Contract without liability.

3.17.15 Conflict of Interest. Contractor maintains and warrants that it has not employed nor retained any company or person, other than a bona fide employee working solely for Contractor, to solicit or secure this Agreement. Further, Contractor warrants that it has not paid nor has it agreed to pay any company or person, other than a bona fide employee working solely for Contractor, any fee, commission, percentage, brokerage fee, gift or other consideration contingent upon or resulting from the award or making of this Agreement. For breach or violation of this warranty, City shall have the right to rescind this Agreement without liability. For the term of this Contract, no official, officer or employee of City, during the term of his or her service with City, shall have any direct interest in this Contract, or obtain any present or anticipated material benefit arising therefrom. In addition, Contractor agrees to file, or to cause its employees or subcontractors to file, a Statement of Economic Interest with the City's Filing Officer as required under state law in the performance of the Work.

3.17.16 Certification of License.

3.17.16.1 Contractor certifies that as of the date of execution of this Contract, Contractor has a current contractor's license of the classification indicated below under Contractor's signature.

3.17.16.2 Contractors are required by law to be licensed and regulated by the Contractors' State License Board which has jurisdiction to investigate complaints against contractors if a complaint regarding a patent act or omission is filed within four (4) years of the date of the alleged violation. A complaint regarding a latent act or omission pertaining to structural defects must be filed within ten (10) years of the date of the alleged violation. Any questions concerning a contractor may be referred to the Registrar, Contractors' State License Board, P.O. Box 26000, Sacramento, California 95826.

3.17.17 Authority to Enter Contract. Each Party warrants that the individuals who have signed this Contract have the legal power, right and authority to make this Contract and bind each respective Party.

3.17.18 Entire Contract; Modification. This Contract contains the entire agreement of the Parties with respect to the subject matter hereof, and supersedes all prior negotiations, understandings or agreements. This Contract may only be modified by a writing signed by both Parties.

3.17.19 Non-Waiver. None of the provisions of this Agreement shall be considered waived by either party, unless such waiver is specifically specified in writing.

3.17.20 City's Right to Employ Other Contractors. City reserves right to employ other contractors in connection with this Project or other projects.


[SIGNATURES ON NEXT PAGE]


**SIGNATURE PAGE FOR CONSTRUCTION CONTRACT
BETWEEN THE CITY OF MERCED
AND TOSTED ASPHALT, INC.**

IN WITNESS WHEREOF, the Parties have entered into this Agreement as of the 10th day of June, 2024.

CITY OF MERCED

TOSTED ASPHALT, INC

By: 
D. Scott McBride
City Manager

By: 

Printed Name: BRINN HOLDEN

ATTEST:
By: 
Deputy City Clerk

Title: OFFICE MANAGER

Address: PO BOX 27014

(SEAL)



FRESNO CA 93729

Phone: 559.441.0137

Fax: 559.441.0133

Email: BRINN@TOSTEDASPHALT.COM

Taxpayer ID No.: 27-5222584


914
ACCOUNT DATA:

Vendor No.: 1922

Project No.: CP210055 220024

Project Account Number(s) / Amount:
CP220024 - Str & Sgnl - CON - CIP Infr
50056015 - 591003 \$179,543.03

APPROVED AS TO FORM:

By: 
Finance Officer Verification V-1922
Funds available. xc 6/7/24
FL 6/9/24

By: 
City Attorney

EXHIBIT "A" - SERVICES / SCHEDULE

ITEM NO.	ITEM	UNIT OF MEASURE	ESTIMATED QUANTITY	UNIT PRICE	ITEM TOTAL
1	Permits, Bonds, Licenses & Insurance	LS	1	\$10,000.00	\$10,000.00
2	Public Convenience and Safety	LS	1	\$5,000.00	\$5,000.00
3	Water Pollution Control	EA	1	\$2,500.00	\$2,500.00
4	Portable Changeable Sign	EA	2	\$750.00	\$1,500.00
5	Project Funding Signs	EA	2	\$500.00	\$1,000.00
6	Clearing and Grubbing	EA	1	\$7,500.00	\$7,500.00
7	Remove Concrete	SF	4,254	\$4.70	\$19,993.80
8	Remove Concrete Curb and Gutter	LF	90	\$22.22	\$1,999.80
9	Remove Asphalt Concrete	SF	180	\$11.11	\$1,999.80
10	Remove Tree	EA	1	\$8,000.00	\$8,000.00
11	Concrete Sidewalk	SF	4,254	\$10.81	\$45,985.74
12	Concrete Curb and Gutter	LF	90	\$27.78	\$2,500.20
13	Asphalt Concrete	SF	180	\$25.00	\$4,500.00
14	Paint Curb Red	LF	59	\$25.42	\$1,499.78
15	Restoration	LS	1	\$2,500.00	\$2,500.00
TOTAL BASE BID ITEMS 1-15					\$116,479.12

BID ALTERNATE 1 SCHEDULE – R STREET SIDEWALK REPLACEMENT CHILDS TO 13TH STREET

ITEM NO.	ITEM	UNIT OF MEASURE	ESTIMATED QUANTITY	UNIT PRICE (IN FIGURES)	ITEM TOTAL (IN FIGURES)
1	Permits, Bonds, Licenses & Insurance	LS	1	\$00.00	\$00.00
2	Public Convenience and Safety	LS	1	\$5,000.00	\$5,000.00
3	Water Pollution Control	EA	1	\$2,500.00	\$2,500.00
4	Clearing and Grubbing	EA	1	\$6,500.00	\$6,500.00
5	Remove Concrete	SF	2841	\$4.70	\$13,352.70
6	Concrete Sidewalk	SF	2841	\$10.81	\$30,711.21
7	Restoration	LS	1	\$5,000.00	\$5,000.00
TOTAL BID ALT. 1					\$63,063.91

The work to be performed includes, but not limited to, remove of existing sidewalk, curb & gutter, asphalt concrete, and tree(s). The contractor is to install new sidewalk, new curb and gutter, paint new curb red and new asphalt concrete.

Such other items or details, not mentioned above, that are required by the Drawings and Technical Specifications Plans, City of Merced Standard Specifications and Typical Details, and the Special Conditions shall be performed, placed, constructed, or installed.

The project is located on R Street between Childs Avenue to 13th Street. Bids are required for the entire work described herein.

The work shall be Completed within **90 working days** of Notice to Proceed.

PERFORMANCE

The Contractor shall furnish all labor, materials, tools, equipment, and supplies for all work described in the Plans and the Special Conditions.

COORDINATION/OPERATION

The Contractor shall notify the Engineer at (209) 385-6548 at least three (3) working days in advance of the tentative start date.

The Contractor shall be responsible for obtaining all permits and coordinating with all utility companies, including the City, with respect to the location of existing underground facilities in the construction area. The Contractor shall call a designated service area at (209) 832-2444 at least 2 working days before commencing work at the location of the existing facilities. Utility facilities damaged during the work shall be replaced at the Contractor's expense. Full compensation for contract time for the various components of work involved and for a stoppage of work will be made.

INSPECTION OF SITE

The Contractor shall inspect the work site and note all existing conditions before submitting a bid for this project. A site tour is scheduled immediately following the pre-bid BE meeting for project.

DUST CONTROL

It shall be the responsibility of the Contractor to minimize dust emissions from all activities. Water truck shall be used to suppress dust during all activities. Full compensation for contract time for the various components of work involved and for a stoppage of work will be made.

PERMITS, BONDS, LICENSES AND INSURANCE

The Contractor shall obtain all permits, licenses, and insurance required for the project. Payment for all permits, licenses, and insurance shall be made by the Contractor. Full compensation for contract time for the various components of work involved and for a stoppage of work will be made.

EXHIBIT "B" - DRAWINGS AND TECHNICAL SPECIFICATIONS

SCOPE OF WORK

The Work to be performed is included in Exhibit B – Drawings and Technical Specifications. Such other items or details not mentioned above (Exhibit A), that are required by the drawings, and technical specifications, or the following special conditions (Exhibit C) shall be performed, placed, constructed or installed.

PERFORMANCE

The Contractor shall furnish all labor, materials, tools, equipment, incidentals, and do all work described in the Plans and these Special Provisions.

COORDINATION/COOPERATION

The Contractor shall notify the Engineer at (209) 385-6846 at least three (3) working days in advance of the tentative starting date.

The Contractor shall be responsible for contacting and coordinating with all utility companies, including the City, with regards to the location of existing underground facilities in the construction area. The Contractor shall call Underground Service Alert at (800) 642-2444, at least 2 working days before commencement of underground work for location of underground facilities.

Utility facilities damaged, temporarily disconnected, or relocated as a result of construction shall be repaired/reconnected as directed by the governing utility at the Contractor's expense.

Full compensation for conforming to the requirements of this section shall be considered as included in the price paid for the various contract items of work involved and no additional compensation will be made.

INSPECTION OF SITE

The Contractor shall inspect the work site and note all existing conditions before submitting a bid for this project. A site tour is scheduled immediately following the pre-bid/LBE meeting if requested.

DUST CONTROL

It shall be the responsibility of the Contractor to minimize dust during earth moving operations. A water truck shall be made available if necessary for dust control.

Full compensation for conforming to the requirements of this section shall be considered as included in the price paid for the various contract items of work involved and no additional compensation will be made.

PERMITS, BONDS, LICENSES AND INSURANCE

The Contractor shall procure all permits, bonds, licenses, and insurance, pay all charges and fees, and give all notices necessary and incidental to the prosecution of the work.

Payment for "Permits, Bonds, Licenses and Insurance," shall be at the contract lump sum price as set forth in the proposal, and shall include all fees associated with permits, bonds, licenses, inspections, and all other fees necessary for the completion of this item.

PUBLIC CONVENIENCE AND SAFETY

The Contractor shall be responsible for all the provisions of this item, including issuance of all notices necessary for prosecution of the work.

Construction Area Signs -- Construction area signs and traffic cones shall be furnished, installed, maintained, and removed when no longer required in accordance with the provisions in Section 12, "Temporary Traffic Control," of the State Specifications, and these Special Provisions. Specifically included in this item are all detour signage.

The Contractor shall notify the appropriate regional notification center for operators of subsurface installations at least two (2) working days, but not more than 14 calendar days, prior to commencing any excavation for construction area signposts. The regional notification centers include, but not limited to the following:

<u>Notification Center</u>	<u>Telephone</u>
Underground Service Alert (USA) (Northern California)	1-800-227-2600

All excavations required to install construction area signs shall be performed by hand methods without the use of power equipment, except that power equipment may be used if it is determined that there were no utility facilities in the area of the proposed post holes.

Sign substrates for stationary mounted construction area signs may be fabricated from fiberglass reinforced plastic as specified under "Prequalified and Tested Signing and Delineation Materials" elsewhere in these Special Provisions.

Type IV reflective sheeting for sign panels for portable construction area signs shall conform to the requirements specified under "Prequalified and Testing Signing and Delineation Materials" elsewhere in these Special Provisions.

The term "construction area signs" shall also include temporary object markers required for the direction of public traffic through or around the work during construction. Object markers listed or designated on the plans as construction area signs shall be considered to be signs and shall be furnished, erected, maintained and removed by the Contractor in the same manner specified for construction area signs and the following:

Object markers shall be stationary mounted on wood or metal posts in accordance with the details shown on the plans and the requirements in Section 82, "Markers and Delineators," of the Standard Specifications.

Marker panels for Type N, Type P and Type R object markers shall conform to the requirements for sign panels for stationary mounted signs.

Target plates for Type K and Type L object markers and posts, reflectors and hardware shall conform to the requirements in said Section 82 but need not be new.

When a street section is to be closed, it shall be solidly barricaded, and signs shall be posted at the closure points indicating "Street Closed."

Full cost of providing and removing construction area signs shall be borne exclusively by the Contractor and shall be considered as included in the contract lump sum price for Item 10-1.07, "Public Convenience & Safety."

Maintaining Traffic -- Attention is directed to Section 7-1.03, "Public Convenience," Section 7-1.04, "Public Safety," and Section 12, "Temporary Traffic Control," of the State Specifications. Nothing in these Special Provisions shall be construed as relieving the Contractor from its responsibility as provided in Section 7-1.04 of the State Specifications.

All traffic cones used for night lane closures shall have reflective cone sleeves as specified in the specifications. One (1) 12-foot wide traffic lane must be open at all times.

The second and third paragraphs of Section 12-3.10, "Traffic Cones," of the State Standard Specifications are amended to read:

The type of reflective cone sleeve used shall be at the option of the Contractor. Only one type of reflective cone sleeve shall be used on the project.

Lane closures shall conform to the provisions in the section of these special provisions entitled "Traffic Control System for Lane Closure."

Personal vehicles of the Contractor's employees shall not be parked on the traveled way or shoulders, including any section closed to public traffic.

The Contractor shall notify local authorities of its intent to begin work at least five (5) days before work is begun. The Contractor shall cooperate with local authorities relative to handling traffic through the area and shall make its own arrangements relative to keeping the working area clear of parked vehicles.

The Contractor shall provide access to all businesses and residences within the construction zone at all times throughout the project. When the work requires the closing of a business driveway or other entrance, the Contractor shall post signs directing the public to the most convenient access to the business.

The Contractor shall provide access to all private driveways when construction is not actively in progress. Access to driveways fronting the construction area shall not be hindered or blocked for time periods greater than 4 hours without notifying the property owner or tenant in writing 24 hours prior to blockage.

The Contractor shall provide safe public access around the work site in accordance with the American Disabilities Act requirements during the work.

Whenever vehicles or equipment are parked on the shoulder within six feet of a traffic lane, the shoulder area shall be closed with fluorescent traffic cones or portable delineators placed on a taper in advance of the parked vehicles or equipment and along the edge of the pavement at 25-foot intervals to a point not less than 25 feet past the last vehicle or piece of equipment. A minimum of nine (9) cones or portable delineators shall be used for the taper. A C23 (Road Work Ahead) or C24 (Shoulder Work Ahead) sign shall be mounted on a telescoping flag tree with flags. The flag tree shall be placed where directed by the Engineer.

When the Contractor's operations create a condition hazardous to traffic or to the public, he shall furnish, erect and maintain, at his expense and without cost to the City, such fences, barricades,

lights, signs and other devices as are necessary to prevent accidents or damage or injury to the public. The Contractor shall also furnish such flagmen, provided with the necessary equipment kept clean and in good condition by the Contractor at his expense, as may be necessary to give adequate warning to traffic or to the public that the roadway is under construction or of any dangerous conditions to be encountered. The flagmen shall perform their duties and their work of furnishing and placing such signs, lights, flags and other warning and safety devices as set forth in the current "Work Area Traffic Control Handbook" as published by the Building News, Inc., Los Angeles, California.

Minor deviations from the requirements of this section concerning hours of work which do not significantly change the cost of the work may be permitted upon the written request of the Contractor if, in the opinion of the Engineer, public traffic will be better served, and the work expedited. Such deviations shall not be adopted until the Engineer has indicated its written approval. All other modifications will be made by contract change order.

Full cost of conforming to this section shall be considered as included in the contract lump sum price for "Public Convenience and Safety."

Traffic Control System for Lane Closure -- A traffic control system shall be provided by the Contractor and shall be in accordance with the provisions of Section 12, "Temporary Traffic Control," of the State Specifications, the provisions under "Maintaining Traffic" elsewhere in these Special Provisions.

The provisions in this section shall not relieve the Contractor from its responsibility to provide such additional devices, or take such measures as may be necessary, to comply with the provisions in Section 7-1.04, "Public Safety," of the State Standard Specifications.

Prior to any lane closures, it shall be the responsibility of the Contractor to provide 72-hour notice to the City and obtain City approval of the lane closure. Failure to notify the City in a timely manner is cause for the City to prevent the lane closure.

Whenever a lane closure is made, the Contractor shall close the lane by placing fluorescent traffic cones, portable cones, portable delineators, or other devices approved by the Engineer, along a taper and along the edge of the closed lane adjacent to public traffic. One telescoping flag tree with flags shall be placed at the beginning and at the end of the taper.

If any component in the traffic control system is displaced or ceases to operate or function as specified, from any cause, during the progress of the work, the Contractor shall immediately repair said component to its original condition or replace said component, and shall restore the component to its original location. Full cost of providing flaggers shall be borne exclusively by the Contractor.

The Contractor shall submit a traffic control plan and approved by the City Engineer prior to commencing any work.

Protection of the Work -- To minimize traffic congestion during the resurfacing operation, the work shall be done in stages. Residents with driveways within the closed section shall be notified at least 24 hours in advance of closure via door hangers and signs within the limits of the project. Barricades and signs and their cost of replacement, the cost of flagmen necessary for the protection of the work and the public and costs of notification of affected residents will be considered as included in the contract price paid for bid items shown in the proposal, and no separate payments shall be made.

Payment for "Public Convenience and Safety," shall be at the contract lump sum price as set forth in the proposal, and shall include all labor, materials, tools, equipment, and all work necessary for the completion of this item.

WATER POLLUTION CONTROL

Summary

It shall be the responsibility of the Contractor to comply with all of the requirements of the latest NPDES General Permit for "Storm Water Discharges Associated with Construction and Land Disturbance Activities" (Order No. 2009-0009-DWQ, NPDES No. CAS000002) hereinafter called the "Permit" and standard industry practice.

This includes, but is not limited to, preparing plans and application, maps as well as all necessary reporting on the SWQCB's Storm Water Multiple Application and Report Tracking System (SMARTS System). The Contractor, working with their certified Qualified Storm Water Pollution Prevention Plan (SWPPP) Developer (QSD), will determine what would be the best course of action to comply with the latest State NPDES General Permit for Storm Water Discharges Associated with Construction and Land Disturbance Activities Order No. 2009-0009- DWQ. If the Contractor's QSD determines a SWPPP is the best course of action, it shall be the responsibility of the Contractor and their QSD to submit to Construction Management a completed SWPPP for review. Upon acceptance of the SWPPP document by Construction Management, the QSD shall prepare a Notice of Intention (NOI) application in the SWQCB's SMARTS System and upload all necessary documents and maps to be approved by the Legally Responsible Person (LRP). Until a written approval of the SWPPP has been obtained from the SWQCB, no construction activity shall commence on the project site. Upon obtaining written approval of the SWPPP, it shall be the responsibility of the Contractor to implement the SWPPP. Throughout the course of the project, the Contractor's Qualified SWPPP Practitioner (QSP) shall conduct periodic inspections, testing, any reporting on the SMARTS System as well as coordinate with the QSD to update the SWPPP as necessary. At the conclusion of construction, it shall be the responsibility of the Contractor and his or her QSD/QSP to ensure Annual Report(s) have been prepared on the SMARTS System as well as prepare the Notice of Termination (NOT) for City's approval. The Contractor shall keep a copy of the approved SWPPP, and amendments thereto, at the job site and in the general business office of the Contractor. In addition, the Contractor shall make available to Construction Management copies of all amendments to the SWPPP as prepared by the Contractor. The SWPPP shall be made available upon request of a representative of the Fresno Metropolitan Flood Control District, Regional Water Quality Control Board, State Water Resources Control Board or U. S. Environmental Protection Agency. Requests by the public shall be directed to the Engineer.

If the Contractor and/or his/her QSD determines that a SWPPP is not necessary, then it shall be the responsibility of the Contractor to provide a list of Best Management Practices (BMP) that are to be implemented during the Work to Construction Management. The Contractor shall implement the BMP in a timely manner and maintain throughout the duration of the project. The Contractor shall keep a copy of the BMP list and any modification to the list at the job site and in the general business office of the Contractor. In addition, the Contractor shall make available to the City copies of all modifications to the BMP list. The BMP list shall be made available upon request of a representative of the Fresno Metropolitan Flood Control District, Regional Water Quality Control Board, State Water Resources Control Board or U. S. Environmental Protection Agency. Requests by the public shall be directed to Construction Management.

Notice of violation and/or fines for any non-compliance will be the responsibility of the Contractor.

Manage work activities to reduce the discharge of pollutants to surface waters, groundwater, or municipal separate storm sewer systems including work items shown in the Bid Item List for:

1. Prepare Storm Water Pollution Prevention Plan. SWPPP preparation includes obtaining SWPPP approval, amending the SWPPP, preparing a CSMP and a SAP, and monitoring and inspecting WPC practices at the job site.
2. Storm Water Annual Report. Storm Water Annual Report preparation includes certifications, monitoring and inspection results, and obtaining Storm Water Annual Report acceptance.
3. Storm Water Sampling and Analysis Day. Storm Water Sampling and Analysis Day includes reporting of storm water quality per qualifying rain event. If specified for the risk level, the work includes preparation, collection, analysis, and reporting of storm water samples for turbidity, pH, and other constituents.
4. Rain Event Action Plan. If specified for the project risk level, REAP preparation includes preparing and submitting REAP forms and monitoring weather forecasts.

Do not start work until:

1. SWPPP is approved by the City.
2. SWPPP is uploaded onto the SMART System.
3. WDID is issued.
4. SWPPP review requirements have been fulfilled. If the RWQCB requires time for SWPPP review, allow 30 days for the RWQCB to review the SWPPP as specified under "Submittals" of these special provisions.

This project is anticipated to be Risk Level 1.

Definitions and Abbreviations

active and inactive areas: (1) Active areas have soil disturbing work activities occurring at least once within 14 days, and (2) Inactive areas are areas that have not been disturbed for at least 15 days.

BMPs: Best Management Practices are water pollution control practices.

construction phase: Construction phases are (1) Highway Construction including work activities for building roads and structures, (2) Plant Establishment including maintenance on vegetation installed for final stabilization, and (3) Suspension where work activities are suspended and areas are inactive.

CSMP: Construction Site Monitoring Program.

NAL: Numeric Action Level.

NEL: Numeric Effluent Limit.

NPDES: National Pollutant Discharge Elimination System.

NOI: Notice of Intent.

Normal working hours: The hours you normally work on this project.

Preparation Manual: The Department's "Storm Water Pollution Prevention Plan and Water Pollution Control Program Preparation Manual."

QSD: Qualified SWPPP Developer.

QSP: Qualified SWPPP Practitioner.

Qualified rain event: A qualified rain event is a storm that produces at least 0.5 inch of precipitation with a 48 hour or greater period between storms.

REAP: Rain Event Action Plan.

RWQCB: Regional Water Quality Control Board.

SAP: Sampling and Analysis Plan.

SSC: Suspended Sediment Concentration.

SWRCB: State Water Resources Control Board. **SWPPP:** Storm Water Pollution Prevention Plan. **WDID:** Waste Discharge Identification Number. **WPC:** Water Pollution Control.

WPC Manager: Water Pollution Control Manager. The WPC Manager implements water pollution control work described in the SWPPP and oversees revisions and amendments to the SWPPP.

Submittals

Within 20 days after contract approval, start the following process for SWPPP approval:

1. Submit 3 copies of the SWPPP and allow 20 days for the Engineer's review. If revisions are required, the Engineer provides comments and specifies the date that the review stopped.
2. Change and resubmit the SWPPP within 15 days of receipt of the Engineer's comments. The Engineer's review resumes when the complete SWPPP is resubmitted.
3. When the Engineer approves the SWPPP, submit an electronic and 4 printed copies of the approved SWPPP.
4. If the RWQCB reviews the approved SWPPP, the Engineer submits one copy of the approved SWPPP to the RWQCB for their review and comment. RWQCBs requiring time to review SWPPPs include:
5. If the Engineer requests changes to the SWPPP based on RWQCB comments, amend the SWPPP within 10 days.

Submit:

1. Storm water training records including training dates and subjects for employees and subcontractors. Include dates and subjects for ongoing training, including tailgate meetings.
2. Employee training records.
 - 2.1. Within 5 days of SWPPP approval for existing employees
 - 2.2. Within 5 days of training for new employees
 - 2.3. At least 5 days before subcontractors start work for subcontractor's employees

Prepare a Storm Water Annual Report for the reporting period from July 1st to June 30th. For the prior reporting period, submit the report no later than July 15th if construction occurs from July 1st through June 30th or within 15 days after contract acceptance if construction ends before June 30th. Submit the Storm Water Annual Report as follows:

1. Submit 2 copies of the Storm Water Annual Report and allow 10 days for the Engineer's review. If revisions are required, the Engineer provides comments and specifies the date that the review stopped.
2. Change and resubmit the Storm Water Annual Report within 5 days of receipt of the Engineer's comments. The Engineer's review resumes when the complete Storm Water Annual Report is resubmitted.
3. When the Engineer accepts the Storm Water Annual Report, insert the WPC Manager's signed certification and the Engineer's signed certification.

Submit one electronic copy and 2 printed copies of the accepted Storm Water Annual Report. Submit as required:

1. NAL Exceedance Reports
2. NEL Exceedance Reports
3. Visual Monitoring Reports
4. Inspection Reports
5. BMP Status Report

At least 5 days before operating any construction support facility, submit:

1. A plan showing the location and quantity of WPC practices associated with the construction support facility
2. A copy of the NOI approved by the RWQCB and the SWPPP approved by the RWQCB if you will be operating a batch plant or a crushing plant under the General Industrial Permit

Quality Control and Assurance Training

Provide storm water training for:

1. Project managers
2. Supervisory personnel
3. Employees involved with WPC work

Train all employees, including subcontractor's employees, in the following subjects:

1. WPC rules and regulations
2. Implementation and maintenance for:
 - 2.1. Temporary Soil Stabilization
 - 2.2. Temporary Sediment Control
 - 2.3. Tracking Control
 - 2.4. Wind Erosion Control
 - 2.5. Material pollution prevention and control
 - 2.6. Waste management
 - 2.7. Non-storm water management
 - 2.8. Identifying and handling hazardous substances
 - 2.9. Potential dangers to humans and the environment from spills and leaks or exposure to toxic or hazardous substances

Employees must receive initial WPC training before working on the job site. Conduct weekly training meetings covering:

1. WPC BMP deficiencies and corrective actions
2. BMPs that are required for work activities during the week
3. Spill prevention and control
4. Material delivery, storage, use, and disposal
5. Waste management
6. Non-storm water management procedures

Training for personnel to collect water quality samples must include:

1. SAP review
2. Health and safety review
3. Sampling simulations

A Storm Water Information Handout has been prepared for this contract and is available as described in "Supplemental Project Information" of these special provisions.

If you operate construction support facilities, protect storm water systems or receiving waters from the discharge of potential pollutants by using WPC practices.

Construction support facilities include:

1. Staging areas
2. Storage yards for equipment and materials
3. Mobile operations
4. Batch plants for PCC and HMA
5. Crushing plants for rock and aggregate
6. Other facilities installed for your convenience such as haul roads

If you operate a batch plant to manufacture PCC, HMA, or other material; or a crushing plant to produce rock or aggregate; obtain coverage under the General Industrial General Permit. You must be covered under the General Industrial Permit for batch plants and crushing plants located:

1. Outside of the job site
2. Within the job site that serve one or more contracts

Discharges from manufacturing facilities such as batch plants must comply with the general waste discharge requirements for Order No. 97-03-DWQ, NPDES General Permit No. CAS000001, issued by the SWRCB for "Discharge of Stormwater Associated with Industrial Activities Excluding Construction Activities." For the General Industrial Permit, go to:

<http://www.waterboards.ca.gov/>

You may obtain copies of the Preparation Manual from the Publication Distribution Unit. The mailing address for the Publication Distribution Unit is:

State of California
Department of Transportation
Publication Distribution Unit
1900 Royal Oaks Drive
Sacramento, California 95815
Telephone: (916) 445-3520

The Preparation Manual and other WPC references are available at the Department's "Construction Storm Water and Water Pollution Control" Web site. For the Web site, go to:

<http://www.dot.ca.gov/hq/construc/stormwater/stormwater1.htm>

Water Pollution Control Manager

Assign one WPC Manager to implement the SWPPP. The WPC Manager must comply with the Permit qualifications for a QSP and a QSD. You may assign a different QSD to prepare the SWPPP.

The QSD must have the following qualifications:

1. Department approved storm water management training described in the Department's "Construction Storm Water and Water Pollution Control" web site
2. Registration or certification described in the Permit

The QSP must meet the qualifications of the QSD or have the following certifications:

1. Department approved storm water management training described in the Department's "Construction Storm Water and Water Pollution Control" web site
2. Certification described in the Permit

At the job site, the WPC Manager must:

1. Be responsible for WPC work
2. Be the primary contact for WPC work
3. Oversee the maintenance of WPC practices
4. Oversee and enforce hazardous waste management practices
5. Have the authority to mobilize crews to make immediate repairs to WPC practices
6. Ensure that all employees have current water pollution control training
7. Implement the approved SWPPP and amend the SWPPP when required

WPC Manager must oversee:

1. Inspections of WPC practices identified in the SWPPP
2. Inspections and reports for visual monitoring
3. Preparation and implementation of REAPs
4. Sampling and analysis
5. Preparation and submittal of:
 - 5.1. NAL exceedance reports
 - 5.2. NEL exceedance reports
 - 5.3. SWPPP annual certification
 - 5.4. Annual reports
 - 5.5. BMP status reports

STORM WATER POLLUTION PREVENTION PLAN (SWPPP)

General

SWPPP work includes preparing a SWPPP including a CSMP, obtaining SWPPP approval, amending the SWPPP, inspecting and reporting on WPC practices at the job site. The SWPPP must comply with the Preparation Manual and the Permit. The SWPPP must be submitted in place of the water pollution control program under Section 13-2, "Water Pollution Control Program," of the Standard Specifications.

Additional WPC work will be paid for as extra work under Section 4-1.05, "Changes and Extra Work," of the Standard Specifications.

The SWPPP must include sections as specified for the project risk level as follows:

1. For risk level 1:
 - 1.1. Schedule
 - 1.2. CSMP

2. For risk level 2:
 - 2.1. Schedule
 - 2.2. CSMP
 - 2.3. Adherence to Effluent Standards for NALs
 - 2.4. REAP
3. For risk level 3:
 - 3.1. Schedule
 - 3.2. CSMP
 - 3.3. Adherence to Effluent Standards for NALs and NELs
 - 3.4. REAP

The SWPPP must include WPC practices for:

1. Storm water and non-stormwater from areas outside of the job site related to project work activities such as:
 - 1.1. Staging areas
 - 1.2. Storage yards
 - 1.3. Access roads
2. Activities or mobile operations related to contractor obtained NPDES permits
3. Construction support facilities

The SWPPP must include a copy of permits obtained by the Department such as Fish & Game permits, US Army Corps of Engineers permits, RWQCB 401 Certifications, and RWQCB Waste Discharge Requirements for Aerially Deposited Lead Reuse.

Amend the SWPPP annually and resubmit it by July 15th. Amend the SWPPP if:

1. Changes in work activities could affect the discharge of pollutants
2. WPC practices are added by change order work
3. WPC practices are added at your discretion
4. Changes in the amount of disturbed soil are substantial
5. Objectives for reducing or eliminating pollutants in storm water discharges have not been achieved
6. There is a Permit violation

Whenever you amend the SWPPP, follow the same process specified for SWPPP approval. Retain a printed copy of the approved SWPPP at the job site.

SWPPP Schedule

The SWPPP schedule must:

1. Describe when work activities will be performed that could cause the discharge of pollutants into storm water
2. Describe WPC practices associated with each construction phase
3. Identify soil stabilization and sediment control practices for disturbed soil areas

Construction Site Monitoring Program (CSMP)

General

The QSD must prepare a CSMP as part of the SWPPP. The CSMP must be developed before starting work and be revised to reflect current construction activities as necessary.

The CSMP must include sections for the project risk level as follows:

1. For risk level 1:
 - 1.1. Visual Monitoring
 - 1.2. SAP for Non-Visible Pollutants
2. For risk level 2:
 - 2.1. Visual Monitoring
 - 2.2. SAP for Non-Visible Pollutants
 - 2.3. SAP for sediment and turbidity
 - 2.4. SAP for pH
3. For risk level 3:
 - 3.1. Visual Monitoring
 - 3.2. SAP for Non-Visible Pollutants
 - 3.3. SAP for sediment and turbidity
 - 3.4. SAP for pH
 - 3.5. SAP for receiving waters
 - 3.6. SAP for temporary active treatment systems

Visual Monitoring

The WPC Manager must oversee the performance of visual inspections for qualifying rain events. For each qualifying rain event, perform visual inspections and record observations during normal working hours as follows:

1. Record the time, date, and rain gauge reading
2. Observe:
 - 2.1. Within 2 days before the storm:
 - 2.1.1 Drainage areas for spills, leaks, or uncontrolled pollutants
 - 2.1.2 Proper implementation of WPC practices
 - 2.1.3 Storm water storage areas for leaks and adequate freeboard
 - 2.2. Every 24 hours during the storm:
 - 2.2.1 WPC practices for effective operation
 - 2.2.2 WPC practices needing maintenance and repair
 - 2.3. Within 2 days after the storm event:
 - 2.3.1. Discharge locations
 - 2.3.2. WPC practices to evaluate the design, implementation, and effectiveness
 - 2.3.3. To identify where additional WPC practices may be needed.

Perform non-stormwater discharge visual inspections as follows:

1. At least once during each of the following periods:
 - 1.1. January through March
 - 1.2. April through June
 - 1.3. July through September
 - 1.4. October through December

2. Observe flowing and contained storm water for the presence of floating and suspended materials, sheen on the surface, discoloration, turbidity, odors, and sources of observed pollutants
3. Observe the job site for the presence of authorized and unauthorized non-stormwater discharges and their sources

The WPC Manager must prepare visual inspection reports that include the following:

1. Name of personnel performing the inspection, inspection date, and date inspection report completed
2. Storm and weather conditions
3. Locations and observations
4. Corrective actions taken

Maintain visual inspections reports at the job site as part of the SWPPP.

Sampling and Analysis Plan (SAP)

General

Include a SAP in the CSMP to monitor the effectiveness of WPC practices. The SAP must comply with the Preparation Manual.

Assign trained personnel to collect water quality samples. Document their training in the SAP. Describe the following water quality sampling procedures in the SAP:

1. Sampling equipment
2. Sample preparation
3. Collection
4. Field measurement methods
5. Analytical methods
6. Quality assurance and quality control
7. Sample preservation and labeling
8. Collection documentation
9. Sample shipping
10. Chain of custody
11. Data management and reporting
12. Precautions from the construction site health and safety plan
13. Laboratory selection and certifications

Whenever assigned field personnel take samples, comply with the equipment manufacturer's recommendation for collection, analysis methods, and equipment calibration.

Samples taken for laboratory analysis must follow water quality sampling procedures and be analyzed by a State-certified laboratory under 40 CFR Part 136, "Guidelines Establishing Test Procedures for the Analysis of Pollutants."

The SAP must identify the State-certified laboratory, sample containers, preservation requirements, holding times, and analysis method. For a list of State-certified laboratories, go to:

<http://www.cdph.ca.gov/certlic/labs/Pages/ELAP.aspx>

Include procedure for sample collection during precipitation.

Retain water quality sampling documentation and analytical results with the SWPPP at the job site. Show pollutant sampling locations on SWPPP drawings.

If discharges or sampling locations change because of changed work activities or knowledge of site conditions, amend the SAP.

If the project is risk level 2 or risk level 3, include procedures for collecting and analyzing at least 3 samples for each day of each qualifying rain event. Describe the collection of effluent samples at all locations where the storm water is discharged off-site.

Analytical Results and Evaluation

Submit an electronic copy (in file format .xls, .txt, .csv, .dbf, or .mdb) and a printed copy of water quality analytical results, and quality assurance and quality control within 48 hours of field analysis sampling, and within 30 days for laboratory analysis. Also provide an evaluation of whether the downstream samples show levels of the tested parameter that are higher than the control sample.

Electronic water quality analysis results must have the following information:

1. Sample identification number
2. Contract number
3. Constituent
4. Reported value
5. Analytical method
6. Method detection limit
7. Reported limit

SAP for Non-Visible Pollutants

The SAP must include a description of the sampling and analysis strategy for monitoring non- visible pollutants.

The SAP must identify potential non-visible pollutants present at the job site associated with any of the following:

1. Construction materials and waste
2. Existing contamination due to historical site usage
3. Application of soil amendments, including soil stabilization materials, with the potential to change pH or contribute toxic pollutants to storm water

SWPPP drawings must show the locations planned for storage and use of potential non-visible pollutants.

The SAP must include sampling procedures for the following conditions when observed during a storm water visual inspection. For each of the following, collect at least one sample for each qualifying storm event:

1. Materials or waste containing potential non-visible pollutants that are not stored under watertight conditions
2. Materials or waste containing potential non-visible pollutants that are stored under watertight conditions, but a breach, leakage, malfunction, or spill is observed; the leak

- or spill has not been cleaned up before precipitation; and material or waste could discharge non-visible pollutants to surface waters or drainage system
3. Chemical applications, including fertilizer, pesticide, herbicide, methyl methacrylate concrete sealant, or non-pigmented curing compound used during precipitation or within 24 hours preceding precipitation, and could discharge pollutants to surface waters or drainage system
 4. Applied soil amendments, including soil stabilization materials that could change pH levels or contribute toxic pollutants to storm water runoff and discharge pollutants to surface waters or drainage system, unless available independent test data indicates acceptable concentrations of non-visible pollutants in the soil amendment
 5. Storm water runoff from an area contaminated by historical usage of the site that could discharge pollutants to surface waters or drainage systems

The SAP must provide sampling procedures and schedule for:

1. Sample collection during the first 2 hours of each rain event that generate runoff
2. Sample collection during normal working hours
3. Each non-visible pollutant source
4. Uncontaminated control sample

The SAP must identify locations for sampling downstream and control samples, and reasons for selecting those locations. Select control sample locations where the sample will not come in contact with materials, waste, or areas associated with potential non-visible pollutants or disturbed soil areas.

SAP for Sediment and Turbidity

If the project is risk level 2 or risk level 3, sample and analyze for turbidity:

Parameter	Test Method	Detection Limit (Min)	Unit
Turbidity	Field test with calibrated portable instrument	1	NTU

If the project is risk level 3 and the turbidity NEL has been exceeded, sample and analyze for SSC:

Parameter	Test Method	Detection Limit (Min)	Unit
SSC	ASTM Method D3977-97	5	Mg/L

SAP for pH

If the project is risk level 2 or risk level 3, sample and analyze for pH:

Parameter	Test Method	Detection Limit (Min)	Unit
-----------	-------------	-----------------------	------

pH	Field test with calibrated portable instrument	0.2	pH units
----	--	-----	----------

SAP for Receiving Waters

If the project is risk level 3, describe procedures for obtaining samples from representative and accessible locations:

1. Upstream of the discharge point
2. Downstream of the discharge point

Show receiving water sampling locations on SWPPP drawings.

If there are several discharge points, describe procedures for obtaining samples from a single upstream and a single downstream location.

Rain Event Action Plan (REAP)

REAP work includes preparing and submitting REAP forms and monitoring weather forecasts. The WPC Manager must submit a REAP to protect the job site at least 48 hours before a predicted rain event.

Prepare a REAP when the National Weather Service is predicting at least a 50 percent probability of precipitation within 72 hours.

For the REAP, use approved forms and include:

1. Site location
2. Risk level
3. Contact information including 24-hour emergency phone numbers for:
 - 3.1. WPC Manager
 - 3.2. Erosion and sediment control providers or subcontractors
 - 3.3. Storm water sampling providers or subcontractors
4. Storm Information
5. Construction phase information for:
 - 5.1. Highway Construction including active and inactive areas for work activities for building roads and structures
 - 5.2. Plant Establishment including maintenance on vegetation installed for final stabilization where areas are inactive
 - 5.3. Suspension where work activities are suspended and areas are inactive
6. Construction phase information including:
 - 6.1. Construction activities
 - 6.2. Subcontractors and trades on the job site
 - 6.3. Pre-storm activities including:
 - 6.3.1. Responsibilities of the WPC Manager
 - 6.3.2. Responsibilities of the crew and crew size
 - 6.3.3. Stabilization for active and inactive disturbed soil areas
 - 6.3.4. Stockpile management
 - 6.3.5. Corrective actions taken for deficiencies identified during pre-storm visual inspection

- 6.4. Activities to be performed during storm events including:
 - 6.4.1. Responsibilities of the WPC Manager
 - 6.4.2. Responsibilities of the crew and crew size
 - 6.4.3. BMP maintenance and repair
- 6.5. Description of flood contingency measures

You must have the REAP onsite at least 24 hours before a predicted rain event. A printed copy of each REAP must be at the job site as part of the SWPPP
 Implement the REAP including mobilizing crews to complete activities no later than 24 hours before precipitation occurs.

IMPLEMENTATION REQUIREMENTS

SWPPP Implementation

Obtain, install, and maintain a rain gauge at the job site. Observe and record daily precipitation.

Monitor the National Weather Service Forecast Office on a daily basis. For forecasts, go to:

<http://www.srh.noaa.gov/forecast>

Whenever you or the Engineer identifies a deficiency in the implementation of the approved SWPPP:

1. Correct the deficiency immediately, unless the Engineer agrees to a later date for making the correction
2. Correct the deficiency before precipitation occurs

If you fail to correct the deficiency by the agreed date or before the onset of precipitation, the Department may correct the deficiency and deduct the cost of correcting the deficiency from payment.

Continue SWPPP implementation during any temporary suspension of work activities.

Install WPC practices within 15 days or before predicted precipitation, whichever occurs first.

Numeric Action Levels (NALs)

If the project is risk level 2 or risk level 3, then it is subject to NALs:

Parameter	Test Method	Detection Limit (Min)	Unit	Numeric Action Limit
pH	Field test calibrated with portable instrument	0.2	pH units	Lower NAL = 6.5 Upper NAL = 8.5
Turbidity	Field test calibrated with portable instrument	1	NTU	250 NTU

Numeric Effluent Limits (NELs)

If the project is risk level 3, then it is subject to NELs:

Parameter	Test Method	Detection Limit (Min)	Unit	Numeric Effluent Limit
pH	Field test calibrated with portable instrument	0.2	pH units	Lower NEL = 6.0 Upper NEL = 9.0
Turbidity	Field test calibrated with portable instrument	1	NTU	500 NTU

The storm event daily average for storms up to the 5-year, 24-hour storm, must not exceed the NEL for turbidity.

The daily average sampling results must not exceed the NEL for pH.

Storm Water Sampling and Analysis Day

Storm Water Sampling and Analysis Day work includes preparation, collection, analysis, and reporting of storm water samples for turbidity, pH, and other constituents. If the project is risk level 2 or risk level 3, and there is a qualified rain event that produces runoff, comply with the project's SAP for preparation, collection, analysis, and reporting of storm water samples. Collect:

1. Samples for each non-visible pollutant source and a corresponding uncontaminated control sample
2. Samples for turbidity, pH, and other constituents as specified
3. At least 3 samples for each day of each qualifying rain event
4. Samples for all locations where the storm water is discharged off-site

Perform sample collection during:

1. First 2 hours of each qualified rain event that produces runoff
2. Normal working hours

If the project is risk level 3, obtain receiving water samples.

You are not required to physically collect samples during dangerous weather conditions such as flooding or electrical storms.

If downstream samples show increased levels, assess WPC practices, site conditions, and surrounding influences to determine the probable cause for the increase.

Inspection

The WPC Manager must oversee inspections for WPC practices identified in the SWPPP:

1. Before a forecasted storm
2. After precipitation that causes site runoff
3. At 24-hour intervals during extended precipitation
4. On a predetermined schedule, a minimum of once a week

The WPC Manager must oversee daily inspections of:

1. Storage areas for hazardous materials and waste
2. Hazardous waste disposal and transporting activities
3. Hazardous material delivery and storage activities
4. WPC practices specified under "Construction Site Management" of these special provisions

The WPC Manager must use the Storm Water Site Inspection Report provided in the Preparation Manual.

The WPC Manager must prepare BMP status reports that include the following:

1. Location and quantity of installed WPC practices
2. Location and quantity of disturbed soil for the active or inactive areas

Within 24 hours of finishing the weekly inspection, the WPC Manager must submit:

1. Copy of the completed site inspection report
2. Copy of the BMP status report

REPORTING REQUIREMENTS

Storm Water Annual Report

Storm Water Annual Report work includes certifications, monitoring and inspection results, and obtaining Storm Water Annual Report acceptance. The WPC Manager must prepare a Storm Water Annual Report. The report must:

1. Use an approved report format
2. Include project information including description and location
3. Include storm water monitoring information including:
 - 3.1. Summary and evaluation of sampling and analysis results including laboratory reports
 - 3.2. Analytical methods, reporting units, detection limits for analytical parameters
 - 3.3. Summary of corrective actions
 - 3.4. Identification of corrective actions or compliance activities that were not implemented
 - 3.5. Summary of violations
 - 3.6. Names of individuals performing storm water inspections and sampling
 - 3.7. Logistical information for inspections and sampling including location, date, time, and precipitation
 - 3.8. Visual observations and sample collection records
4. Include documentation on training for:
 - 4.1. Individuals responsible for NPDES permit compliance
 - 4.2. Individuals responsible for BMP installation, inspection, maintenance, and repair
 - 4.3. Individuals responsible for preparing, revising, and amending the SWPPP

NAL Exceedance Report

If the project is risk level 2 or risk level 3 and an effluent sample exceeds a NAL, notify the Engineer and submit a NAL Exceedance Report no later than 48 hours after the conclusion of the storm event. The report must:

1. Include the following field sampling results and inspections:
 - 1.1. Analytical methods, reporting units, and detection limits

- 1.2. Date, location, time of sampling, visual observation and measurements
- 1.3. Quantity of precipitation of the storm event
2. Description of BMPs and corrective actions taken to manage NAL exceedance

NEL Violation Report

If the project is risk level 3 and an NEL is exceeded, notify the Engineer and submit a NEL Violation Report within 6 hours. The report must:

1. Include the following field sampling results and inspections:
 - 1.1. Analytical methods, reporting units, and detection limits
 - 1.2. Date, location, time of sampling, visual observations and measurements
 - 1.3. Quantity of precipitation of the storm event
2. Description of BMPs and corrective actions taken to manage NEL exceedance

If the project is risk level 2 or risk level 3, submit all sampling results to the Engineer no later than 48 hours after the conclusion of a storm event.

PAYMENT

The contract lump sum price paid for "Water Pollution Control" includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in street sweeping, including disposal of collected material, as shown on the plans, as specified in the Standard Specifications, these special provisions, and as directed by the Engineer.

The contract lump sum price paid for prepare storm water pollution prevention plan includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in preparing, obtaining approval of, and amending the SWPPP and CSMP, inspecting water pollution control practices, as specified in the Standard Specifications and these special provisions, and as directed by the Engineer.

The City does not adjust payment for an increase or decrease in the quantity of storm water sampling and analysis day.

You may request or the Engineer may order laboratory analysis of storm water samples. Laboratory analysis of storm water samples will be paid for as extra work under Section 4- 1.05D, "Extra Work," of the State Standard Specifications.

The City does not pay for the preparation, collection, laboratory analysis, and reporting of storm water samples for non-visible pollutants if WPC practices are not implemented before precipitation or if a failure of a WPC practice is not corrected before precipitation.

The City does not pay for implementation of WPC practices in areas outside the highway right-of-way not specifically provided for in the plans or in the special provisions.

The City does not pay for WPC practices installed at your construction support facilities.

WPC practices for which there are separate bid items of work are measured and paid for as those bid items of work.

STREET SWEEPING

This work includes street sweeping.

The SWPPP must describe and include the use of street sweeping as a water pollution control practice for sediment control and tracking control.

Submittals

At least 5 business days before starting clearing and grubbing, earthwork, or other activities with the potential for tracking sediment or debris, submit:

1. Number of sweepers described in the SWPPP
2. Type of sweeper technology

Quality Control and Assurance

Retain and submit records of street sweeping including:

1. Quantity of sweeping waste disposal
2. Sweeping times and locations

CONSTRUCTION

Street Sweepers

Sweepers must use one of these technologies:

1. Mechanical sweeper followed by a vacuum-assisted sweeper
2. Vacuum-assisted dry (waterless) sweeper
3. Regenerative-air sweeper

Operation

Street sweeping must be done at:

1. Paved roads at job site entrance and exit locations
2. Paved areas within the job site that flow to storm drains or water bodies

Street sweeping must be done:

1. During clearing and grubbing activities
2. During earthwork activities
3. During trenching activities
4. During roadway structural section activities
5. When vehicles are entering and leaving the job site
6. After soil disturbing activities
7. After observing offsite tracking of material

Monitor paved areas and roadway within the jobsite. Street sweeping must be done:

1. Within 1 hour, if sediment or debris is observed during activities that require sweeping
2. Within 24 hours, if sediment or debris is observed during activities that do not require sweeping

At least 1 sweeper must be on the job site at all times when sweeping work is required. The sweeper must be in good working order.

Perform street sweeping to minimize dust. If dust generation is excessive or sediment pickup is ineffective, use water or a vacuum.

You may stockpile collected material on the jobsite according to the approved SWPPP. Dispose of collected material at least once per week.

Material collected during street sweeping must be removed and disposed of under Section 7-1.13, "Disposal of Material Outside the Street Right of Way," of the Standard Specifications.

Your WPCM must inspect paved roads at job site access points:

1. Daily if earthwork and other sediment or debris generating activities occur daily
2. Weekly if earthwork and other sediment or debris generating activities do not occur daily
3. When the National Weather Service predicts precipitation with a probability of at least 30 percent

The contract lump sum price paid for "Street Sweeping" includes full compensation for furnishing all labor, materials, tools, equipment, and incidentals and for doing all the work involved in street sweeping, including disposal of collected material, as shown on the plans, as specified in the Standard Specifications, these special provisions, and as directed by the Engineer.

PORTABLE CHANGEABLE MESSAGE SIGNS

The contractor shall furnish and maintain (2) changeable message signs.

GENERAL

Summary

Work includes furnishing, placing, operating, maintaining, and removing portable changeable message signs.

Comply with Section 12-3.32 "Portable Changeable Message Signs," of the Standard Specifications.

Definitions

useable shoulder area: Paved or unpaved contiguous surface adjacent to the traveled way with:

1. Sufficient weight bearing capacity to support portable changeable message sign
2. Slope not greater than 6:1 (horizontal:vertical)

Submittals

Upon request, submit a Certificate of Compliance for each portable changeable message sign under Section 6-2.03C, "Certificates of Compliance," of the Standard Specifications.

Quality Control and Assurance

Comply with the manufacturer's operating instructions for portable changeable message sign. Approaching drivers must be able to read the entire message for all phases at least twice at the posted speed limit before passing portable changeable message sign. You may use more than 1 portable changeable message sign to meet this requirement.

Only display the message shown on the plans or ordered by the Engineer or specified in these special provisions.

MATERIALS

Portable changeable message sign must have 24-hour timer control or remote control capability.

The text of the message displayed on portable changeable message sign must not scroll, or travel horizontally or vertically across the face of the message panel.

CONSTRUCTION

Continuously repeat the entire message in no more than 2 phases of at least 3 seconds per phase. If useable shoulder area is at least 15 feet wide, the displayed message on portable changeable message sign must be minimum 18-inch character height. If useable shoulder area is less than 15 feet wide, you may use a smaller message panel with minimum 12-inch character height to prevent encroachment in the traveled way.

Start displaying the message on portable changeable message sign 15 minutes before closing the lane. Place portable changeable message sign in advance of the first warning sign for:

1. Each stationary lane closure

For 5 days starting on the day of signal activation, place 1 portable changeable message sign in each direction of travel and display the message, "SIGNAL AHEAD -- PREPARE TO STOP." Place portable changeable message sign as far from the traveled way as practicable where it is legible to traffic and does not encroach on the traveled way. Place portable changeable sign before or at the crest of vertical roadway curvature where it is visible to approaching traffic. Avoid placing portable changeable message sign within or immediately after horizontal roadway curvature. Where possible, place portable changeable message sign behind guardrail or temporary railing (Type K).

Except where placed behind guardrail or temporary railing (Type K) use traffic control for shoulder closure to delineate portable changeable message sign.

Remove portable changeable message sign when not in use.

MEASUREMENT AND PAYMENT

Payment for "Portable Changeable Message Signs," shall be at the contract unit price as set forth in the proposal and shall include all labor, materials, tools, equipment, and all work necessary for the completion of this item.

Portable changeable message signs ordered by the Engineer in excess of the number shown on the plans or specified in these special provisions will be paid for as extra work under Section 4-1.05, "Changes and Extra Work," of the Standard Specifications.

PROJECT FUNDING SIGNS

The City will provide project funding signs. The Contractor shall install the provided project identification sign in accordance with TC-15 (Project Identification Sign).

Upon project completion, contractor is to also remove the sign, and return sign to Public Works. All excess material shall be disposed of by the contractor. Backfill post foundation with native material, where in soil areas. If in AC or Concrete, replace with Class 3 ASB compacted to 90%RC.

Payment for Item "Project Identification Sign," shall be at the contract unit price as set forth in the proposal, and shall include all labor, materials, tools, equipment, and all work necessary for the installation of this item

AS-BUILT DRAWINGS

Record Drawings shall be submitted before the notice of completion is filed and must include the following:

- Shall be submitted on Mylar, at least 24"x 36", and shall bear the name, address, telephone number of the firm preparing the drawings and in electronic (AutoCAD) format.
- Surveyor's/Engineers statement (with embossed or wet seal and with original signature on each sheet) shall verify the as-built drawings reflect the true conditions in the field.
- Contractor's statement (with original signature on each sheet) shall verify all construction specifications and product qualities have been met or exceeded.
- "AS-BUILT DRAWINGS" or "RECORD DRAWINGS" shall be clearly labeled on each sheet.
- The location and elevation of the benchmark referenced will be shown on the drawing.
- Corrected placement, grade, elevation and alignment of roads, water system, sewer and storm system, lighting system and appurtenances, pipe sizes, material changes, shall all be shown on as-built drawing.
- All horizontal distances shall be shown to the nearest tenth of a foot (0.1'). All elevations shall be shown to the nearest five hundredths of a foot (0.05').

Full compensation for conforming to the requirements of this section shall be considered as included in the price paid for the various contract items of work involved and no additional compensation will be made.

SAWCUT EXISTING CONCRETE AND ASPHALT PAVEMENT

Saw cutting shall conform to the provisions in Section 39-3, "Existing Asphalt Concrete," and Section 40 "Concrete Pavement," of the State Standard Specifications and these special provisions. Contractor shall provide, if necessary, a Lead Compliance Plan to the City Engineer for review prior to saw cutting existing concrete and asphalt concrete.

All concrete shall be sawcut from an existing joint. Where no joint exists in concrete on the line at which concrete is to be removed, a straight, neat cut with a power-driven saw shall be made along the line to a minimum depth of 2 inches before removing the concrete. Existing asphalt shall be sawcut to a minimum depth of 2 inches and asphalt surface that borders the demolition area shall be protected from damage.

Full compensation for conforming to the requirements of this section shall be considered as included in the price paid for the various contract items of work. The cost for saw cutting shall be

included within the associated items of work involved and no additional compensation will be made.

CLEARING AND GRUBBING

Clearing and grubbing shall conform to the provisions in Section 17-2, "Clearing and Grubbing," of the State Specifications and these Special Provisions.

Vegetation shall be cleared and grubbed only within the limits of construction shown in the plans. All existing vegetation, outside the areas to be cleared and grubbed, shall be protected from injury or damage resulting from the work of the Contractor.

Nothing herein shall be construed as relieving the Contractor of his responsibility for final clean up as provided in Section 4-1.13, "Cleanup", of the State Standard Specifications.

Payment for "Clearing and Grubbing," shall be at the contract lump sum price as set forth in the proposal and shall include all labor, materials, tools, equipment, trenching, and all work necessary for the completion of this item.

REMOVE ASPHALT CONCRETE

Remove existing Asphalt Concrete Pavement, Base and/or Subgrade to a depth established by the Engineer or as shown on the plans, and all other items necessary to complete the project. Existing asphalt shall be sawcut to provide a smooth transition per section "Sawcut Existing Concrete and Asphalt Pavement and Base Rock" of this Spec.

Nothing herein shall be construed as relieving the Contractor of his responsibility for final clean up as provided in Section 4-1.13, "Cleanup," of the State Standard Specifications.

All surplus material shall become the property of the Contractor and shall be disposed of in accordance with the provisions in Section 14-11, "Hazardous Waste and Contamination," and Section 5-1.20B(4), "Contractor-Property Owner Agreement," of the State Specifications.

Payment for Item, "Remove Asphalt Concrete," shall be at the contract square foot price as set forth in the proposal and shall include all labor, materials, tools, equipment, trenching/excavation, grading, compaction, and all work necessary for the completion of this item.

REMOVE CONCRETE

The contractor shall remove portions of concrete walk, sidewalk and/or slab as shown on the plans and called for in these specifications. Contractor shall not leave open any section for more than one week. Existing concrete shall be sawcut to provide a smooth transition per "Sawcut Existing Concrete and Asphalt Pavement." Section above.

Existing concrete shall be sawcut and removed per Section 41-11 "Removing Concrete Pavement

and Base” of the State Standard Specifications.

The quantities of Portland cement concrete sidewalk removed will be measured and paid for by the square foot.

The contract price per square foot for the removal of existing concrete shall be full compensation for furnishing all labor, materials, tools, equipment, and incidentals, for doing all work involved and no additional compensation will be allowed therefor.

Surplus material shall become the property of the Contractor and shall be disposed of at the Contractor’s expense outside the right-of-way.

Payment for “Remove Concrete” shall be at the contract square foot price as set forth in the proposal and shall include all labor, materials, tools, equipment, trenching, backfilling, and all work necessary for the completion of this item.

REMOVE CONCRETE CURB AND GUTTER

The contractor shall remove portions of the concrete curb and gutter as shown on the plans and called for in these specifications. Unless otherwise noted, all concrete shall be removed to the nearest expansion joint. Existing concrete shall be sawcut and removed per Section 41-11 “Removing Concrete Pavement and Base” of the State Standard Specifications.

The quantities of Portland cement concrete curb and gutter removed will be measured and paid for by linear feet.

Surplus material shall become the property of the Contractor and shall be disposed of at the Contractor’s expense outside the right-of-way.

Payment for “Remove Concrete Curb and Gutter” shall be at the contract lineal foot price as set forth in the proposal and shall include all labor, materials, tools, equipment, incidentals, and all work necessary for the completion of this item.

REMOVE TREE

Contractor shall remove the trees where shown on the plans. Tree removal shall conform to the provisions in Section 17-2 “Clearing and Grubbing” of the State Specifications and these Special Provisions.

Where not to remain, existing trees should be removed, and the root system thoroughly cleared of root balls and isolated roots greater than ½ inch in diameter. The amount of soil lost or disturbed with tree removal will likely vary with the extent of the root systems, moisture conditions at the time of removal, soil type and the methods of removal. The root system removal will disturb a significant quantity of soil.

Where roots are within any structural section of sidewalk, roadway, curb and gutter, the area should

be thoroughly cleared of root balls and isolated roots greater than ½ inch in diameter. The remaining hole shall be backfilled with native soil, compacted to 90% relative compaction, and sodded to match existing landscaping.

Trees, bushes, and roots that need to be trimmed or removed to excavate for the proposed sidewalk will be paid for under the bid item "Clearing and Grubbing".

Payment for "Remove Tree", shall be at the contract unit price as set forth in the proposal and shall include all labor, materials, tools, equipment, and all work necessary for the completion of this item.

ASPHALT CONCRETE

This work shall consist of applying tack coat and hot mix asphalt in accordance with the plans and these Special Provisions. One lane must remain open at all times during the asphalt concrete placement and traffic control must be provided. A full road closure may be considered per the City Engineer's approval. A detailed detour plan will then be required.

Hot Mix Asphalt – Hot Mix Asphalt shall be Type A in accordance with the provisions in Section 39, "Hot Mix Asphalt" of the State Specifications.

Hot mix asphalt shall conform to Section 39 of the State Specifications and shall be Type A HMA using PG 64-10 asphalt binder. Aggregate used in the base and intermediate layers shall be ¾" maximum, medium grading and the final wearing course should be Type A, ½" maximum, medium grading. Sections of paving to receive greater than 3" of new hot mix asphalt shall be paved in two separate lifts. Hot mix asphalt shall be spread in the number of layers indicated in Section 39-2.02C, of the Standard Specifications and shall be compacted with approved equipment as delineated in the State Specifications.

Hot mix asphalt shall be produced at an established commercial mixing plant. The aggregate and asphalt binder shall be heated and mixed thoroughly.

Prior to spreading hot mix asphalt, a paint binder of asphaltic emulsion shall be furnished and applied uniformly to contact surfaces of all cold pavement joints, curbs, gutters and to other surfaces designated by the Engineer. See section titled "Tack Coat Application" for info. Payment for this item included with AC pay item

A paint binder (tack coat) of asphaltic emulsion shall be applied to the vertical and flat areas to be surfaced in accordance with Section 39-2.01C(3)(f) of the Standard Specifications. Prime coat will not be required on base rock. Asphaltic emulsion shall be type SS1 unless otherwise permitted by the engineer.

Removal and Disposal – Existing surfacing and any other materials within the saw cut or milled lines shall be removed to a depth of approximately 0.75-feet (9-inches). Surplus material shall become the property of the Contractor and shall be disposed of at the Contractor's expense outside the right-of-way.

Thickness – The compacted thickness of hot mix asphalt shall be .25-feet (3-inches) at all locations

and shall be placed in one (1) lift or in compliance with the State Specifications. Lifts greater than 0.30 feet shall be placed in multiple lifts as per State Specification 39-2.02C.

Payment for "Asphalt Concrete," shall be at the contract square foot price as set forth in the proposal and shall include all labor, materials, tools, equipment, compaction, and all work necessary for the completion of this item.

TACK COAT APPLICATION

Immediately prior to placing the final asphalt lift, a tack coat of asphalt cement shall be applied to all edges where new asphalt is placed against existing pavement surfaces and along the outside edge of the gutter pan and in all vertical surfaces. The tack coat shall be applied uniformly at a rate of 0.02 – 0.10 gal/yd² of surface covered. The application temperature shall be a minimum 290°F to assure uniform distribution. Emulsion tack coat will not be allowed. The contractor shall make every effort to keep the gutter pan clean, and shall apply the tack coat adjacent to the gutter pan with a hand held applicator nozzle. Contractor shall thoroughly remove asphalt cement and clean any surfaces not scheduled for overlay. Apply tack coat per 39-2.01C(3)(f) of the State Specifications.

Payment for "Tack Coat Application," shall be considered as included in the price paid for various contract items of work involved and no additional compensation will be made. This includes all labor, materials, tools, equipment, and all work necessary to complete this item.

AGGREGATE BASE

The Contractor shall furnish and install aggregate base in accordance with the current City of Merced Standards, the Plans, and these Special Provisions.

Aggregate base shall Class 2 and conforms to the 3/4-inch maximum grading provisions in Section 26, "Aggregate Bases" of the State Standard Specifications. A certificate of Compliance shall be submitted to the City prior to placement. Contractor to place 6-inches per plan.

Aggregate Base shall be uniformly moisture conditioned to at least the optimum moisture content and compacted to at least 95% relative compaction, as determined by ASTM D1557.

Native subgrade material shall be moisture conditioned to at least 3% above the optimum moisture content, compacted to at least 90% but not more than 95% relative compaction as determined by ASTM D1557A.

Full compensation for "Aggregate Base," shall be paid for under the individual items for all concrete and asphalt concrete application.

Payment for "Aggregate Base" shall be considered as included in the price paid for various contract items of work involved and no additional compensation will be made. The item shall include all labor, materials, tools, equipment, compaction, and all work necessary for the completion of this item.

CONCRETE CURB AND GUTTER

The Contractor shall install concrete curb and gutter in accordance with the current City of Merced Standard SCG-1 (Sidewalk, Curb and Gutter Section) and SCG-4 (General Requirements – Sidewalk, Curb and Gutter), the Plans, and these Special Provisions. This item shall include subgrade preparation, base material, compaction, and all conditions described in the applicable City of Merced Standard Designs.

Unless the curb replacement is for an entire length of the property frontage, curb height and gutter pan width shall match existing adjacent curb dimensions.

Where curb replacement covers a full property frontage, the curb height and/or gutter pan width shall be City Standard SCG-1 dimensions. Transition curb and gutter dimensions over a distance of 3 feet from existing to City Standard SCG-1 dimensions.

Aggregate base shall be Class 2 with 4 inches minimum depth and shall conform to the provisions in Section 26 "Aggregate Bases," of the State Specifications, the Plans, and these Special Provisions. The aggregate shall conform to the 3/4-inch maximum grading specified in Section 26-1.02B, "Class 2 Aggregate Base," of the State Specifications.

The Contractor shall moisture condition subgrade to at least 3% above the optimum moisture content to a depth of 12" and compact existing sub-grade to 90%, but not more than 95%, followed by Caltrans Class 2 aggregate base uniformly moisture condition compacted to 95% relative compaction, as determined by ASTM D1557.

Payment for "Concrete Curb and Gutter," shall be at the contract linear foot price as set forth in the proposal and shall include all labor, materials, tools, equipment, backfill, aggregate base, compaction and all work necessary for the completion of this item.

CONCRETE SIDEWALK

The Contractor shall install portions of concrete sidewalk in accordance with the Plans and these Special Provisions.. This item shall include subgrade preparation, base material, compaction, and all conditions described in the applicable City of Merced Standard Designs.

Contractor to note that all concrete behind driveways shall be 6" thick. All other concrete sidewalks shall be 4". Both items shall be paid for under the "Concrete Sidewalk" line item.

Aggregate Subbase -- Aggregate subbase shall be class 3 with 4 inches minimum depth and shall conform to the provisions in Section 25 "Aggregate Subbases," of the State Specifications, the Plans, and these Special Provisions.

Aggregate Base -- See section labeled, "*Aggregate Base*" section above for requirements.

The **concrete sidewalk** shall have a minimum thickness of 4-inch, minimum 5-sack mix Type II, maximum 3-inch slump ± 1 ", match the existing adjacent concrete walk finish and in accordance

with the current City of Merced Standard SCG-4 (General Requirements – Sidewalk, Curb and Gutter), the Plans, and these Special Provisions.

The **concrete driveway sidewalk** shall have a minimum thickness of 6-inch minimum 5-sack mix, 3,000 psi with a 4-inch slump ± 1 ", match the existing adjacent concrete walk finish and existing residents driveway (cutback transition) and in accordance with the Plans, and these Special Provisions. See City Standard D-8 and D-9 for additional information.

The concrete walk shall have 1/2" felt expansion joint to be installed at 60' maximum intervals and control joints spaced every 10' on center.

The Contractor shall moisture condition subgrade to a depth of 6" and compact existing sub-grade to 90% but not more than 95%, followed by 4" thick of Caltrans Class 2 aggregate base compacted to 90% relative compaction, as determined by ASTM D1557.

This item shall include embankment fill, subgrade preparation, base material, compaction, and all conditions described in the applicable City of Merced Standard Designs.

Actual work quantities to be paid are those quantities marked and agreed upon in the field between the Engineer and the Contractor prior to demolition. No additional repairs beyond the limits marked and agreed upon in the field, as actual quantities will be paid therefor.

Payment for "Concrete Sidewalk," shall be at the contract square foot price, and item shall pay for both the 4" and 6" sections of sidewalk, as set forth in the proposal and shall include all labor, materials, tools, equipment, backfill, aggregate base, compaction and all work necessary for the completion of this item.

PAINT RED CURB

The Contractor shall paint curbs red, where shown on the drawings.

Surface shall be clean and free of debris. Contractor to pressure wash all areas prior to painting.

When applicable, contractor to submit the following for each type of coatings:

1. Certificate of Compliance
2. Materials Engineering and Testing Services (METS) sheet
3. Safety Data Sheets (SDS)

Painting shall be the full height (face and top) and full width of the curb with red traffic paint and shall be applied in conformance with the manufacturer's instructions, the provisions in Section 84, "Traffic Stripes and Pavement Markings," of the Standard Specifications, and special provisions.

Payment for Item, "Paint Red Curb," shall be at the contract unit price as set forth in the proposal, and shall include all labor, materials, tools, equipment, and all work necessary for the completion of this item.


RESTORATION

The Contractor shall restore all areas adjacent to the construction area and areas affected during construction to their preconstruction condition. Specifically included in this item are all concrete and asphalt pavement, signs, concrete curb and gutter, curb drains, driveway and alley approach, sidewalk, pavement markings, landscaping, and irrigation, fencing and all items damaged during construction.

The Contractor shall also modify any water sprinkler service that has to be moved back of the new sidewalk so that it remains functional after modification. Sprinkler head shall be at the same height as the finished adjacent surface. Contractor shall make the modifications using the same type of materials as the existing system, or materials as approved by the Engineer. Contractor shall remove sidewalk formwork, cleanup and backfill with soil and re-sod to match existing landscaping.

Payment for Item, "Restoration," shall be at the contract lump sum price as set forth in the proposal and shall include all labor, materials, tools, equipment, and all work necessary for the completion of this item.

PLANS

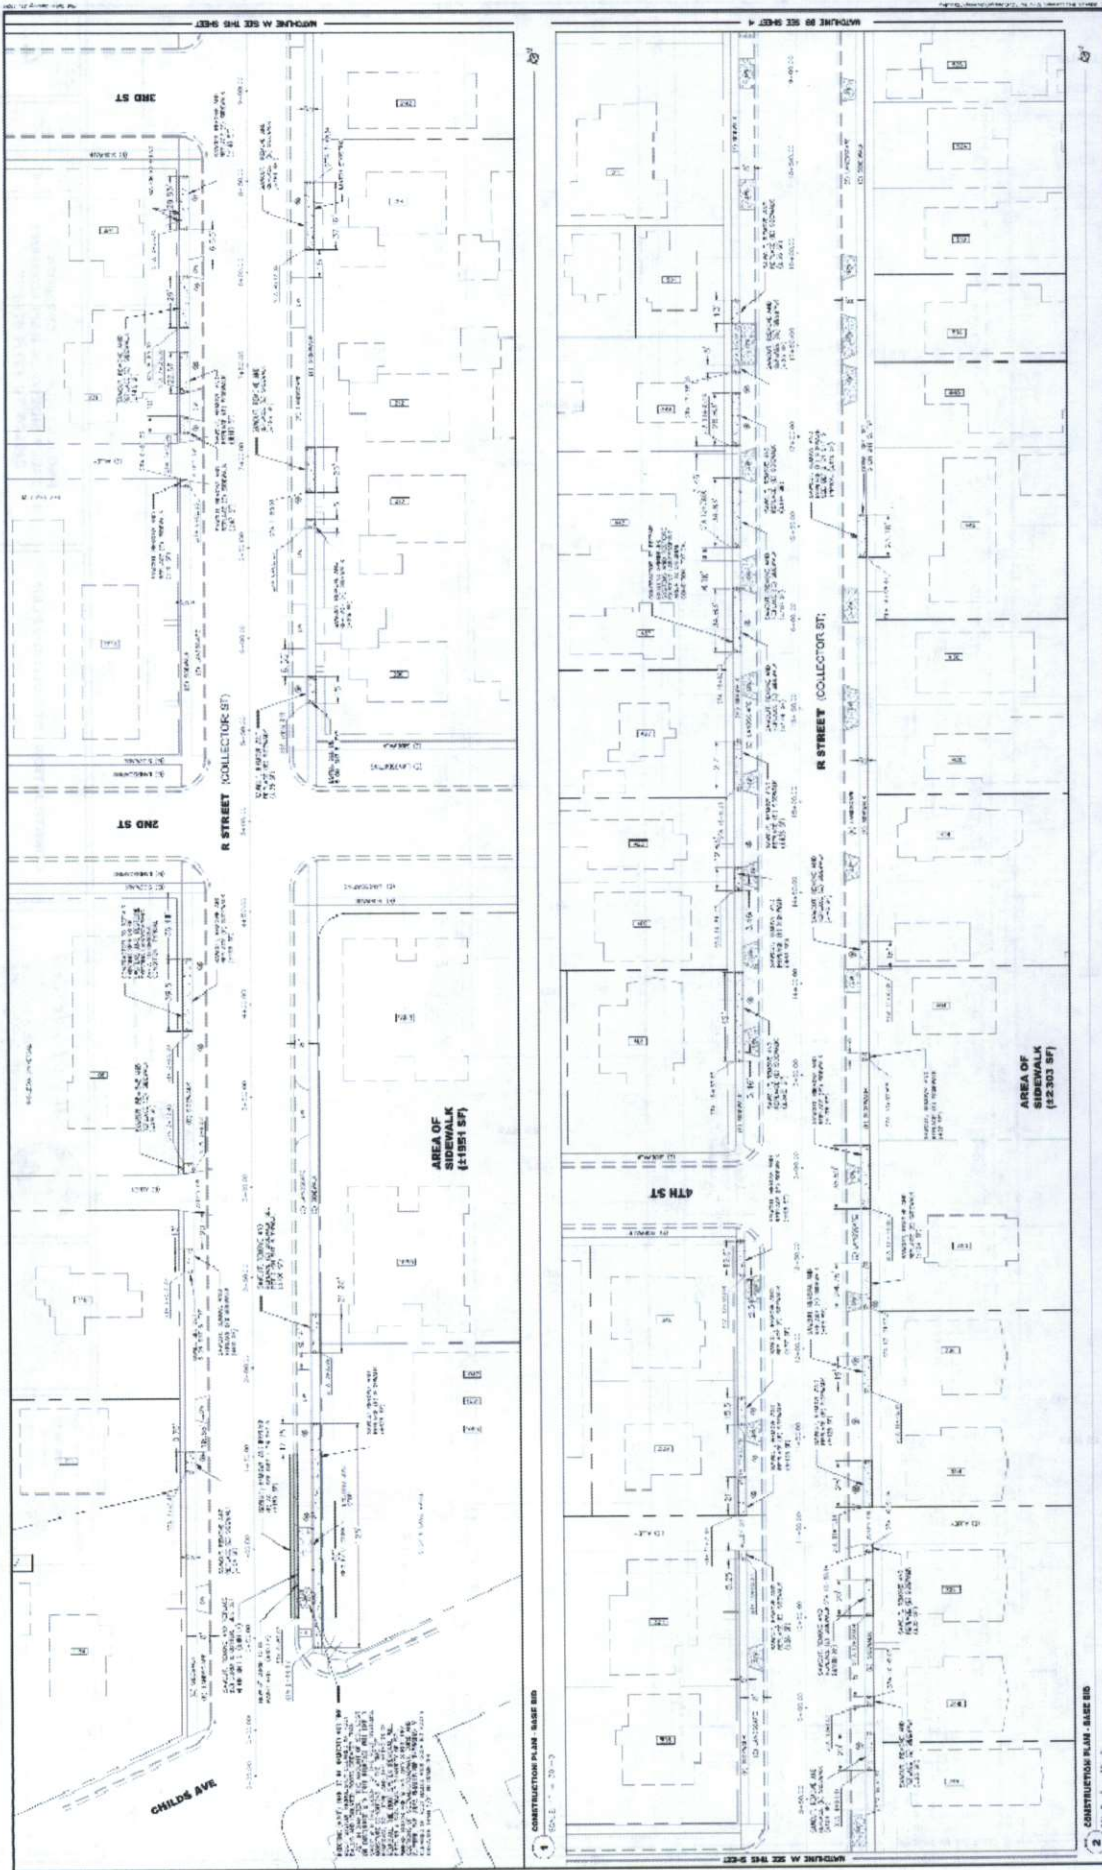

1 CONSTRUCTION PLAN - BASE BID
SCALE: 1" = 20'-0"

2 CONSTRUCTION PLAN - BASE BID
SCALE: 1" = 20'-0"

3 UNDERGROUND SERVICES ALERT
TWO DAYS BEFORE YOU DIG
CALL 811 FOR A FREE SERVICE ALERT
BEFORE YOU DIG
FOR A LIST OF PARTICIPATING UTILITIES
VISIT WWW.CALL811.COM
OR CALL 811

City of Merced
DEVELOPMENT SERVICE
SUPPORTING PROGRESS AND PROSPERITY
300 W. 1ST ST. | 209.977.3100


PROJECT NUMBER CP220024
R STREET SIDEWALK REPLACEMENT
CHILD'S TO 13TH STREET

CONSTRUCTION / DEMOLITION PLAN

DATE: 07/11/2022
SCALE: 1" = 20'-0"

3
SHEET NO. 3 OF 5




7TH STREET

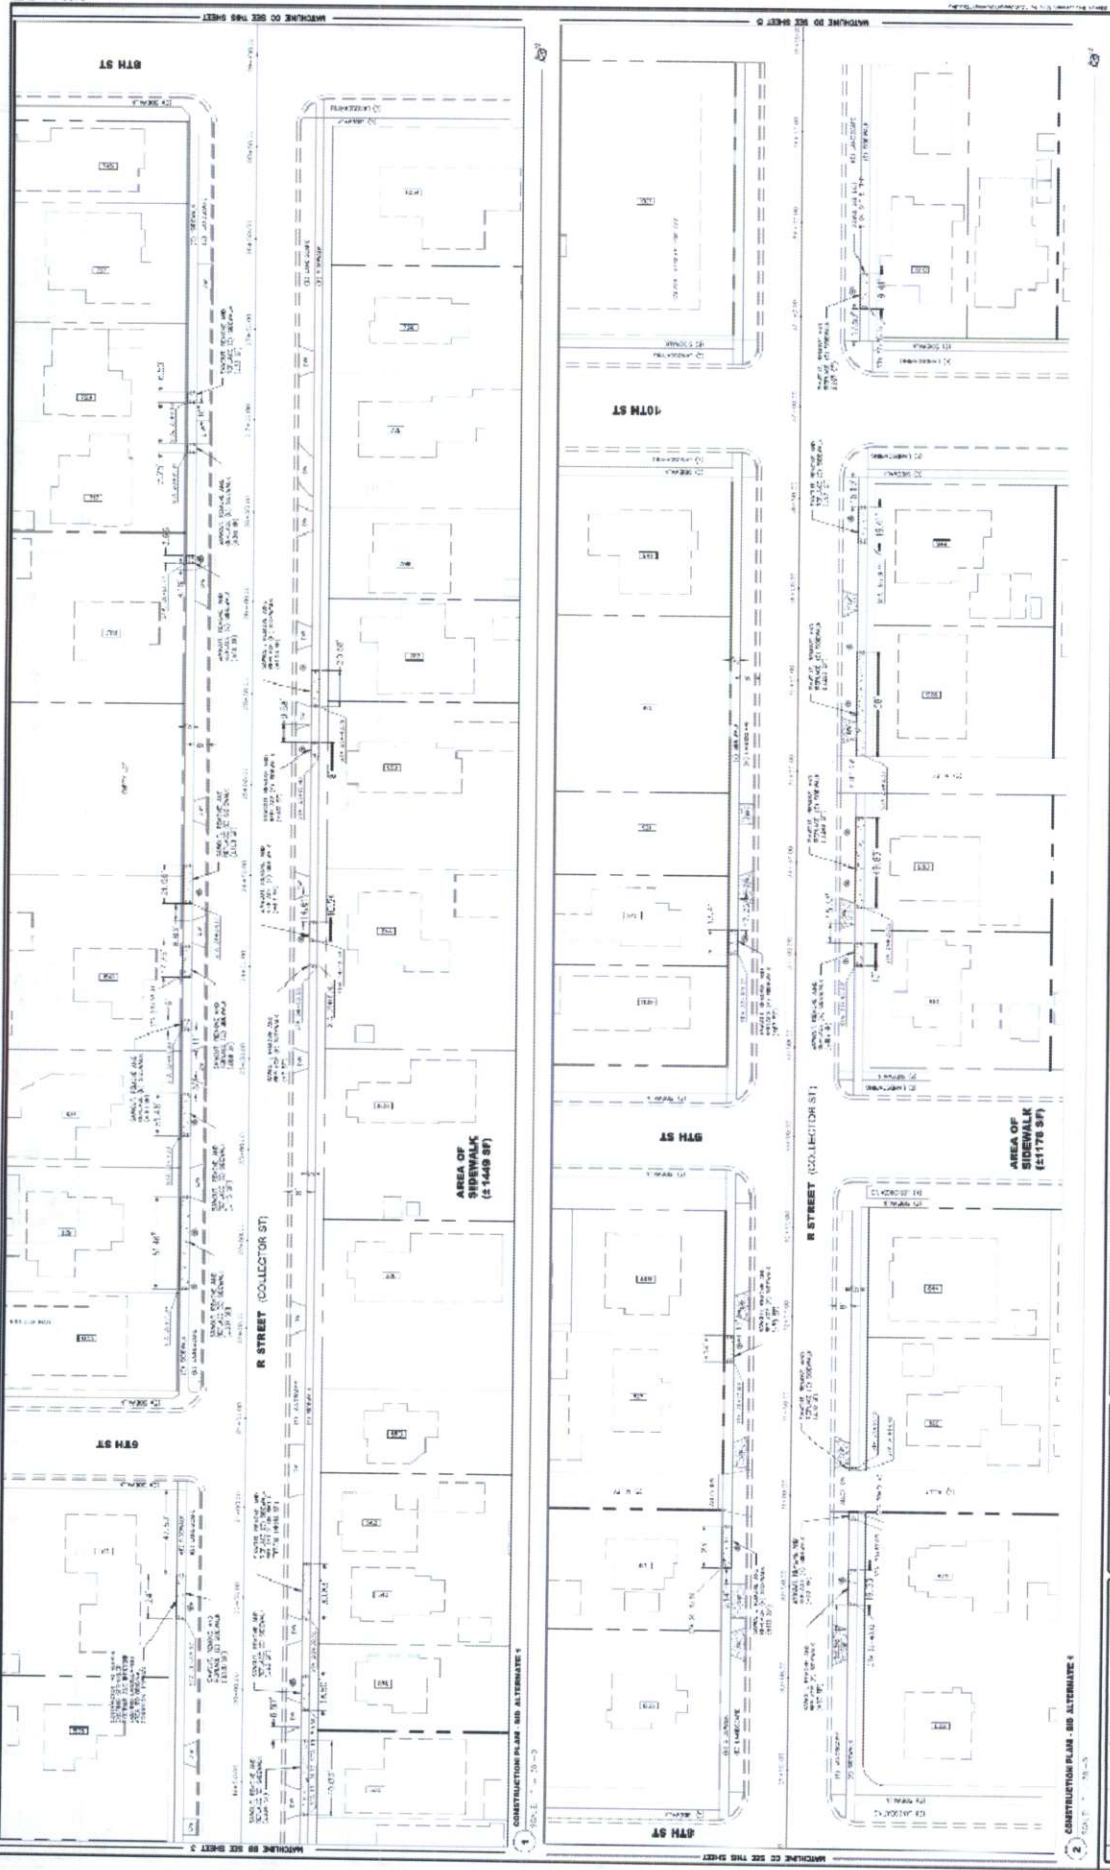

CONSTRUCTION PLAN - 800 ALTERNATIVE 4
SCALE = 1/8" = 1'-0"


CONSTRUCTION PLAN - 800 ALTERNATIVE 4
SCALE = 1/8" = 1'-0"

<p>City of Merced DEVELOPMENT SERVICE 1000 N. G ST. • MERCED, CA 95364 TEL: 209.385.3000 • FAX: 209.385.3001</p>	
<p>Underground Services Alert THREE DAYS BEFORE YOU DIG</p>	
<p>Call All Utility Companies, Gas, Electric, Water, Sewer, Cable, and Telephone Companies to mark your site before you dig. Digging without proper marking can be dangerous and costly.</p>	
<p>PROJECT NUMBER CP220024 R STREET SIDEWALK REPLACEMENT CHILDS TO 13TH STREET</p>	
<p>CONSTRUCTION / DEMOLITION PLAN</p>	
<p>DATE: 07/20/11 BY: [Signature]</p>	<p>4 SHEET 6</p>

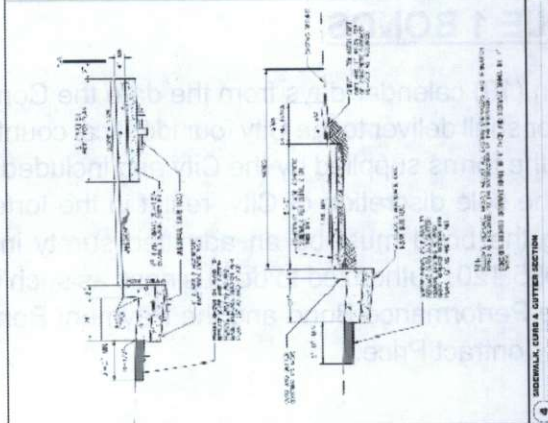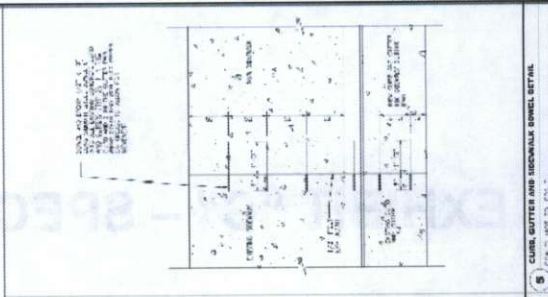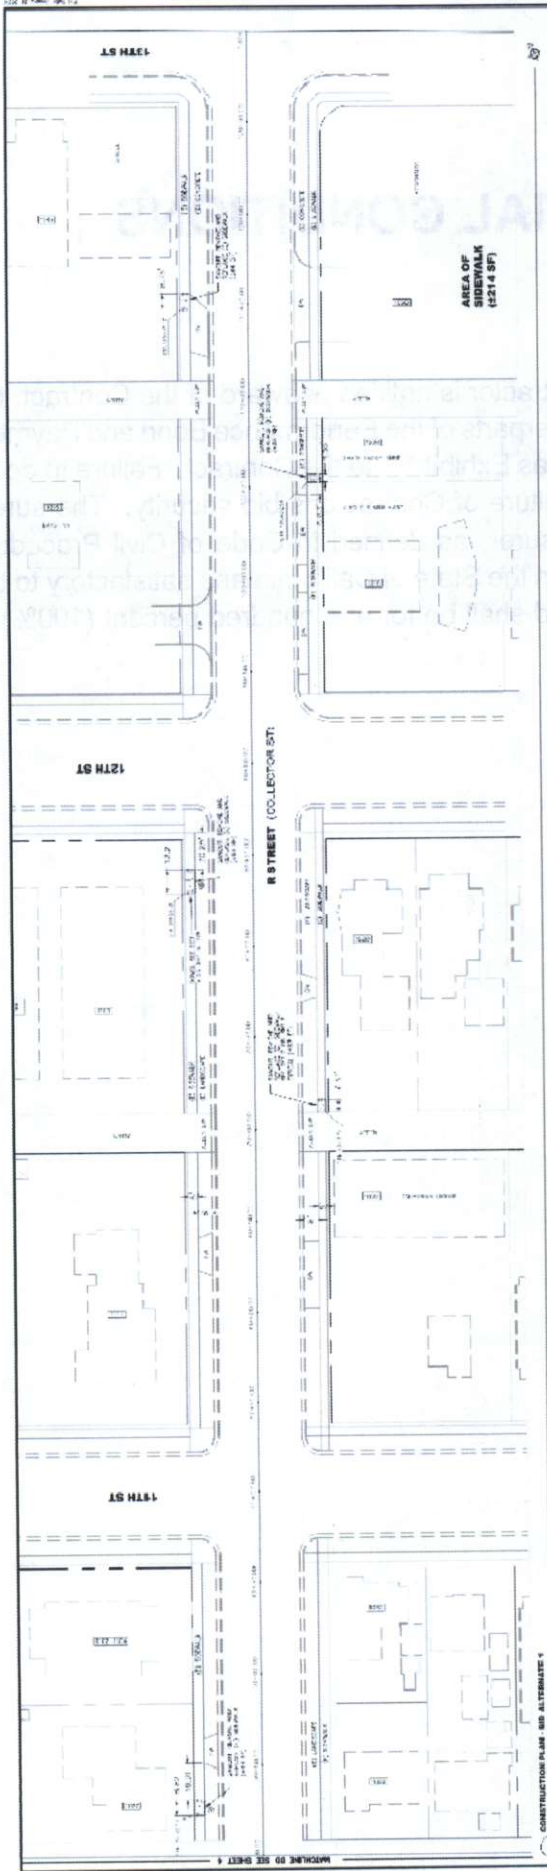

NOTES TO CONTRACTOR:

1. CONCRETE SHALL BE 5,000 PSI AND SHALL BE PLACED IN PLACE OF EXISTING SIDEWALK.
2. EXISTING SIDEWALK SHALL BE REMOVED TO A MINIMUM OF 12" BELOW FINISH GRADE.
3. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
4. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
5. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
6. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
7. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
8. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
9. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
10. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
11. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
12. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
13. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
14. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
15. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.
16. EXISTING SIDEWALK SHALL BE REPAIRED TO MATCH EXISTING SIDEWALK.

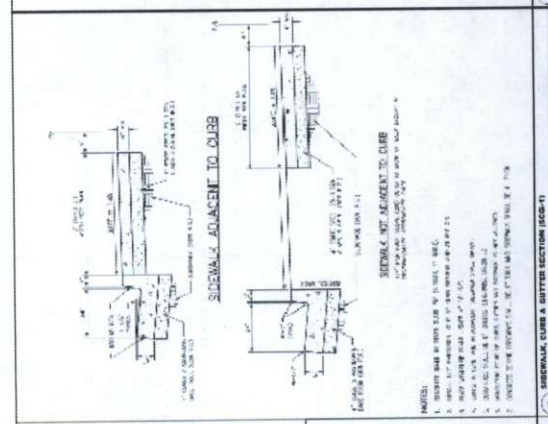

2 SIDEWALK, CURB & GUTTER SECTION (100-1)
 SCALE: 1/2" = 1'-0"

3 GENERAL REQUIREMENTS - SIDEWALK, CURB AND GUTTER (100-1)
 SCALE: 1/2" = 1'-0"

City of Merced
 Your Tax Dollars At Work!
 PROJECT FUNDED BY:
 SBA
 www.fairshare.org

Underground Service Alert
 TWO DAYS BEFORE YOU DIG

City of Merced
 DEVELOPMENT SERVICE
 875 N. MERCEDES AVENUE
 MERCED, CA 95368

PROJECT NUMBER CP220024
R STREET SIDEWALK REPLACEMENT
CHILDREN TO 13TH STREET

5

CONSTRUCTION / DEMOLITION PLAN
AND DETAILS

City of Merced
 DEVELOPMENT SERVICE
 875 N. MERCEDES AVENUE
 MERCED, CA 95368

Underground Service Alert
 TWO DAYS BEFORE YOU DIG

City of Merced
 DEVELOPMENT SERVICE
 875 N. MERCEDES AVENUE
 MERCED, CA 95368

EXHIBIT "C" – SPECIAL CONDITIONS

ARTICLE 1 BONDS

Within ten (10) calendar days from the date the Contractor is notified of award of the Contract, the Contractor shall deliver to the City four identical counterparts of the Performance Bond and Payment Bond on the forms supplied by the City and included as Exhibit "F" to the Contract. Failure to do so may, in the sole discretion of City, result in the forfeiture of Contractor's bid security. The surety supplying the bond must be an admitted surety insurer, as defined in Code of Civil Procedure Section 995.120, authorized to do business as such in the State of California and satisfactory to the City. The Performance Bond and the Payment Bond shall be for one hundred percent (100%) of the Total Contract Price.

EXHIBIT "D" – CERTIFICATION LABOR CODE SECTION 1861

I, the undersigned Contractor, am aware of the provisions of Section 3700, et seq., of the California Labor Code which require every employer to be insured against liability for Worker's Compensation or to undertake self-insurance in accordance with the provisions of the Code, and I, the undersigned Contractor, agree to and will comply with such provisions before commencing the performance of the Work on this Contract.

TOSTED ASPHALT INC
[INSERT CONTRACTOR NAME]

By: Brinn Hoiden
Signature

BRINN HOIDEN
Name (Print)

OFFICE MANAGER
Title (Print)

EXHIBIT "E" – PUBLIC WORKS CONTRACTOR REGISTRATION CERTIFICATION

Pursuant to Labor Code sections 1725.5 and 1771.1, all contractors and subcontractors that wish to bid on, be listed in a bid proposal, or enter into a contract to perform public work must be registered with the Department of Industrial Relations. See <http://www.dir.ca.gov/Public-Works/PublicWorks.html> for additional information.

No bid will be accepted nor any contract entered into without proof of the contractor's and subcontractors' current registration with the Department of Industrial Relations to perform public work.

Contractor hereby certifies that it is aware of the registration requirements set forth in Labor Code sections 1725.5 and 1771.1 and is currently registered as a contractor with the Department of Industrial Relations.¹

Name of Contractor: TOSTED ASPHALT INC

DIR Registration Number: 1000024478

DIR Registration Expiration: 04.30.2025

Small Project Exemption: Yes or No

Unless Contractor is exempt pursuant to the small project exemption, Contractor further acknowledges:

Contractor shall maintain a current DIR registration for the duration of the project.

- Contractor shall include the requirements of Labor Code sections 1725.5 and 1771.1 in its contract with subcontractors and ensure that all subcontractors are registered at the time of bid opening and maintain registration status for the duration of the project.
- Failure to submit this form or comply with any of the above requirements may result in a finding that the bid is non-responsive.

Name of Contractor TOSTED ASPHALT INC

Signature Brinn Holden

Name and Title BRINN HOLDEN, OFFICE MANAGER

Dated 03.19.2024

¹ If the Project is exempt from the contractor registration requirements pursuant to the small project exemption under Labor Code Sections 1725.5 and 1771.1, please mark "Yes" in response to "Small Project Exemption."

PERFORMANCE BOND

KNOW ALL PERSONS BY THESE PRESENTS:

THAT WHEREAS, the City of Merced (hereinafter referred to as "City") has awarded to TOSTED ASPHALT, INC., (hereinafter referred to as the "Contractor") an agreement for PROJECT NO. CP220024 (R STREET SIDWALK REPLACEMENT CHILDS TO 13TH STREET) (hereinafter referred to as the "Project").

WHEREAS, the work to be performed by the Contractor is more particularly set forth in the Contract Documents for the Project dated _____, (hereinafter referred to as "Contract Documents"), the terms and conditions of which are expressly incorporated herein by reference; and

WHEREAS, the Contractor is required by said Contract Documents to perform the terms thereof and to furnish a bond for the faithful performance of said Contract Documents.

NOW, THEREFORE, we, TOSTED ASPHALT, INC., the undersigned Contractor and THE OHIO CASUALTY INSURANCE COMPANY as Surety, a corporation organized and duly authorized to transact business under the laws of the State of California, are held and firmly bound unto the City in the sum of ONE HUNDRED SEVENTY NINE THOUSAND FIVE HUNDRED FORTY THREE 03/100 DOLLARS, (\$ 179,543.03), said sum being not less than one hundred percent (100%) of the total amount of the Contract, for which amount well and truly to be made, we bind ourselves, our heirs, executors and administrators, successors and assigns, jointly and severally, firmly by these presents.

THE CONDITION OF THIS OBLIGATION IS SUCH, that, if the Contractor, his or its heirs, executors, administrators, successors or assigns, shall in all things stand to and abide by, and well and truly keep and perform the covenants, conditions and agreements in the Contract Documents and any alteration thereof made as therein provided, on its part, to be kept and performed at the time and in the manner therein specified, and in all respects according to their intent and meaning; and shall faithfully fulfill all obligations including the one-year guarantee of all materials and workmanship; and shall indemnify and save harmless the City, its officers and agents, as stipulated in said Contract Documents, then this obligation shall become null and void; otherwise it shall be and remain in full force and effect.

As a condition precedent to the satisfactory completion of the Contract Documents, unless otherwise provided for in the Contract Documents, the above obligation shall hold good for a period of one (1) year after the acceptance of the work by City, during which time if Contractor shall fail to make full, complete, and satisfactory repair and replacements and totally protect the City from loss or damage resulting from or caused by defective materials or faulty workmanship, Surety shall undertake and faithfully fulfill all such obligations. The obligations of Surety hereunder shall continue so long as any obligation of Contractor remains. Nothing herein shall limit the City's rights or the Contractor or Surety's obligations under the Contract, law or equity, including, but not limited to, California Code of Civil Procedure section 337.15.

Whenever Contractor shall be, and is declared by the City to be, in default under the Contract Documents, the Surety shall remedy the default pursuant to the Contract Documents, or shall promptly, at the City's option:

- (1) Take over and complete the Project in accordance with all terms and conditions in the Contract Documents; or
- (2) Obtain a bid or bids for completing the Project in accordance with all terms and conditions in the Contract Documents and upon determination by Surety of the lowest responsive and responsible bidder, arrange for a Contract between such bidder, the Surety and the City, and make available as work progresses sufficient funds to pay the cost of completion of the Project, less the balance of the contract price, including other costs and damages for which Surety may be liable. The term "balance of the contract price" as used in this paragraph shall mean the total amount payable to Contractor by the City under the Contract and any modification thereto, less any amount previously paid by the City to the Contractor and any other set offs pursuant to the Contract Documents.
- (3) Permit the City to complete the Project in any manner consistent with local, California and federal law and make available as work progresses sufficient funds to pay the cost of completion of the Project, less the balance of the contract price, including other costs and damages for which Surety may be liable. The term "balance of the contract price" as used in this paragraph shall mean the total amount payable to Contractor by the City under the Contract and any modification thereto, less any amount previously paid by the City to the Contractor and any other set offs pursuant to the Contract Documents.

Surety expressly agrees that the City may reject any contractor or subcontractor which may be proposed by Surety in fulfillment of its obligations in the event of default by the Contractor.

Surety shall not utilize Contractor in completing the Project nor shall Surety accept a bid from Contractor for completion of the Project if the City, when declaring the Contractor in default, notifies Surety of the City's objection to Contractor's further participation in the completion of the Project.

The Surety, for value received, hereby stipulates and agrees that no change, extension of time, alteration or addition to the terms of the Contract Documents or to the Project to be performed thereunder shall in any way affect its obligations on this bond, and it does hereby waive notice of any such change, extension of time, alteration or addition to the terms of the Contract Documents or to the Project, including but not limited to the provisions of sections 2819 and 2845 of the California Civil Code.

IN WITNESS WHEREOF, we have hereunto set our hands and seals this 23RD day of APRIL, 2024).

(Corporate Seal)

TOSTED ASPHALT, INC.

Contractor/ Principal

By  JOSE PEREZ

Title owner

THE OHIO CASUALTY INSURANCE COMPANY

(Corporate Seal)

Surety

By



Attorney-in-Fact

Signatures of those signing for the Contractor and Surety must be notarized and evidence of corporate authority attached.

(Attach Attorney-in-Fact Certificate)

Title BRITTON CHRISTIANSEN, ATTORNEY-in-FACT

The rate of premium on this bond is \$20.57 per thousand. The total amount of premium charges, \$ 3,693.00.

(The above must be filled in by corporate attorney.)

THIS IS A REQUIRED FORM

Any claims under this bond may be addressed to:

(Name and Address of Surety)

THE OHIO CASUALTY INSURANCE COMPANY
175 BERKLEY STREET
BOSTON, MA 02116

(Name and Address of Agent or Representative for service of process in California, if different from above)

BRITTON CHRISTIANSEN
575 PRICE ST. #207, PISMO BEACH, CA 93449
949-316-1810

(Telephone number of Surety and Agent or Representative for service of process in California)

RYAN BLACKWELL

NOTE: A copy of the Power-of-Attorney authorizing the person signing on behalf of the Surety to do so must be attached hereto.

Notary Acknowledgment

A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

STATE OF CALIFORNIA
 COUNTY OF Madera

On May 23, 2024, before me, S. SKOV, Notary Public, personally appeared Jose Perez, who proved to me on the basis of satisfactory

evidence to be the person(s) whose name(s) is/are subscribed to the within instrument and acknowledged to me that he/she/they executed the same in his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the person(s), or the entity upon behalf of which the person(s) acted, executed the instrument.

I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing paragraph is true and correct.



WITNESS my hand and official seal.
S. SKOV

Signature of Notary Public

OPTIONAL

Though the information below is not required by law, it may prove valuable to persons relying on the document and could prevent fraudulent removal and reattachment of this form to another document.

CAPACITY CLAIMED BY SIGNER

- Individual
- Corporate Officer

 Title(s)

- Partner(s)
 - Limited
 - General
- Attorney-In-Fact
- Trustee(s)
- Guardian/Conservator
- Other:

Signer is representing:
 Name Of Person(s) Or Entity(ies)

DESCRIPTION OF ATTACHED DOCUMENT

 Title or Type of Document

 Number of Pages

 Date of Document

 Signer(s) Other Than Named Above



This Power of Attorney limits the acts of those named herein, and they have no authority to bind the Company except in the manner and to the extent herein stated.

Liberty Mutual Insurance Company
The Ohio Casualty Insurance Company
West American Insurance Company

Certificate No: 8210752-969577

POWER OF ATTORNEY

KNOWN ALL PERSONS BY THESE PRESENTS: That The Ohio Casualty Insurance Company is a corporation duly organized under the laws of the State of New Hampshire, that Liberty Mutual Insurance Company is a corporation duly organized under the laws of the State of Massachusetts, and West American Insurance Company is a corporation duly organized under the laws of the State of Indiana (herein collectively called the "Companies"), pursuant to and by authority herein set forth, does hereby name, constitute and appoint, Britton Christiansen; Kevin E. Vega; Philip E. Vega

all of the city of Covina state of CA each individually if there be more than one named, its true and lawful attorney-in-fact to make, execute, seal, acknowledge and deliver, for and on its behalf as surety and as its act and deed, any and all undertakings, bonds, recognizances and other surety obligations, in pursuance of these presents and shall be as binding upon the Companies as if they have been duly signed by the president and attested by the secretary of the Companies in their own proper persons.

IN WITNESS WHEREOF, this Power of Attorney has been subscribed by an authorized officer or official of the Companies and the corporate seals of the Companies have been affixed thereto this 11th day of September, 2023.



Liberty Mutual Insurance Company
The Ohio Casualty Insurance Company
West American Insurance Company

By: David M. Carey

David M. Carey, Assistant Secretary

Not valid for mortgage, note, loan, letter of credit, currency rate, interest rate or residual value guarantees.

State of PENNSYLVANIA
County of MONTGOMERY ss

On this 11th day of September, 2023 before me personally appeared David M. Carey, who acknowledged himself to be the Assistant Secretary of Liberty Mutual Insurance Company, The Ohio Casualty Company, and West American Insurance Company, and that he, as such, being authorized so to do, execute the foregoing instrument for the purposes therein contained by signing on behalf of the corporations by himself as a duly authorized officer.

IN WITNESS WHEREOF, I have hereunto subscribed my name and affixed my notarial seal at Plymouth Meeting, Pennsylvania, on the day and year first above written.



Commonwealth of Pennsylvania - Notary Seal
Teresa Pastella, Notary Public
Montgomery County
My commission expires March 28, 2025
Commission number 1126044
Member, Pennsylvania Association of Notaries

By: Teresa Pastella

Teresa Pastella, Notary Public

This Power of Attorney is made and executed pursuant to and by authority of the following By-laws and Authorizations of The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company which resolutions are now in full force and effect reading as follows:

ARTICLE IV - OFFICERS: Section 12. Power of Attorney.

Any officer or other official of the Corporation authorized for that purpose in writing by the Chairman or the President, and subject to such limitation as the Chairman or the President may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Corporation to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Corporation by their signature and execution of any such instruments and to attach thereto the seal of the Corporation. When so executed, such instruments shall be as binding as if signed by the President and attested to by the Secretary. Any power or authority granted to any representative or attorney-in-fact under the provisions of this article may be revoked at any time by the Board, the Chairman, the President or by the officer or officers granting such power or authority.

ARTICLE XIII - Execution of Contracts: Section 5. Surety Bonds and Undertakings.

Any officer of the Company authorized for that purpose in writing by the chairman or the president, and subject to such limitations as the chairman or the president may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Company by their signature and execution of any such instruments and to attach thereto the seal of the Company. When so executed such instruments shall be as binding as if signed by the president and attested by the secretary.

Certificate of Designation - The President of the Company, acting pursuant to the Bylaws of the Company, authorizes David M. Carey, Assistant Secretary to appoint such attorneys-in-fact as may be necessary to act on behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations.

Authorization - By unanimous consent of the Company's Board of Directors, the Company consents that facsimile or mechanically reproduced signature of any assistant secretary of the Company, wherever appearing upon a certified copy of any power of attorney issued by the Company in connection with surety bonds, shall be valid and binding upon the Company with the same force and effect as though manually affixed.

I, Renee C. Llewellyn, the undersigned, Assistant Secretary, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company do hereby certify that the original power of attorney of which the foregoing is a full, true and correct copy of the Power of Attorney executed by said Companies, is in full force and effect and has not been revoked.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the seals of said Companies this 23RD day of APRIL, 2024.



By: Renee C. Llewellyn

Renee C. Llewellyn, Assistant Secretary

For bond and/or Power of Attorney (POA) verification inquiries, please call 610-832-8240 or email HOSUR@libertymutual.com.

CALIFORNIA ALL-PURPOSE ACKNOWLEDGMENT

CIVIL CODE § 1189

A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

State of California)
County of LOS ANGELES)


On APR 23 2024 before me, PHILIP VEGA, NOTARY PUBLIC
Date Here Insert Name and Title of the Officer

personally appeared BRITTON CHRISTIANSEN
Name(s) of Signer(s)

who proved to me on the basis of satisfactory evidence to be the person(s) whose name(s) is/are subscribed to the within instrument and acknowledged to me that he/she/they executed the same in his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the person(s), or the entity upon behalf of which the person(s) acted, executed the instrument.

I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing paragraph is true and correct.

WITNESS my hand and official seal.



Signature [Handwritten Signature]
Signature of Notary Public

Place Notary Seal Above

OPTIONAL

Though this section is optional, completing this information can deter alteration of the document or fraudulent reattachment of this form to an unintended document.

Description of Attached Document

Title or Type of Document: _____ Document Date: _____

Number of Pages: _____ Signer(s) Other Than Named Above: _____

Capacity(ies) Claimed by Signer(s)

Signer's Name: _____

Corporate Officer — Title(s): _____

Partner — Limited General

Individual Attorney in Fact

Trustee Guardian or Conservator

Other: _____

Signer Is Representing: _____

Signer's Name: _____

Corporate Officer — Title(s): _____

Partner — Limited General

Individual Attorney in Fact

Trustee Guardian or Conservator

Other: _____

Signer Is Representing: _____

PREMIUM IS INCLUDED IN PERFORMANCE BOND.

PAYMENT BOND

KNOW ALL MEN BY THESE PRESENTS That

WHEREAS, the City of Merced (hereinafter designated as the "City"), by action taken or a resolution passed APRIL 15TH, 2024 has awarded to TOSTED ASPHALT, INC. hereinafter designated as the "Principal," a contract for the work described as follows:

PROJECT NO. CP220024 (R STREET SIDWALK REPLACEMENT CHILDS TO 13TH STREET) (the "Project"); and

WHEREAS, the work to be performed by the Principal is more particularly set forth in the Contract Documents for the Project dated _____ ("Contract Documents"), the terms and conditions of which are expressly incorporated by reference; and

WHEREAS, said Principal is required to furnish a bond in connection with said contract; providing that if said Principal or any of its Subcontractors shall fail to pay for any materials, provisions, provender, equipment, or other supplies used in, upon, for or about the performance of the work contracted to be done, or for any work or labor done thereon of any kind, or for amounts due under the Unemployment Insurance Code or for any amounts required to be deducted, withheld, and paid over to the Employment Development Department from the wages of employees of said Principal and its Subcontractors with respect to such work or labor the Surety on this bond will pay for the same to the extent hereinafter set forth.

NOW THEREFORE, we, the Principal and THE OHIO CASUALTY INSURANCE COMPANY as Surety, are held and firmly bound unto the City in the penal sum of ONE HUNDRED SEVENTY NINE THOUSAND FIVE HUNDRED FORTY THREE 03/100 Dollars (\$ 179,543.03) lawful money of the United States of America, for the payment of which sum well and truly to be made, we bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

THE CONDITION OF THIS OBLIGATION IS SUCH that if said Principal, his or its subcontractors, heirs, executors, administrators, successors or assigns, shall fail to pay any of the persons named in Section 9100 of the Civil Code, fail to pay for any materials, provisions or other supplies, used in, upon, for or about the performance of the work contracted to be done, or for any work or labor thereon of any kind, or amounts due under the Unemployment Insurance Code with respect to work or labor performed under the contract, or for any amounts required to be deducted, withheld, and paid over to the Employment Development Department or Franchise Tax Board from the wages of employees of the contractor and his subcontractors pursuant to Section 18663 of the Revenue and Taxation Code, with respect to such work and labor the Surety or Sureties will pay for the same, in an amount not exceeding the sum herein above specified.

This bond shall inure to the benefit of any of the persons named in Section 9100 of the Civil Code so as to give a right of action to such persons or their assigns in any suit brought upon this bond.

It is further stipulated and agreed that the Surety on this bond shall not be exonerated or released from the obligation of this bond by any change, extension of time for performance, addition, alteration or modification in, to, or of any contract, plans, specifications, or agreement pertaining or relating to any scheme or work of improvement herein above described, or pertaining or relating to the furnishing of labor, materials, or equipment therefore, nor by any change or modification of any terms of payment or extension of the time for any payment pertaining or relating to any scheme or work of improvement herein above described, nor by any rescission or


attempted rescission of the contract, agreement or bond, nor by any conditions precedent or subsequent in the bond attempting to limit the right of recovery of claimants otherwise entitled to recover under any such contract or agreement or under the bond, nor by any fraud practiced by any person other than the claimant seeking to recover on the bond and that this bond be construed most strongly against the Surety and in favor of all persons for whose benefit such bond is given, and under no circumstances shall Surety be released from liability to those for whose benefit such bond has been given, by reason of any breach of contract between the owner or City and original contractor or on the part of any obligee named in such bond, but the sole conditions of recovery shall be that claimant is a person described in Section 9100 of the Civil Code, and has not been paid the full amount of his claim and that Surety does hereby waive notice of any such change, extension of time, addition, alteration or modification herein mentioned and the provisions of sections 2819 and 2845 of the California Civil Code.

IN WITNESS WHEREOF, we have hereunto set our hands and seals this 23RD day of APRIL, 2024.

(Corporate Seal)

TOSTED ASPHALT, INC.

Contractor/ Principal


By  JOSE PEREZ

Title OWNER

(Corporate Seal)

THE OHIO CASUALTY INSURANCE COMPANY

Surety

By  Attorney-in-Fact

Title BRITTON CHRISTIANSEN, ATTORNEY-in-FACT

Signatures of those signing for the Contractor and Surety must be notarized and evidence of corporate authority attached. A Power-of-Attorney authorizing the person signing on behalf of the Surety to do so must be attached hereto.

NOTE: A copy of the Power-of-Attorney authorizing the person signing on behalf of the Surety to do so must be attached hereto.

Notary Acknowledgment

A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

STATE OF CALIFORNIA
 COUNTY OF Madera

On May 23, 2024, before me, S Skov, Notary Public, personally appeared Jose Perez, who proved to me on the basis of satisfactory

evidence to be the person(s) whose name(s) is/are subscribed to the within instrument and acknowledged to me that he/she/they executed the same in his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the person(s), or the entity upon behalf of which the person(s) acted, executed the instrument.

I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing paragraph is true and correct.



WITNESS my hand and official seal.

S Skov

Signature of Notary Public

OPTIONAL

Though the information below is not required by law, it may prove valuable to persons relying on the document and could prevent fraudulent removal and reattachment of this form to another document.

CAPACITY CLAIMED BY SIGNER

- Individual
- Corporate Officer

 Title(s)

- Partner(s)
 - Limited
 - General
- Attorney-In-Fact
- Trustee(s)
- Guardian/Conservator
- Other:

Signer is representing:
 Name Of Person(s) Or Entity(ies)

DESCRIPTION OF ATTACHED DOCUMENT

 Title or Type of Document

 Number of Pages

 Date of Document

 Signer(s) Other Than Named Above



This Power of Attorney limits the acts of those named herein, and they have no authority to bind the Company except in the manner and to the extent herein stated.

Liberty Mutual Insurance Company
The Ohio Casualty Insurance Company
West American Insurance Company

Certificate No: 8210752-969577

POWER OF ATTORNEY

KNOWN ALL PERSONS BY THESE PRESENTS: That The Ohio Casualty Insurance Company is a corporation duly organized under the laws of the State of New Hampshire, that Liberty Mutual Insurance Company is a corporation duly organized under the laws of the State of Massachusetts, and West American Insurance Company is a corporation duly organized under the laws of the State of Indiana (herein collectively called the "Companies"), pursuant to and by authority herein set forth, does hereby name, constitute and appoint, Britton Christiansen; Kevin E. Vega; Philip E. Vega

all of the city of Covina state of CA each individually if there be more than one named, its true and lawful attorney-in-fact to make, execute, seal, acknowledge and deliver, for and on its behalf as surety and as its act and deed, any and all undertakings, bonds, recognizances and other surety obligations, in pursuance of these presents and shall be as binding upon the Companies as if they have been duly signed by the president and attested by the secretary of the Companies in their own proper persons.

IN WITNESS WHEREOF, this Power of Attorney has been subscribed by an authorized officer or official of the Companies and the corporate seals of the Companies have been affixed thereto this 11th day of September, 2023.



Liberty Mutual Insurance Company
The Ohio Casualty Insurance Company
West American Insurance Company

By: David M. Carey, Assistant Secretary

Not valid for mortgage, note, loan, letter of credit, currency rate, interest rate or residual value guarantees.

For bond and/or Power of Attorney (POA) verification inquiries, please call 610-832-8240 or email HOSUR@libertymutual.com.

State of PENNSYLVANIA
County of MONTGOMERY ss

On this 11th day of September, 2023 before me personally appeared David M. Carey, who acknowledged himself to be the Assistant Secretary of Liberty Mutual Insurance Company, The Ohio Casualty Company, and West American Insurance Company, and that he, as such, being authorized so to do, execute the foregoing instrument for the purposes therein contained by signing on behalf of the corporations by himself as a duly authorized officer.

IN WITNESS WHEREOF, I have hereunto subscribed my name and affixed my notarial seal at Plymouth Meeting, Pennsylvania, on the day and year first above written.



Commonwealth of Pennsylvania - Notary Seal
Teresa Pastella, Notary Public
Montgomery County
My commission expires March 28, 2025
Commission number 1126044
Member, Pennsylvania Association of Notaries

By: Teresa Pastella, Notary Public

This Power of Attorney is made and executed pursuant to and by authority of the following By-laws and Authorizations of The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company which resolutions are now in full force and effect reading as follows:

ARTICLE IV - OFFICERS: Section 12. Power of Attorney.

Any officer or other official of the Corporation authorized for that purpose in writing by the Chairman or the President, and subject to such limitation as the Chairman or the President may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Corporation to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact, subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Corporation by their signature and execution of any such instruments and to attach thereto the seal of the Corporation. When so executed, such instruments shall be as binding as if signed by the President and attested to by the Secretary. Any power or authority granted to any representative or attorney-in-fact under the provisions of this article may be revoked at any time by the Board, the Chairman, the President or by the officer or officers granting such power or authority.

ARTICLE XIII - Execution of Contracts: Section 5. Surety Bonds and Undertakings.

Any officer of the Company authorized for that purpose in writing by the chairman or the president, and subject to such limitations as the chairman or the president may prescribe, shall appoint such attorneys-in-fact, as may be necessary to act in behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations. Such attorneys-in-fact subject to the limitations set forth in their respective powers of attorney, shall have full power to bind the Company by their signature and execution of any such instruments and to attach thereto the seal of the Company. When so executed such instruments shall be as binding as if signed by the president and attested by the secretary.

Certificate of Designation - The President of the Company, acting pursuant to the Bylaws of the Company, authorizes David M. Carey, Assistant Secretary to appoint such attorneys-in-fact as may be necessary to act on behalf of the Company to make, execute, seal, acknowledge and deliver as surety any and all undertakings, bonds, recognizances and other surety obligations.

Authorization - By unanimous consent of the Company's Board of Directors, the Company consents that facsimile or mechanically reproduced signature of any assistant secretary of the Company, wherever appearing upon a certified copy of any power of attorney issued by the Company in connection with surety bonds, shall be valid and binding upon the Company with the same force and effect as though manually affixed.

I, Renee C. Llewellyn, the undersigned, Assistant Secretary, The Ohio Casualty Insurance Company, Liberty Mutual Insurance Company, and West American Insurance Company do hereby certify that the original power of attorney of which the foregoing is a full, true and correct copy of the Power of Attorney executed by said Companies, is in full force and effect and has not been revoked.

IN TESTIMONY WHEREOF, I have hereunto set my hand and affixed the seals of said Companies this 23RD day of APRIL, 2024.



By: Renee C. Llewellyn, Assistant Secretary

CALIFORNIA ALL-PURPOSE ACKNOWLEDGMENT

CIVIL CODE § 1189


A notary public or other officer completing this certificate verifies only the identity of the individual who signed the document to which this certificate is attached, and not the truthfulness, accuracy, or validity of that document.

State of California)
County of LOS ANGELES)
On APR 23 2024 before me, PHILIP VEGA, NOTARY PUBLIC
Date Here Insert Name and Title of the Officer
personally appeared BRITTON CHRISTIANSEN
Name(s) of Signer(s)

who proved to me on the basis of satisfactory evidence to be the person(s) whose name(s) is/are subscribed to the within instrument and acknowledged to me that he/she/they executed the same in his/her/their authorized capacity(ies), and that by his/her/their signature(s) on the instrument the person(s), or the entity upon behalf of which the person(s) acted, executed the instrument.

I certify under PENALTY OF PERJURY under the laws of the State of California that the foregoing paragraph is true and correct.

WITNESS my hand and official seal.



Signature [Signature]
Signature of Notary Public

Place Notary Seal Above

OPTIONAL

Though this section is optional, completing this information can deter alteration of the document or fraudulent reattachment of this form to an unintended document.

Description of Attached Document

Title or Type of Document: _____ Document Date: _____
Number of Pages: _____ Signer(s) Other Than Named Above: _____

Capacity(ies) Claimed by Signer(s)

Signer's Name: _____
 Corporate Officer — Title(s): _____
 Partner — Limited General
 Individual Attorney in Fact
 Trustee Guardian or Conservator
 Other: _____
Signer Is Representing: _____

Signer's Name: _____
 Corporate Officer — Title(s): _____
 Partner — Limited General
 Individual Attorney in Fact
 Trustee Guardian or Conservator
 Other: _____
Signer Is Representing: _____

This Endorsement Changes The Policy. Please Read It Carefully

BUSINESS AUTO COVERAGE EXPANSION ENDORSEMENT

This endorsement modifies insurance provided by the following:

BUSINESS AUTO COVERAGE FORM

With respect to coverage provided by this endorsement, the provisions of the COVERAGE FORM apply unless modified by the endorsement.

A. Newly Acquired or Formed

Organizations, Employee Hired Car Liability and Blanket Additional Insured Status for Certain Entities.

Item 1. **Who is an Insured** of Paragraph A. **Coverage** under **SECTION II – COVERED AUTOS LIABILITY COVERAGE** is amended to add:

- d. Any organization you newly acquire or form, other than a partnership, joint venture or limited liability company, and over which you maintain ownership of a majority interest (greater than 50%), will qualify as a Named Insured; however,
- (1) coverage under this provision is afforded only until the 180th day after you acquire or form the organization or the end of the policy period, whichever is earlier;
 - (2) coverage does not apply to "bodily injury", "property damage" or "covered pollution cost or expense" that results from an "accident" which occurred before you acquired or formed the organization; and
 - (3) coverage does not apply if there is other similar insurance available to that organization, or if similar insurance would have been available but for its termination or the exhaustion of its limits of insurance.

This insurance does not apply if coverage for the newly acquired or formed organization is excluded either by the provisions of this coverage form or by endorsement.

- e. An "employee" of yours is an "insured" while operating an "auto" hired or rented under a contract or agreement in that "employee's" name, with your permission, while performing duties related to the conduct of your business.
- f. Any person or organization you are required by written contract or agreement to name as an additional "insured", but only with respect to liability created in whole or in part by such agreement.

B. Increase Of Loss Earnings Payment

Subpart (4) of a. **Supplementary Payments** of Item 2. **Coverage Extensions** of Paragraph A. **Coverage** under **SECTION II – COVERED AUTOS LIABILITY COVERAGE** is amended to read:

- (4) We will pay reasonable expenses incurred by the "insured" at our request, including actual loss of earnings up to \$1,000 per day because of time off from work.

C. Fellow Employee Injured By Covered Auto You Own Or Hire

Item 5. **Fellow Employee** of Paragraph B. **Exclusions** under **SECTION II – COVERED AUTOS LIABILITY COVERAGE** is amended to add:

This exclusion does not apply if the "bodily injury" results from the use of a covered "auto" you own or hire. Such coverage as is afforded by this provision is excess over any other collectible insurance.

D. Limited Automatic Towing Coverage

Item 2. **Towing**, of Paragraph A. **Coverage**, under **SECTION III – PHYSICAL DAMAGE COVERAGE** is amended to read:

2. Towing

We will pay for towing and labor costs each time that a covered "auto" is disabled. All labor must be performed at the place of disablement of the covered "auto".

- a. The limit for towing and labor for each disablement is \$500;
- b. No deductible applies to this coverage.

E. Item 3. Glass Breakage – Hitting A Bird Or Animal – Falling Objects or Missiles of Paragraph A. **Coverage** under **SECTION III – PHYSICAL DAMAGE COVERAGE**, is amended to add:

Glass Repair Coverage

We will waive the Comprehensive deductible for Glass, if one is indicated on your covered "auto", for glass repairs. We will repair at no cost to you, any glass that can be repaired without replacement, provided the "loss" arises from a covered Comprehensive "loss" to your "auto".

F. Increase Of Transportation Expense Coverage

Subpart a. **Transportation Expenses** of Item 4. **Coverage Extensions** of Paragraph A. **Coverage** under **SECTION III – PHYSICAL DAMAGE COVERAGE** is amended to read:

a. Transportation Expenses

We will pay up to \$50 per day to a maximum of \$1,000 for temporary transportation expense incurred by you because of the total theft of a covered "auto" of the private passenger type. We will pay only for those covered "autos" for which you carry either Comprehensive or Specified Causes of Loss Coverage or Theft Coverage. We will pay for temporary transportation expenses incurred during the period beginning 48 hours after the theft and ending, regardless of the policy's expiration, when the covered "auto" is returned to use or we pay for its "loss".

G. "Personal Effects" Coverage

Item 4. **Coverage Extensions** of Paragraph A. **Coverage**, under **SECTION III - PHYSICAL DAMAGE COVERAGE**, is amended to add:

"Personal Effects" Coverage

We will pay actual cash value for "loss" to "personal effects" of the "insured" while in a covered "auto" subject to a maximum limit of \$2,500 per "loss", for that covered "auto" caused by the same "accident". No deductible will apply to this coverage.

H. "Downtime Loss" Coverage

Item 4. **Coverage Extensions**, of Paragraph A. **Coverage**, under **SECTION III. PHYSICAL DAMAGE COVERAGE**, is amended to add:

"Downtime Loss" Coverage

We will pay any resulting "downtime loss" expenses you sustain as a result of a covered physical damage "loss" to a covered "auto" up to a maximum of \$100 per day, for a maximum of 30 days for the same physical damage "loss", subject to the following conditions:

- a. We will provide "downtime loss" beginning on the 5th day after we have given you our agreement to pay for repairs to a covered "auto" and you have given the repair facility your authorization to make repairs;
- b. Coverage for "downtime loss" expenses will end when any of the following occur:
 - (1) You have a spare or reserve "auto" available to you to continue your operations.
 - (2) You purchase a replacement "auto".
 - (3) Repairs to your covered "auto" have been completed by the repair facility and they determine the covered "auto" is road-worthy.
 - (4) You reach the 30 day maximum coverage.

- I. **Item 4. Coverage Extensions**, of Paragraph **A. Coverage**, under **SECTION III. PHYSICAL DAMAGE COVERAGE**, is amended to add:

We will pay any resulting rental reimbursement expenses incurred by you for a rental of an "auto" because of "loss" to a covered "auto" up to a maximum of \$100 per day, for a maximum of 30 days for the same physical damage "loss", subject to the following conditions:

- a. We will provide rental reimbursement incurred during the policy period beginning 24 hours after the "loss" and ending, regardless of the policy expiration, with the number of days reasonably required to repair or replace the covered "auto". If the "loss" is caused by theft, this number of days is the number of days it takes to locate the covered "auto" and return it to you or the number of days it takes for the claim to be settled, whichever comes first.
- b. Our payment is limited to necessary and actual expenses incurred.
- c. This coverage does not apply while there are spare or reserve "autos" available to you for your operations.
- d. If a "loss" results from the total theft of a covered "auto" of the private passenger type, we will pay under this coverage only that amount of your rental reimbursement expenses which is not already provided for under the Physical Damage Coverage Extension.

J. **"Personal Effects" Exclusion**

Paragraph **B. Exclusions** under **SECTION III – PHYSICAL DAMAGE COVERAGE**, is amended to add:

"Personal Effects" Exclusion

We will not pay for "loss" to "personal effects" of any of the following:

- a. Accounts, bills, currency, deeds, evidence of debt, money, notes, securities or commercial paper or other documents of value.
- b. Bullion, gold, silver, platinum, or other precious alloys or metals; furs or fur garments; jewelry; watches; precious or semi-precious stones.
- c. Paintings, statuary and other works of art.

- d. Contraband or property in the course of illegal transportation or trade.
- e. "Loss" caused by theft, unless there is evidence of forced entry into the covered "auto" and a police report is filed.

K. **Accidental Airbag Discharge Coverage**

Item **3.a.** of Paragraph **B. Exclusions** under **SECTION III – PHYSICAL DAMAGE COVERAGE** is amended to read:

- a. Wear and tear, freezing, mechanical or electrical breakdown. The exclusion relating to mechanical break-down does not apply to the accidental discharge of an air bag.

L. **Loan or Lease Gap Coverage**

Paragraph **C. Limit Of Insurance** under **SECTION III – PHYSICAL DAMAGE COVERAGE** is amended to add:

If a covered "auto" is owned or leased and if we provide Physical Damage Coverage on it, we will pay, in the event of a covered total "loss", any unpaid amount due on the lease or loan for a covered "auto", less:

- a. The amount paid under the Physical Damage Coverage Section of the policy; and
- b. Any:
 - (1) Overdue lease or loan payments including penalties, interest or other charges resulting from overdue payments at the time of the "loss";
 - (2) Financial penalties imposed under a lease for excessive use, abnormal wear and tear or high mileage;
 - (3) Costs for extended warranties, Credit Life Insurance, Health, Accident or Disability Insurance purchased with the loan or lease;
 - (4) Security deposits not refunded by the lessor; and
 - (5) Carry-over balances from previous loans or leases

M. Aggregate Deductible

Paragraph D. **Deductible** under **SECTION III – PHYSICAL DAMAGE COVERAGE** is amended to add:

Regardless of the number of covered "autos" involved in the same "loss", only one deductible will apply to that "loss". If the deductible amounts vary by "autos", then only the highest applicable deductible will apply to that "loss".

N. Diminishing Deductible

Paragraph D. **Deductible** under **SECTION III – PHYSICAL DAMAGE COVERAGE** is amended to add:

Any deductible will be reduced by the percentage indicated below on the first "loss" reported during the corresponding policy period:

Loss Free Policy Periods With the Expansion Endorsement	Deductible Reduction on the first "loss"
1	0%
2	25%
3	50%
4	75%
5	100%

If we pay a Physical Damage "loss" during the policy period under any BUSINESS AUTO COVERAGE FORM you have with us, your deductible stated in the Declarations page of each such COVERAGE FORM will not be reduced on any subsequent claims during the remainder of your policy period and your deductible reduction will revert back to 0% for each such COVERAGE FORM if coverage is renewed.

O. Knowledge of Loss and Notice To Us

Subsection a. of Item 2. **Duties In the Event of Accident, Claim, Suit or Loss** of Paragraph A. **Loss Conditions** under **SECTION IV -- BUSINESS AUTO CONDITIONS** is amended to add:

However, prompt notice of the "accident", claim, "suit" or "loss" to us or our authorized representative only applies after the "accident", claim, "suit" or "loss" is known to:

- (1) You, if you are an individual;
- (2) A partner, if you are a partnership;

- (3) An "executive officer" or director, if you are a corporation;
- (4) A manager or member, if you are a limited liability company;
- (5) Your insurance manager; or
- (6) Your legal representative.

P. Waiver Of Subrogation For Auto Liability Losses Assumed Under Insured Contract

Item 5. **Transfer Of Rights Of Recovery Against Others To Us** of Paragraph A. **Loss Conditions** under **SECTION IV – BUSINESS AUTO CONDITIONS** is amended to read:

5. Transfer of Rights of Recovery Against Others To Us

If any person or organization to or for whom we make payments under this Coverage Form has rights to recover damages from another, those rights are transferred to us. That person or organization must do everything necessary to secure our rights and must do nothing after an "accident" or "loss" to impair them. However, if the insured has waived those rights to recover through a written contract, we will waive any right to recovery we may have under this Coverage Form.

Q. Insurance is Primary and Noncontributory

Subpart a. of Item 5. **Other Insurance** of Paragraph B. **General Conditions** under **SECTION IV – BUSINESS AUTO CONDITIONS** is amended to read:

- a. This insurance is primary and noncontributory, as respects any other insurance, if required in a written contract with you.

R. Other Insurance – Hired Auto Physical Damage

Subpart b. of Item 5. **Other Insurance** of Paragraph B. **General Conditions** under **SECTION IV – BUSINESS AUTO CONDITIONS** is amended to read:

- b. For **Hired Auto Physical Damage Coverage**, the following are deemed to be covered "autos" you own:
 - (1) Any covered "auto" you lease, hire, rent or borrow; and

- (2) Any covered "auto" hired or rented by your "employee" under a contract in that individual "employee's" name, with your permission, while performing duties related to the conduct of your business.

However, any "auto" that is leased, hired, rented or borrowed with a driver is not a covered "auto".

S. Unintentional Failure To Disclose Hazards

Paragraph **B. General Conditions** under **SECTION IV – BUSINESS AUTO CONDITIONS** is amended to add:

9. Your failure to disclose all hazards existing as of the inception date of this policy shall not prejudice the coverage afforded by this policy, provided that such failure to disclose all hazards is not intentional. However, you must report such previously undisclosed hazards to us as soon as practicable after its discovery.

T. Additional Definition

SECTION V – DEFINITIONS is amended to add:

"Personal effects" means personal property owned by the "insured".

"Downtime loss" means actual loss of "business income" for the period of time that a covered "auto":

1. Is out of service for repair or replacement as a result of a covered physical damage "loss" and
2. Is in the custody of a repair facility if not a total "loss".

"Business Income" means:

1. Net Income (Net Profit or Loss before income taxes) that would have been earned or incurred; and
2. Continuing normal operating expenses incurred, including payroll.

In this endorsement, **Headings and Titles** are inserted solely for the convenience and ease of reference. They do not affect the coverage provided by this endorsement, nor do they constitute any part of the terms and conditions of this endorsement. All other policy wording not specifically changed, modified, or replaced by this endorsement wording remains in effect.

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

ADDITIONAL INSURED - OWNERS, LESSEES OR CONTRACTORS - COMPLETED OPERATIONS

<i>Attached To and Forming Part of Policy</i> 0100077827-4	<i>Effective Date of Endorsement</i> 06/15/2023 12:01AM at the Named Insured address shown on the Declarations	<i>Named Insured</i> Tosted Asphalt Incorporated
<i>Additional Premium:</i> \$0	<i>Return Premium:</i> \$0	

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART
 PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE PART

SCHEDULE

Name of Additional Insured Person(s) or Organization(s)	Location and Description of Completed Operations
Blanket, as required by written contract, executed prior to the start of work on the project.	Locations as required and specified by written contract, executed prior to the start of work on the project.
Information required to complete this Schedule, if not shown above, will be shown in the Declarations.	

A. Section II – Who Is An Insured is amended to include as an additional insured the person(s) or organization(s) shown in the Schedule, but only with respect to liability for "bodily injury" or "property damage" caused, in whole or in part, by "your work" at the location designated and described in the Schedule of this endorsement performed for that additional insured and included in the "products-completed operations hazard".

However:

1. The insurance afforded to such additional insured only applies to the extent permitted by law; and
2. If coverage provided to the additional insured is required by a contract or agreement, the insurance afforded to such additional insured will not be broader than that which you are required by the contract or agreement to provide for such additional insured.

B. With respect to the insurance afforded to these additional insureds, the following is added to **Section III – Limits Of Insurance:**

If coverage provided to the additional insured is required by a contract or agreement, the most we will pay on behalf of the additional insured is the amount of insurance:

1. Required by the contract or agreement; or
 2. Available under the applicable limits of insurance;
- whichever is less.

This endorsement shall not increase the applicable limits of insurance.

ALL OTHER TERMS AND CONDITIONS OF THE POLICY REMAIN UNCHANGED.

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

ADDITIONAL INSURED - OWNERS, LESSEES OR CONTRACTORS - SCHEDULED PERSON OR ORGANIZATION

<i>Attached To and Forming Part of Policy</i> 0100077827-4	<i>Effective Date of Endorsement</i> 06/15/2023 12:01AM at the Named Insured address shown on the Declarations	<i>Named Insured</i> Tosted Asphalt Incorporated
<i>Additional Premium:</i> \$0	<i>Return Premium:</i> \$0	

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART

SCHEDULE	
Name of Additional Insured Person(s) or Organization(s)	Location(s) of Covered Operations
Blanket, as required by written contract, executed prior to the start of work on the project.	Locations as required and specified by written contract, executed prior to the start of work on the project.
Information required to complete this Schedule, if not shown above, will be shown in the Declarations.	

A. Section II – Who Is An Insured is amended to include as an additional insured the person(s) or organization(s) shown in the Schedule, but only with respect to liability for "bodily injury", "property damage" or "personal and advertising injury" caused, in whole or in part, by:

1. Your acts or omissions; or
2. The acts or omissions of those acting on your behalf;

in the performance of your ongoing operations for the additional insured(s) at the location(s) designated above.

However:

1. The insurance afforded to such additional insured only applies to the extent permitted by law; and
2. If coverage provided to the additional insured is required by a contract or agreement, the insurance afforded to such additional insured will not be broader than that which you are required by the contract or agreement to provide for such additional insured.

B. With respect to the insurance afforded to these additional insureds, the following additional exclusions apply:

This insurance does not apply to "bodily injury" or "property damage" occurring after:

1. All work, including materials, parts or equipment furnished in connection with such work, on the project (other than service, maintenance or repairs) to be performed by or on behalf of the additional insured(s) at the location of the covered operations has been completed; or
2. That portion of "your work" out of which the injury or damage arises has been put to its intended use by any person or organization other than another contractor or subcontractor engaged in performing operations for a principal as a part of the same project.

C. With respect to the insurance afforded to these additional insureds, the following is added to **Section III – Limits Of Insurance:**

If coverage provided to the additional insured is required by a contract or agreement, the most we will pay on behalf of the additional insured is the amount of insurance:

1. Required by the contract or agreement; or

2. Available under the applicable limits of insurance;
whichever is less.

This endorsement shall not increase the applicable limits of insurance.

ALL OTHER TERMS AND CONDITIONS OF THE POLICY REMAIN UNCHANGED.

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

ADDITIONAL INSURED - PRIMARY AND NON-CONTRIBUTORY ENDORSEMENT

<i>Attached To and Forming Part of Policy</i> 0100077827-4	<i>Effective Date of Endorsement</i> 06/15/2023 12:01AM at the Named Insured address shown on the Declarations	<i>Named Insured</i> Tosted Asphalt Incorporated
<i>Additional Premium:</i> \$0	<i>Return Premium:</i> \$0	

This endorsement modifies insurance provided under the following:

**COMMERCIAL GENERAL LIABILITY COVERAGE
PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE
ENVIRONMENTAL CONTRACTING AND PROFESSIONAL SERVICES LIABILITY COVERAGE
PRODUCTS POLLUTION LIABILITY COVERAGE
PREMISES ENVIRONMENTAL LIABILITY INSURANCE COVERAGE
ENVIRONMENTAL COMBINED LIABILITY POLICY - ALL COVERAGE PARTS**

The insurance provided to Additional Insureds shall be excess with respect to any other valid and collectible insurance available to the Additional Insured unless the written contract specifically requires that this insurance apply on a primary and non-contributory basis, in which case this insurance shall be primary and non-contributory.

ALL OTHER TERMS AND CONDITIONS OF THE POLICY REMAIN UNCHANGED.

THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.

WAIVER OF TRANSFER OF RIGHTS OF RECOVERY AGAINST OTHERS TO US (WAIVER OF SUBROGATION) - AUTOMATIC

<i>Attached To and Forming Part of Policy</i> 0100077827-4	<i>Effective Date of Endorsement</i> 06/15/2023 12:01AM at the Named Insured address shown on the Declarations	<i>Named Insured</i> Tosted Asphalt Incorporated
<i>Additional Premium:</i> \$0	<i>Return Premium:</i> \$0	

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART
ELECTRONIC DATA LIABILITY COVERAGE PART
LIQUOR LIABILITY COVERAGE PART
POLLUTION LIABILITY COVERAGE PART DESIGNATED SITES
POLLUTION LIABILITY LIMITED COVERAGE PART DESIGNATED SITES
PRODUCTS/COMPLETED OPERATIONS LIABILITY COVERAGE PART
RAILROAD PROTECTIVE LIABILITY COVERAGE PART
UNDERGROUND STORAGE TANK POLICY DESIGNATED TANKS

The following is added to Paragraph 8. Transfer Of Rights Of Recovery Against Others To Us of Section IV – Conditions:

We waive any right of recovery against any person or organization, because of any payment we make under this Coverage Part, to whom the insured has waived its right of recovery in a written contract or agreement. Such waiver by us applies only to the extent that the insured has waived its right of recovery against such person or organization prior to loss.

ALL OTHER TERMS AND CONDITIONS OF THE POLICY REMAIN UNCHANGED.

WAIVER OF OUR RIGHT TO RECOVER FROM OTHERS ENDORSEMENT-CALIFORNIA

We have the right to recover our payments from anyone liable for an injury covered by this policy. We will not enforce our right against the person or organization named in the Schedule. (This agreement applies only to the extent that you perform work under a written contract that requires you to obtain this agreement from us.)

You must maintain payroll records accurately segregating the remuneration of your employees while engaged in the work described in the Schedule.

Blanket Waiver: The additional premium for this endorsement shall be 2% of the California workers' compensation premium otherwise due on such remuneration.

Specific Waiver: The additional premium for this endorsement shall be 5% of the California workers' compensation premium otherwise due on such remuneration.

Schedule

Person or Organization

Blanket Waiver of Subrogation

Job Description

As respects to all CA jobs performed by the named insured during the policy period where by written contract a waiver of subrogation is required prior to the commencement of work.

This endorsement changes the policy to which it is attached and is effective on the date issued unless otherwise stated.

(The information below is required only when this endorsement is issued subsequent to preparation of the policy.)

Endorsement Effective: 06/15/2023
Insured Tosted Asphalt Incorporated

Policy No.: PSIC09937 - 04
Insurance Company Palomar Specialty Insurance Company

Endorsement No.:

Countersigned By _____

